

Fantasy

GREENTEK LIGHTING

01

01 Our team has been innovating in the LED lighting field for over 15 years.

02 We are pioneers in special temperature colors for retail.

03 We provide custom LED lighting solutions tailored to your unique business needs.



05 We are crazy about customer care. Each customer has a dedicated account manager.

04 We are committed to manufacturing our products in the EU – from sourcing to finished product.



Account Management

Turnkey solution with dedicated account management. All your specifications are gathered and complete the proposed project.



R&D

We design and test any type of luminaire according to your needs. Our lab develops new luminaires and new special color temperatures.



Concept

We create the light concept that uniquely identifies your brand. The light concept is based on the latest market trends, industry specifics and EU norms.



On-site Implementation

We configure the luminaires and sensors. If intelligent lighting system is included, our team will do/assist the system set-up.



Customer Care

Post implementation support for lighting and control system.



About Fantasy

GREENTEK LIGHTING


02

Fantasy, the Peak of Creativity

Introducing **Fantasy**, a versatile lighting solution with unique features:

The **Fantasy luminaire** brings together **innovation**, **versatility**, and **precise lighting control** to elevate the ambiance and aesthetics of any space. Its impressive range of features provides **endless possibilities for creative lighting installations**.

Ignite your imagination and **illuminate with style** as **Fantasy** redefines lighting possibilities, transforming spaces into **captivating realms of ambiance and artistic expression**.

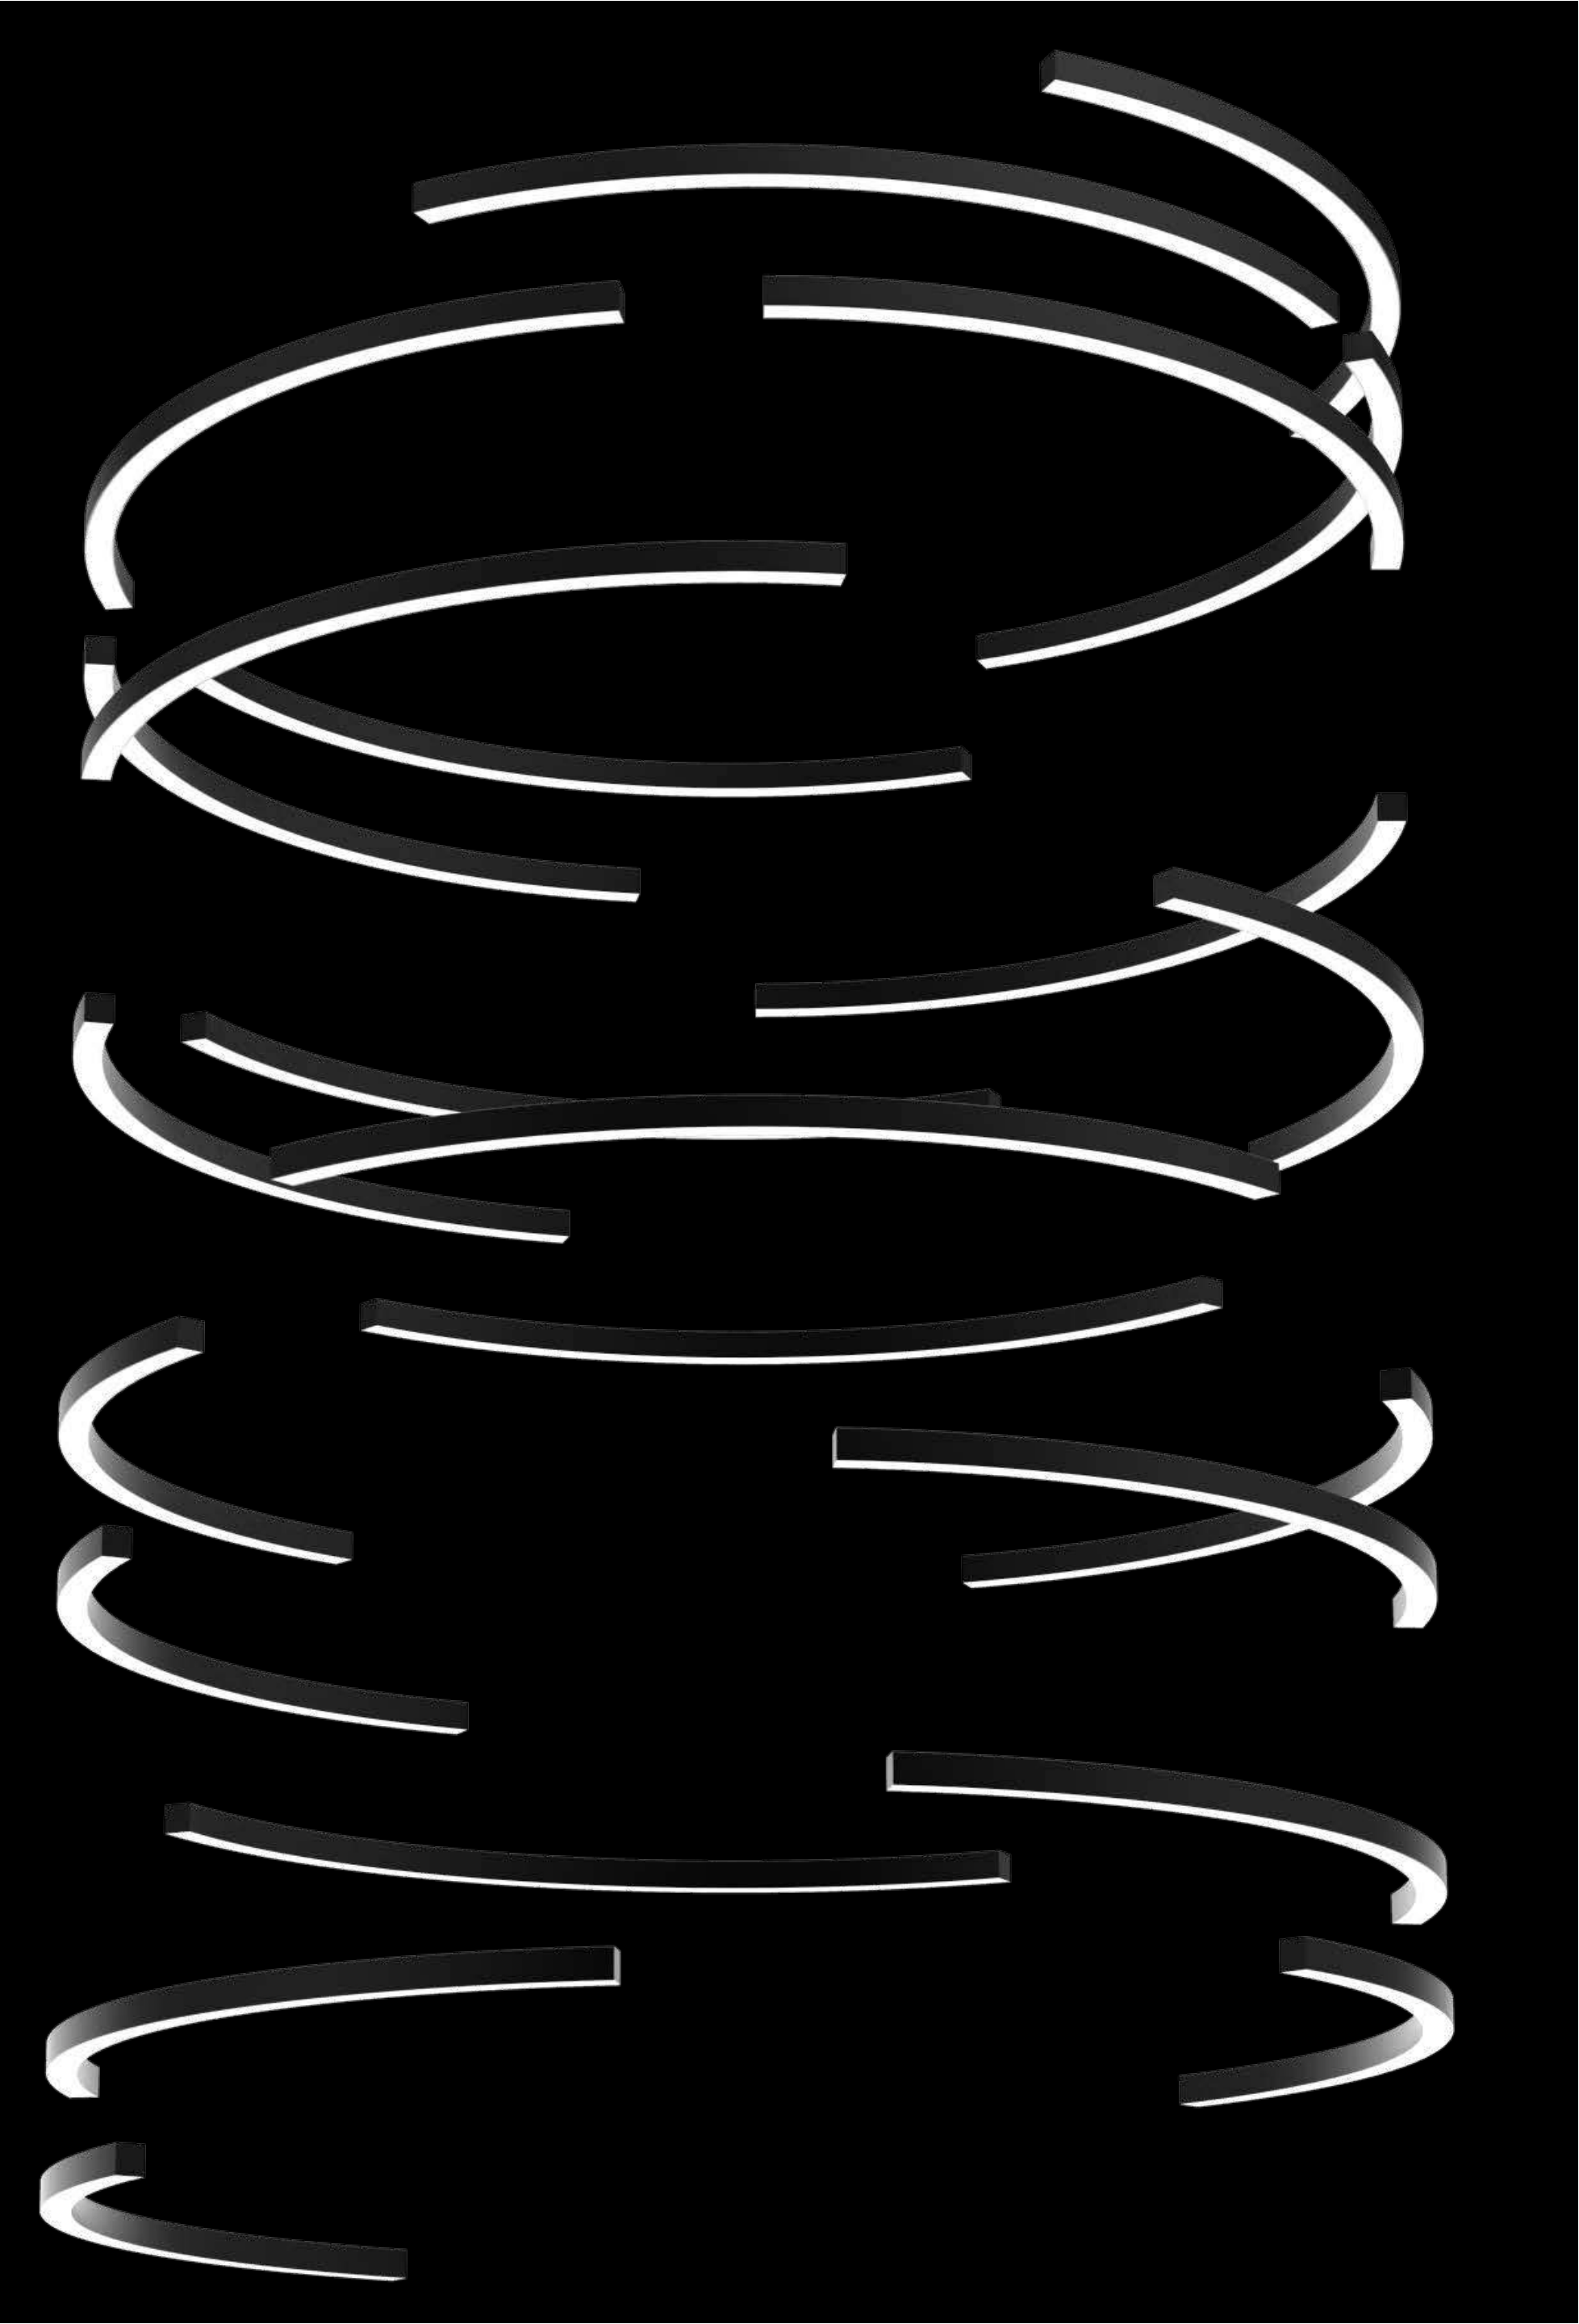

Fantasy Features & Benefits

Curved/Straight Line Lighting: Create curved or straight line installations to match your space.

Wide Range of Sizes: Available in diameters from 320mm to 3000mm, with 45°/90° radians.

Spliceable with Flexible Diffuser: Easily splice using a 20m/roll flexible diffuser for seamless integration.


Creative 3D Styling: Twist the luminaire 90°/180° for imaginative 3D lighting designs.


Modular Design: Combine and interconnect modules for flexible and scalable configurations.

Ultra-long Applications: Achieve extended lengths without additional splicing using the flexible diffuser.


Multiple Lighting Types: Downward, outward, inward, left 90° twist, right 90° twist, and 180° twist.

Precise Light Distribution: Adjust and shape light distribution with multiple accessories.



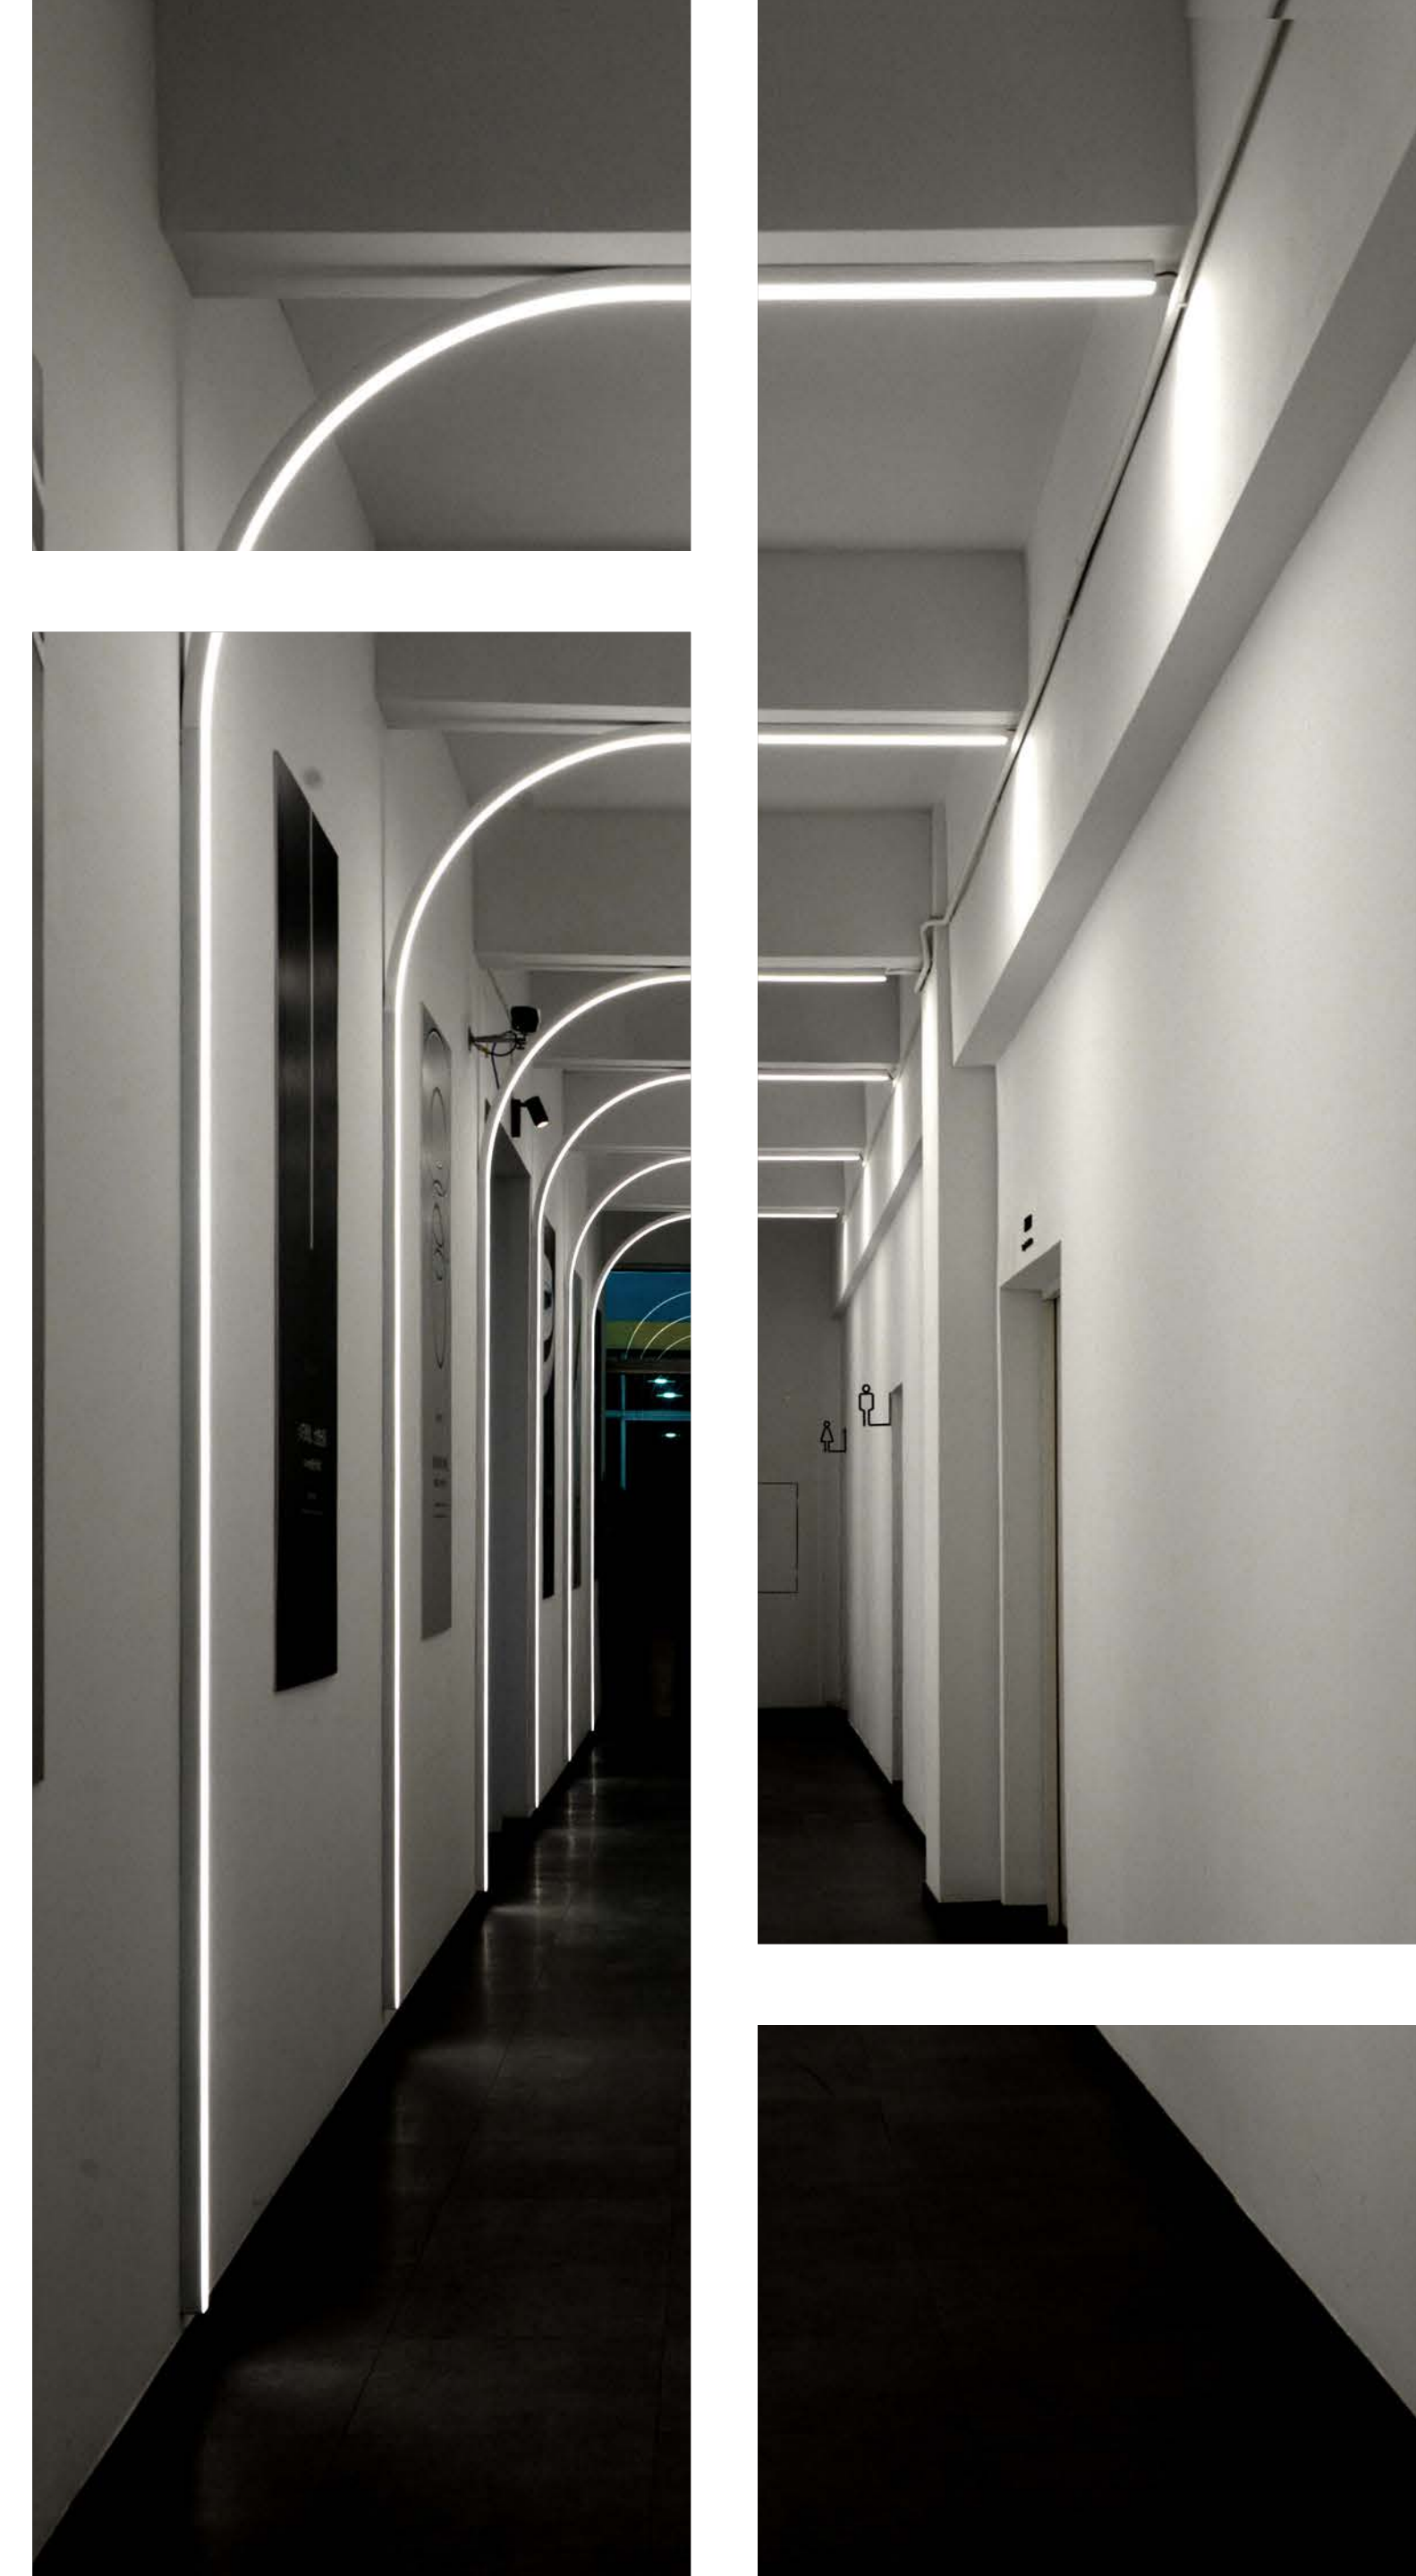


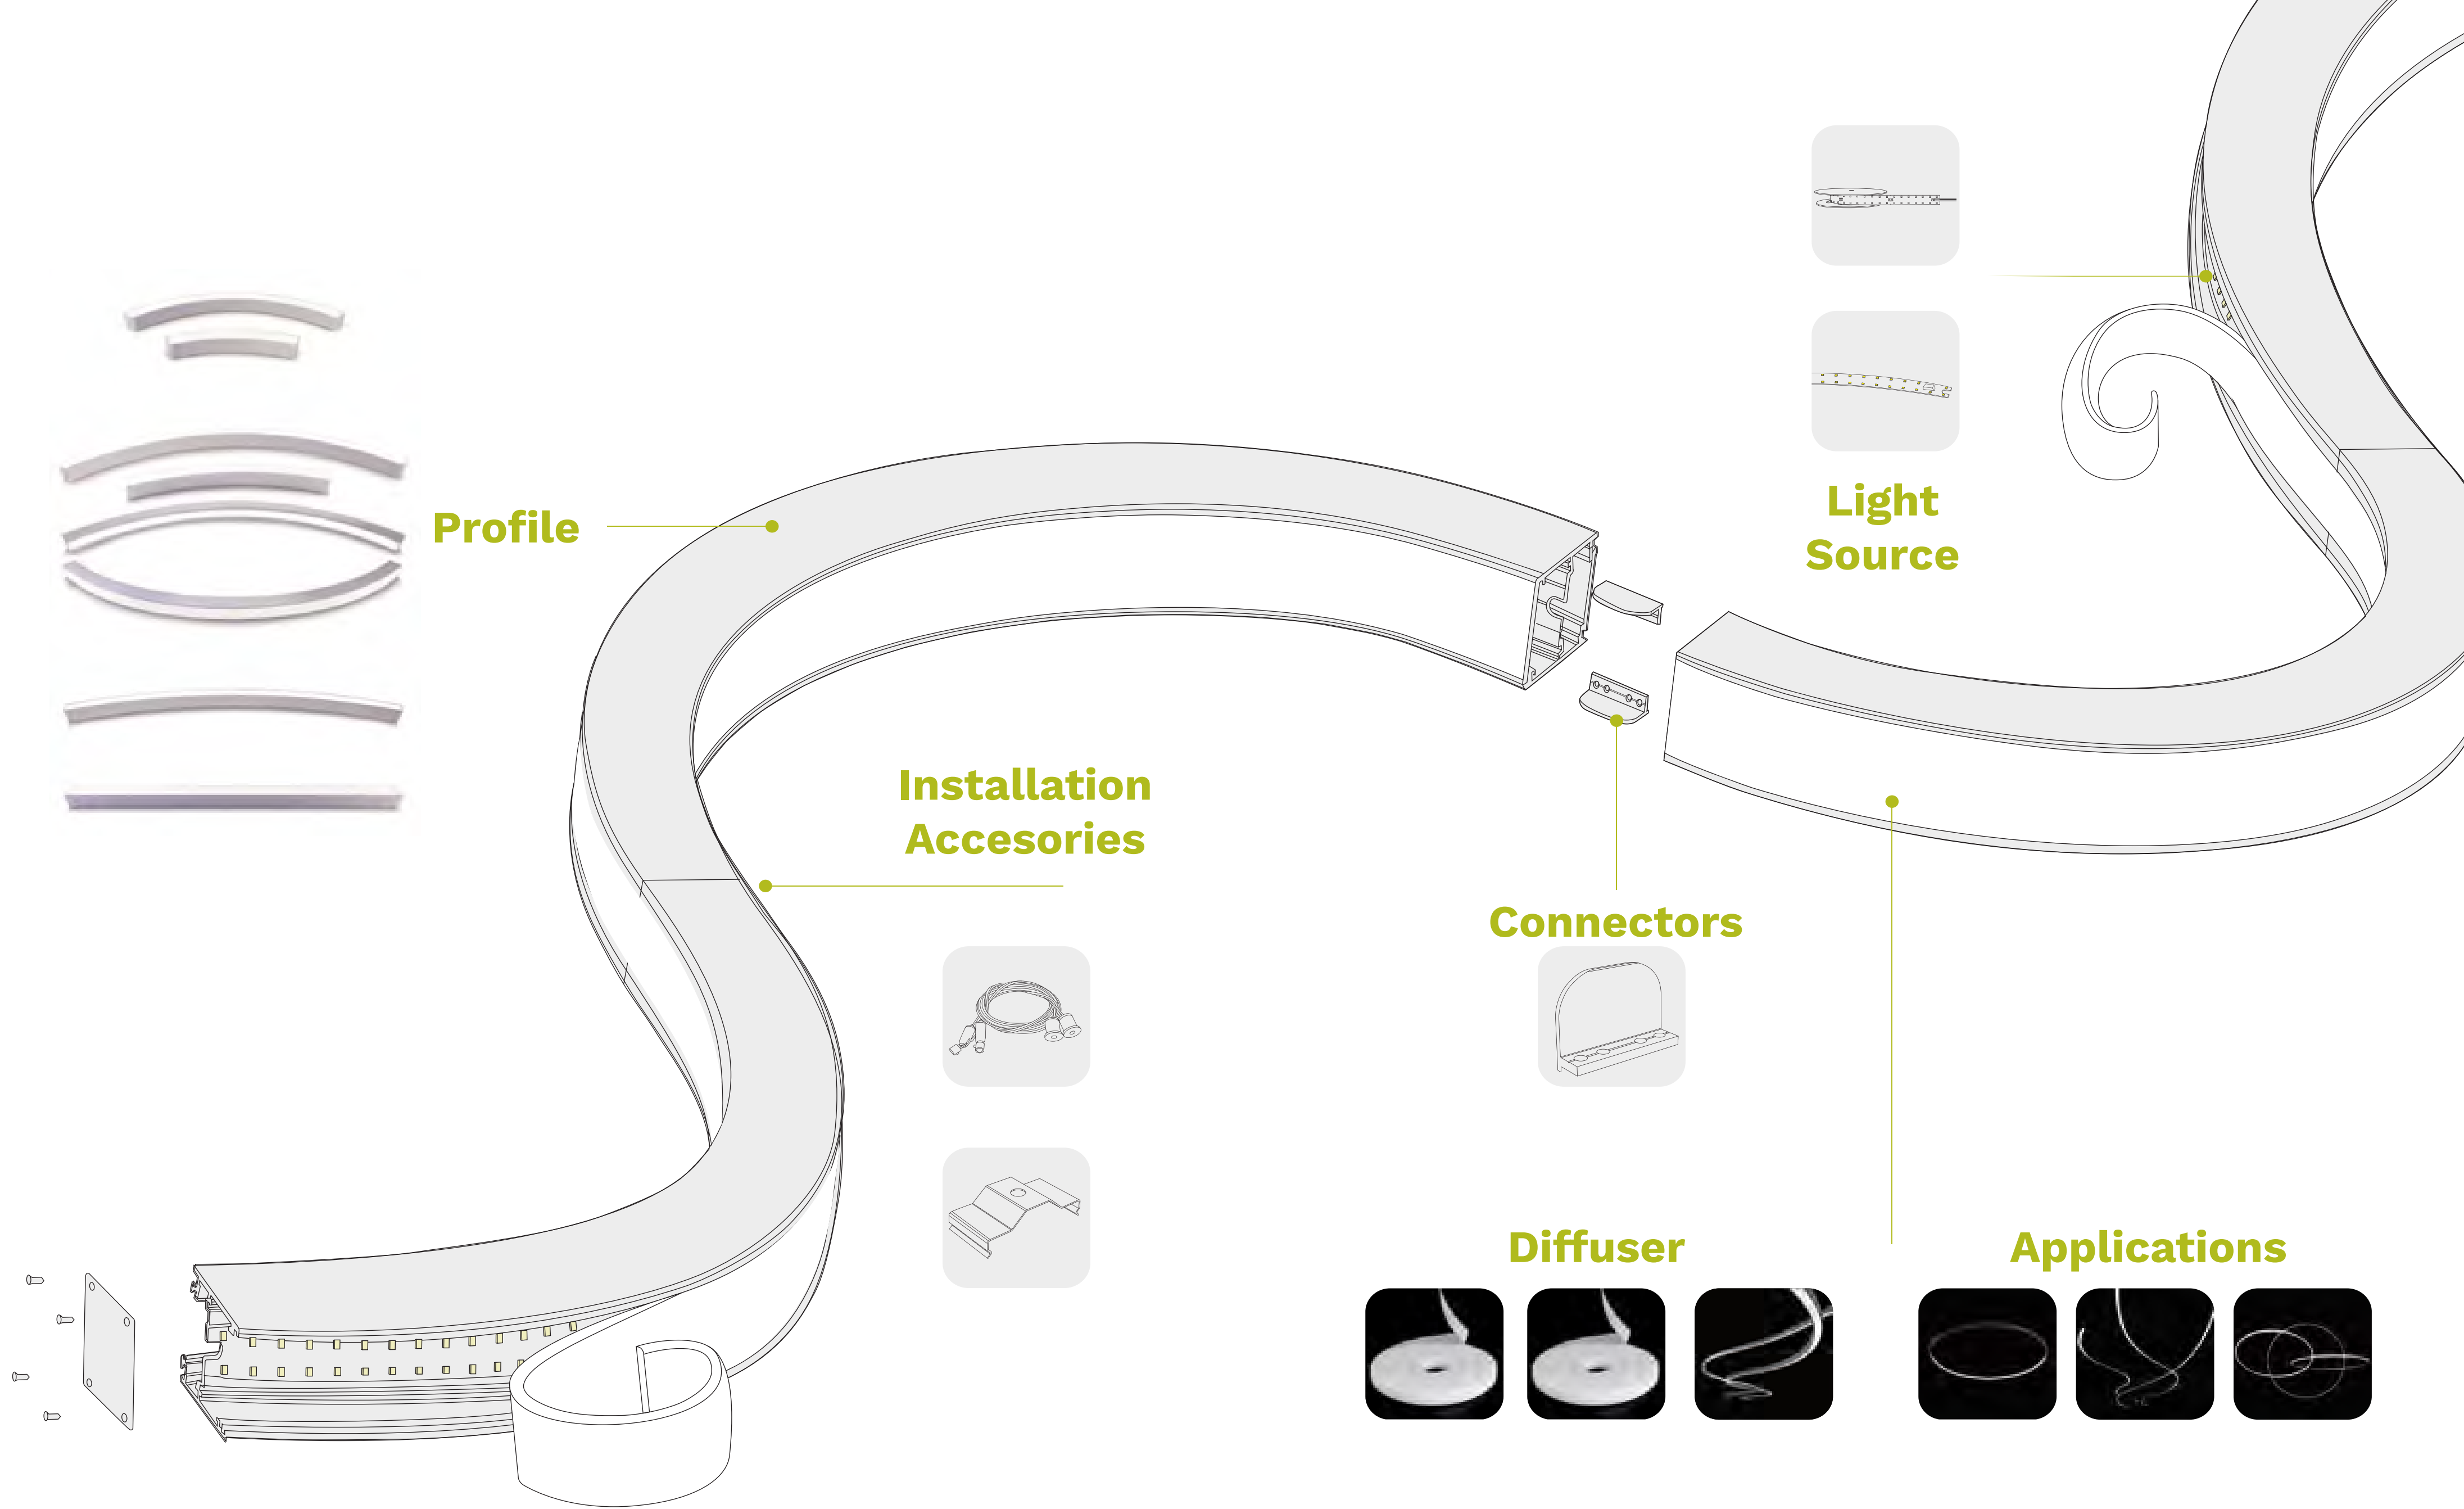



Connectors

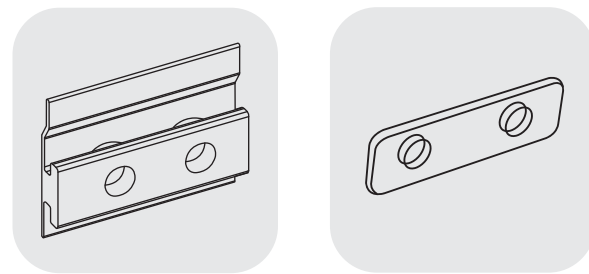

**Installation
Accessories**




**Light
Source**




Profile




Diffuser

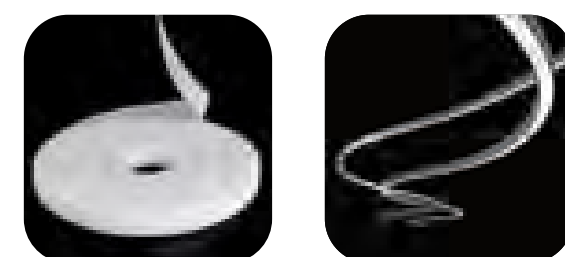

Applications

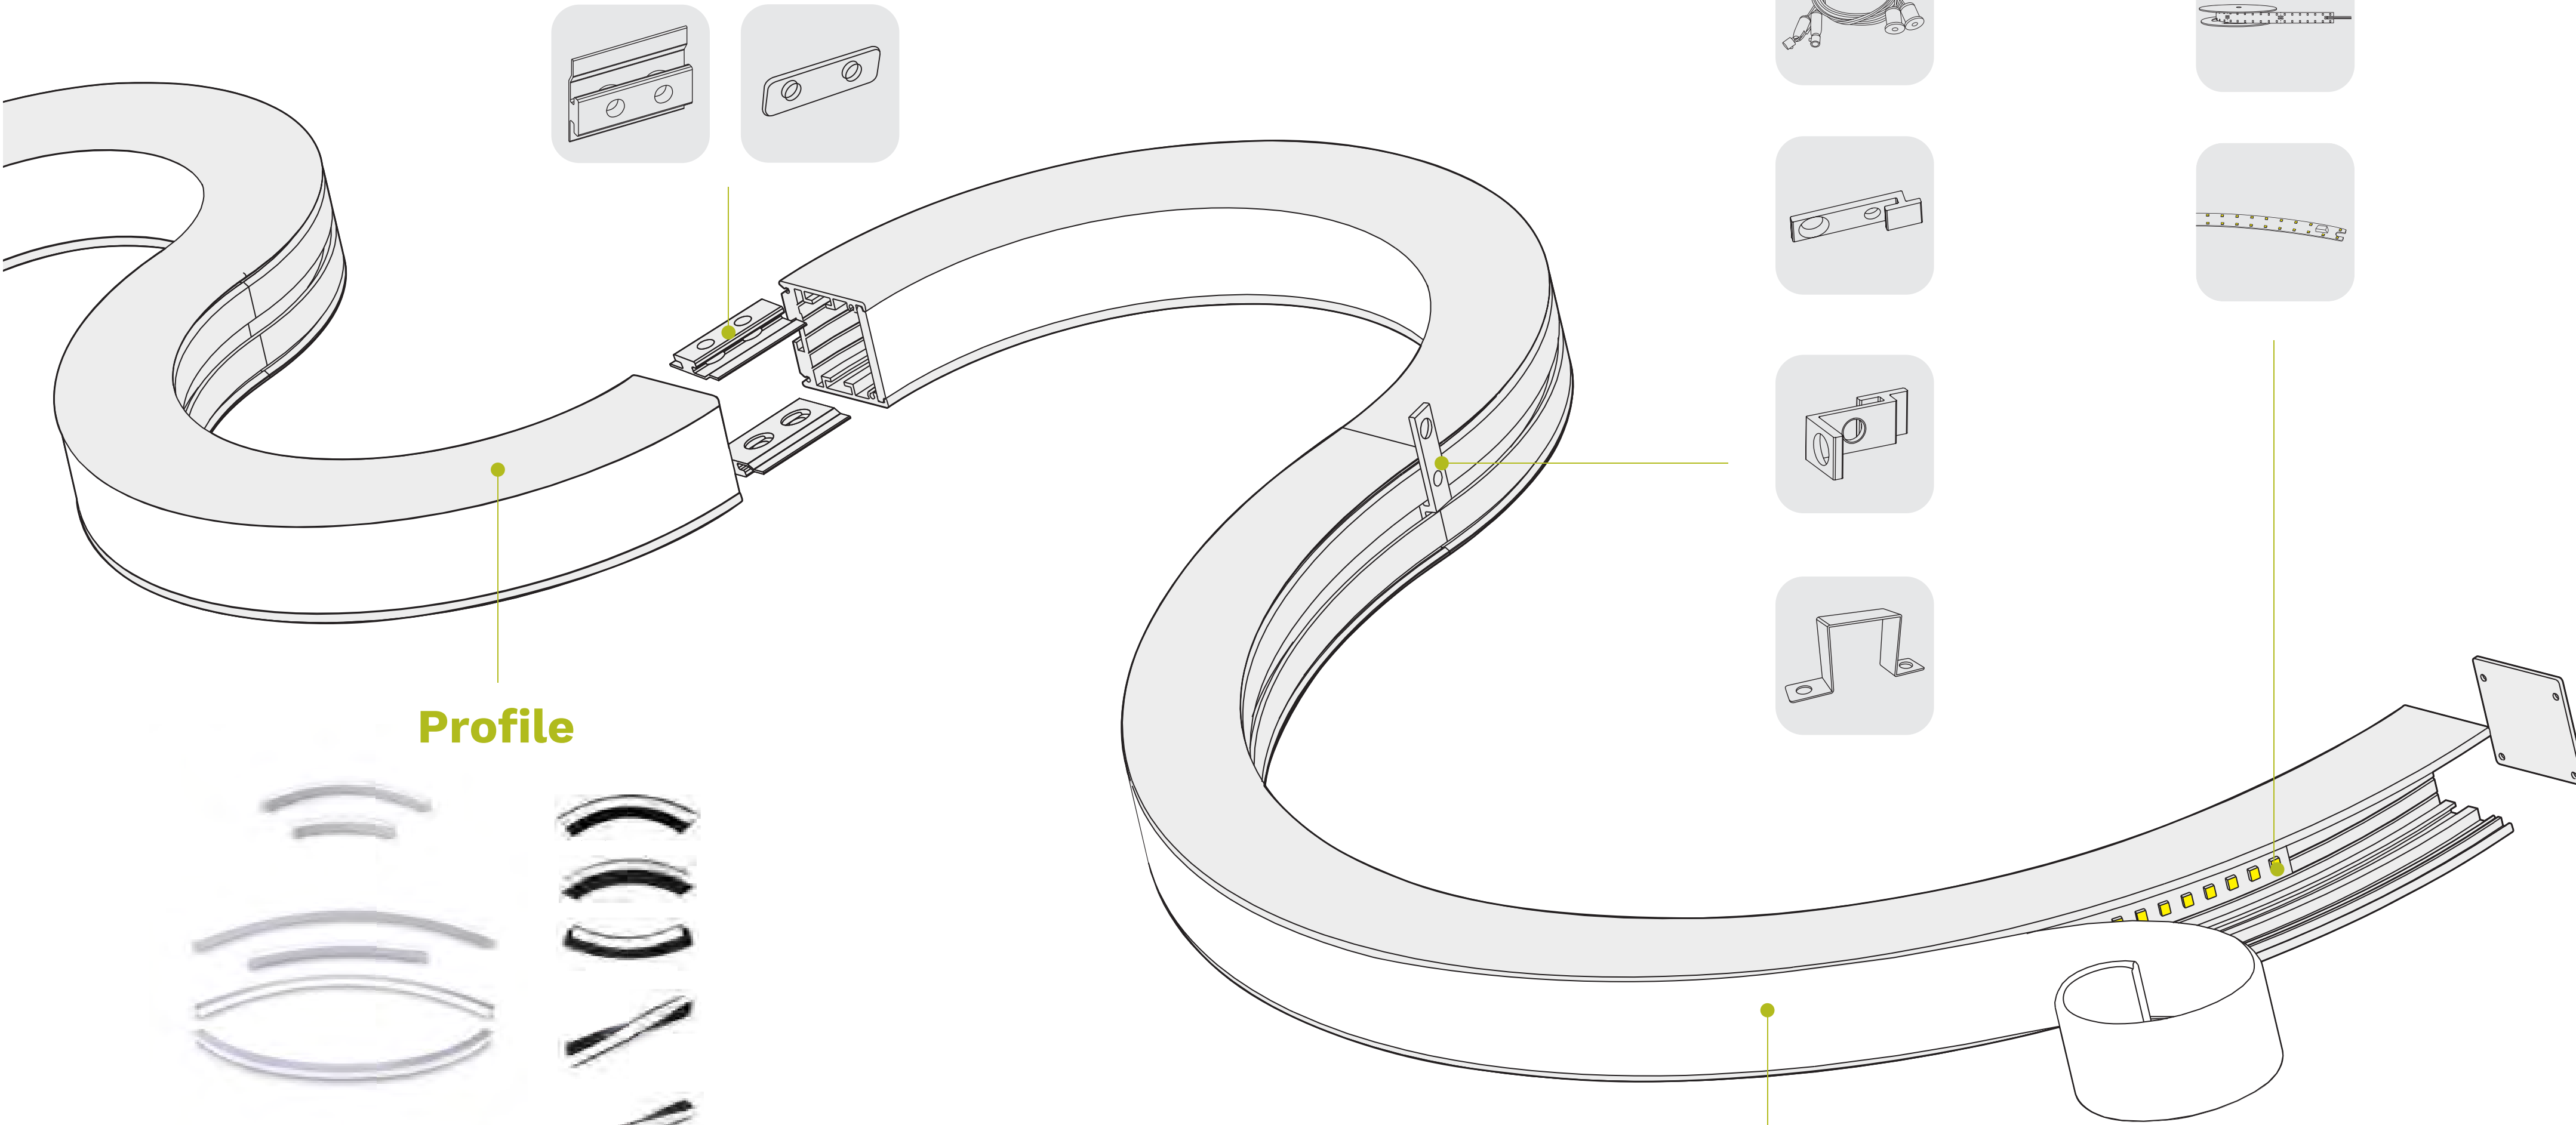

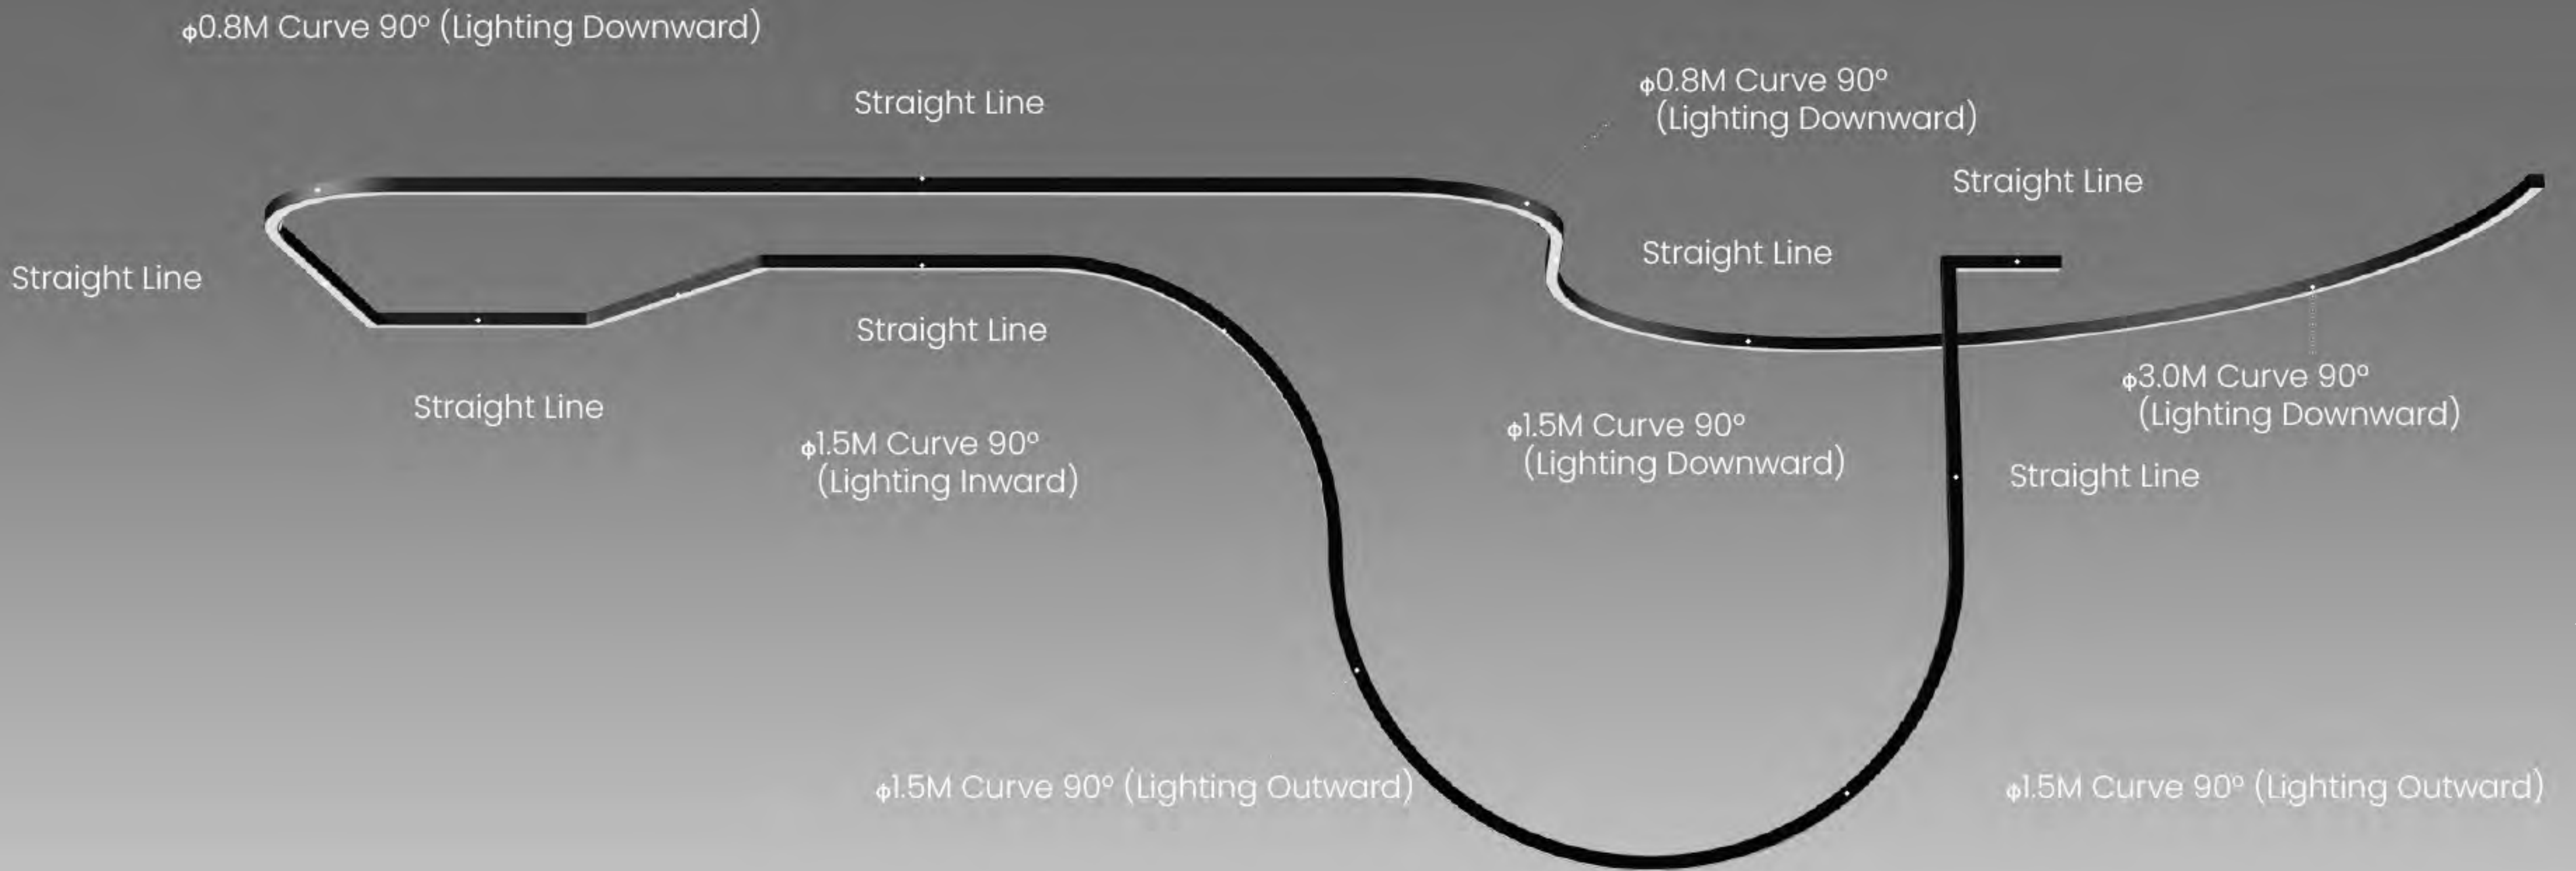



Fantasy 3535 Series

GREENTEK LIGHTING

03

Fantasy 3535-03A90



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	810LM/M	24V	5.4W/ m	D320x90°x20 x5.8mm	48LEDs	16LEDs

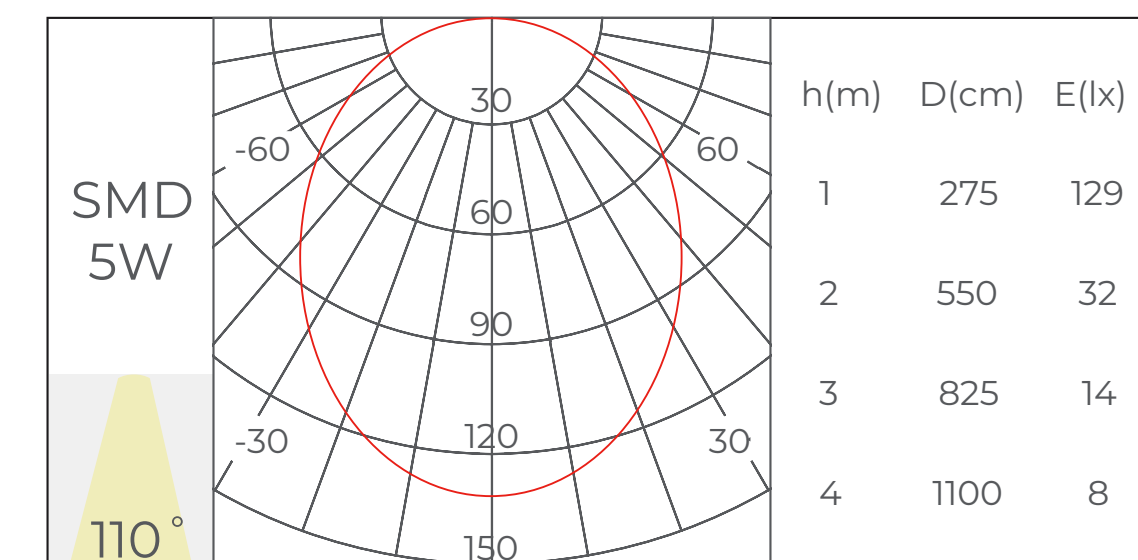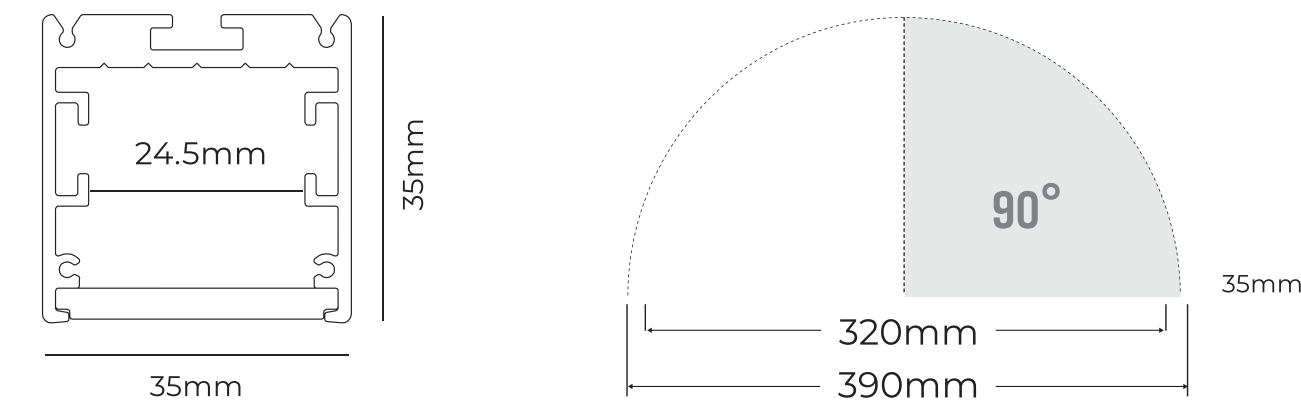

Fantasy 3535-03N90



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Inward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

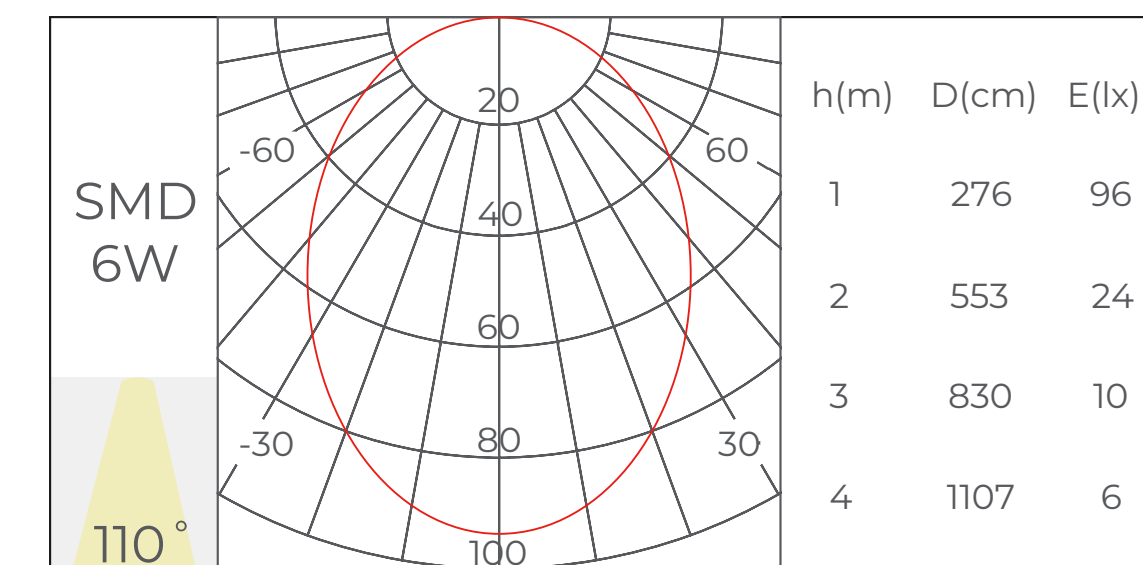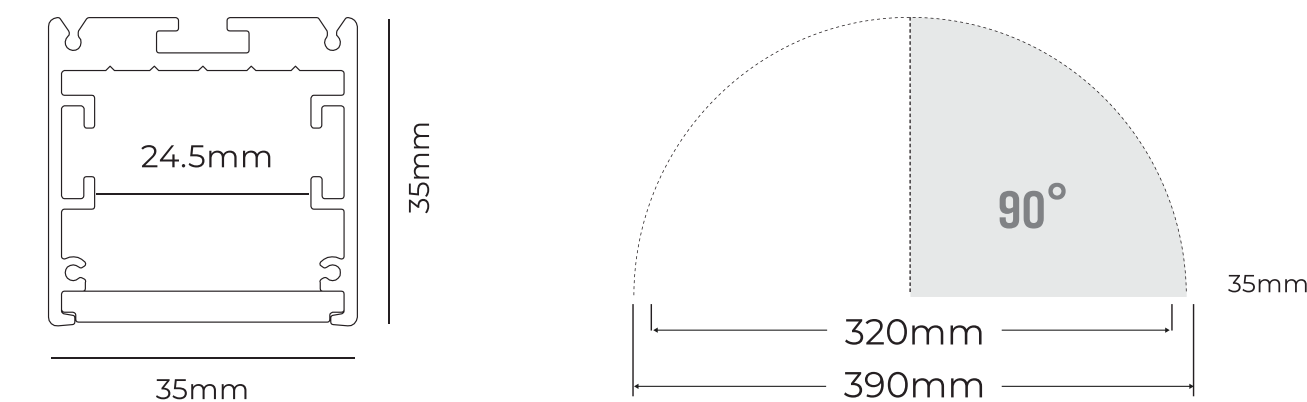

Fantasy 3535-03W90



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Outward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

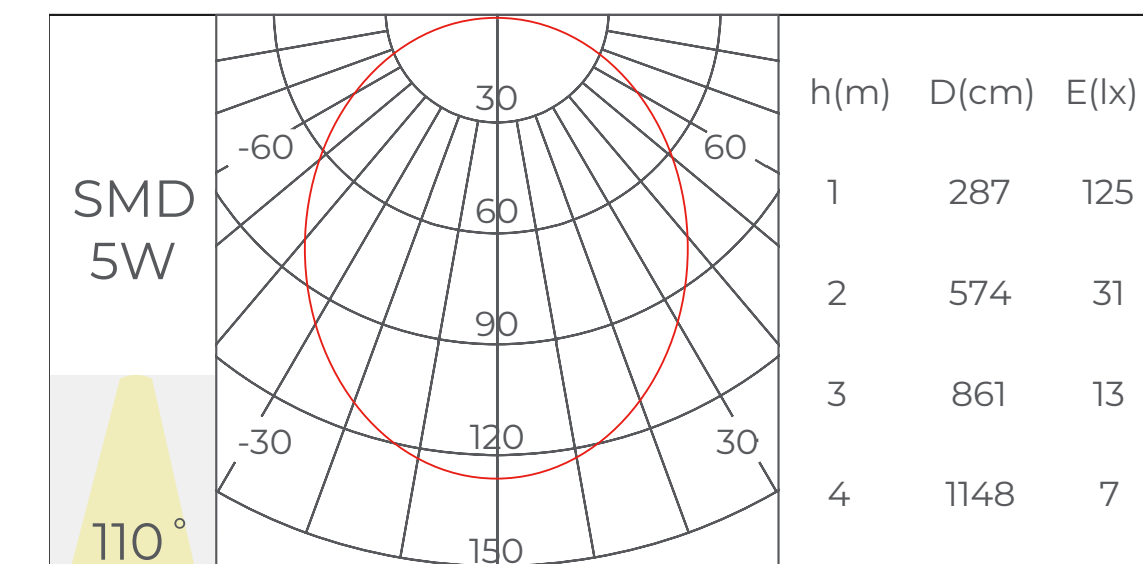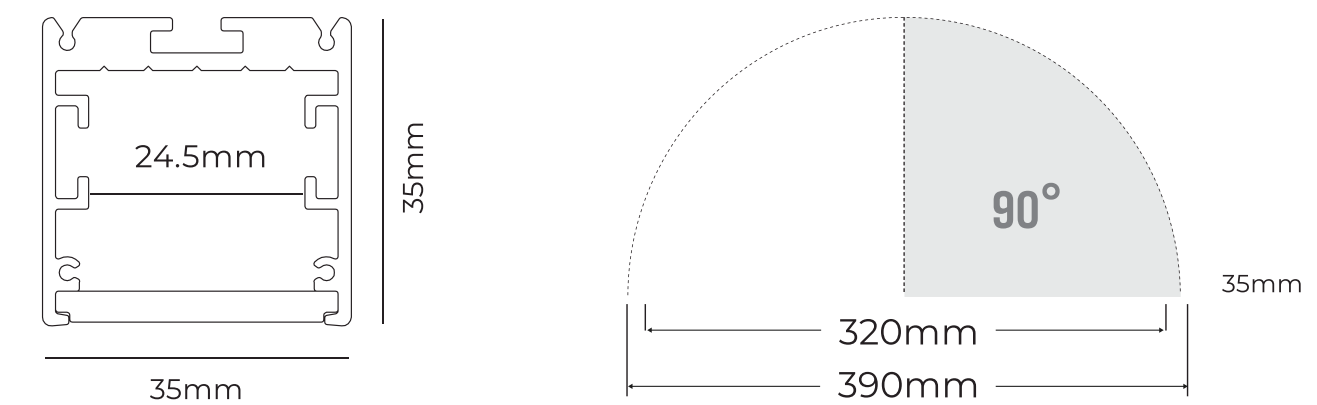

Fantasy 3535-04T90L



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

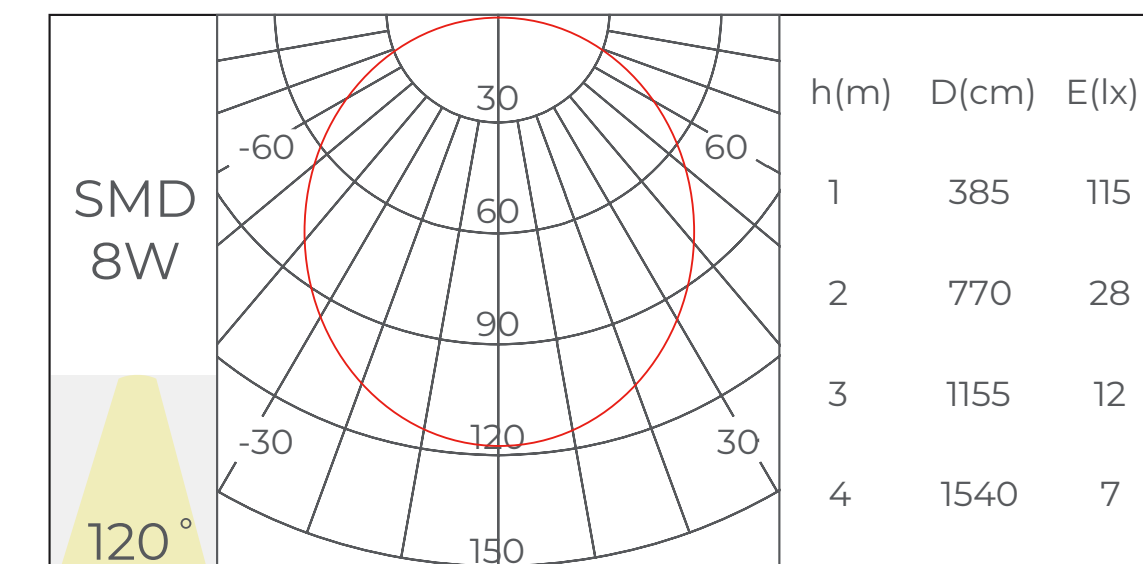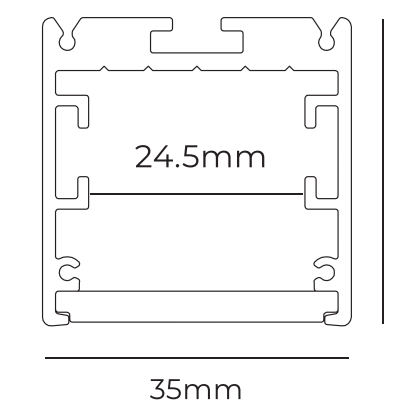

Fantasy 3535-04T90R



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

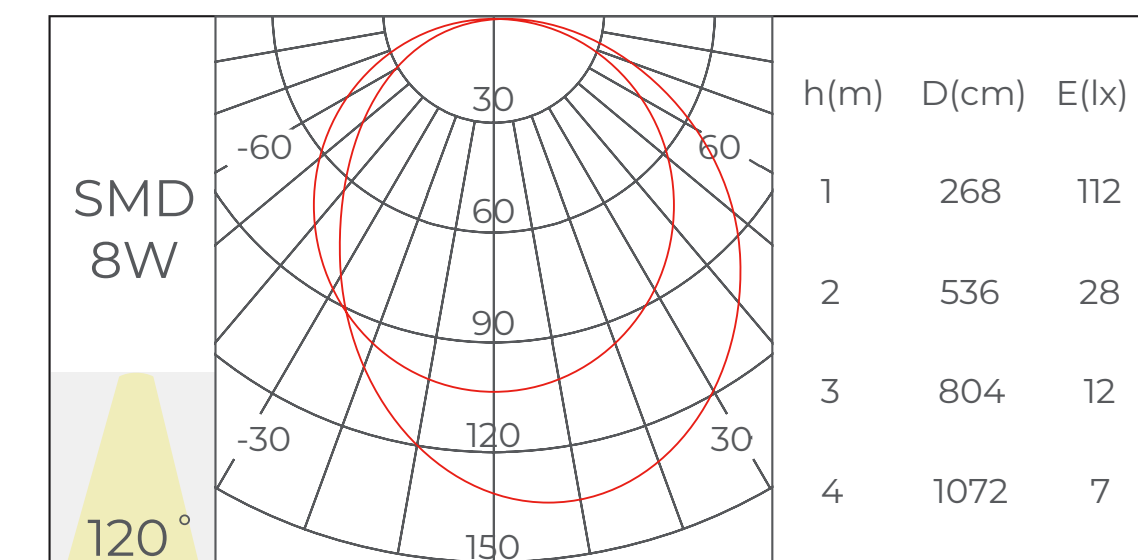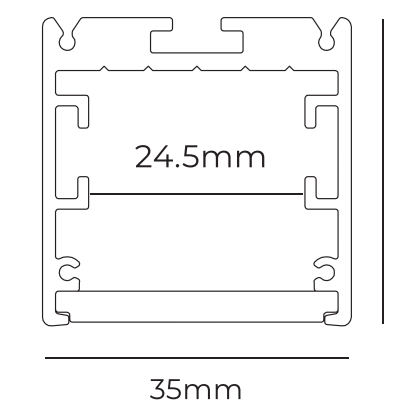

Fantasy 3535-05T180



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

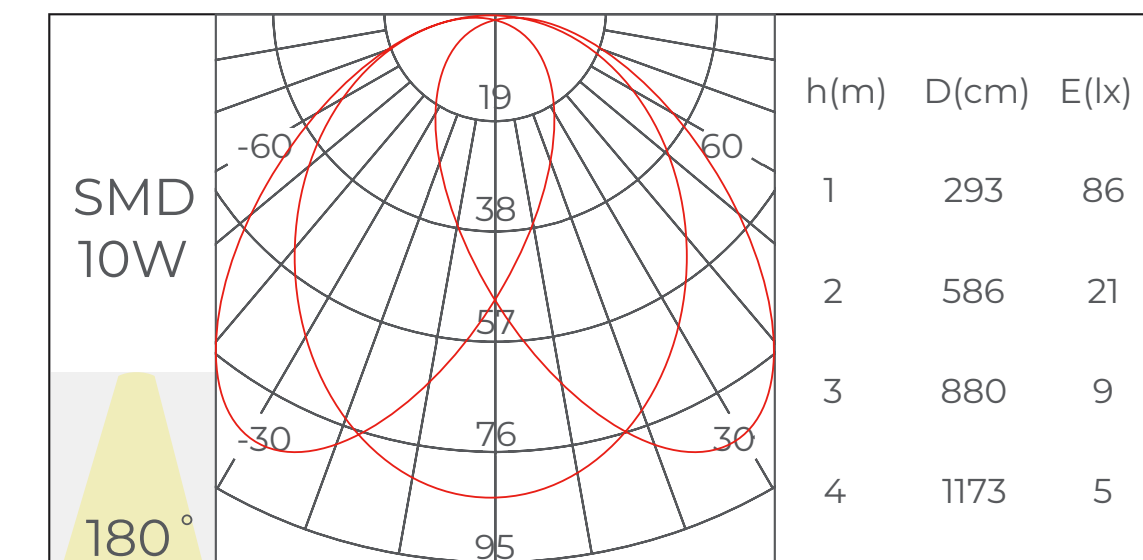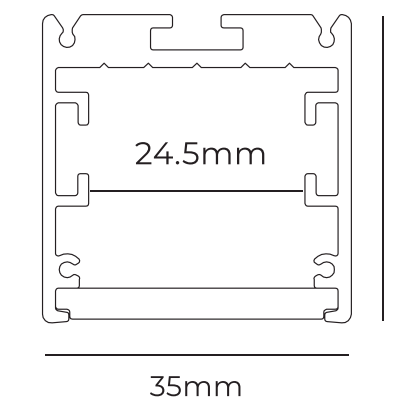

Fantasy 3535-08A45/90





Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	870LM/pcs	24V	5.8W/ m	D800x45°x20x 5.8mm	48LEDs	16LEDs

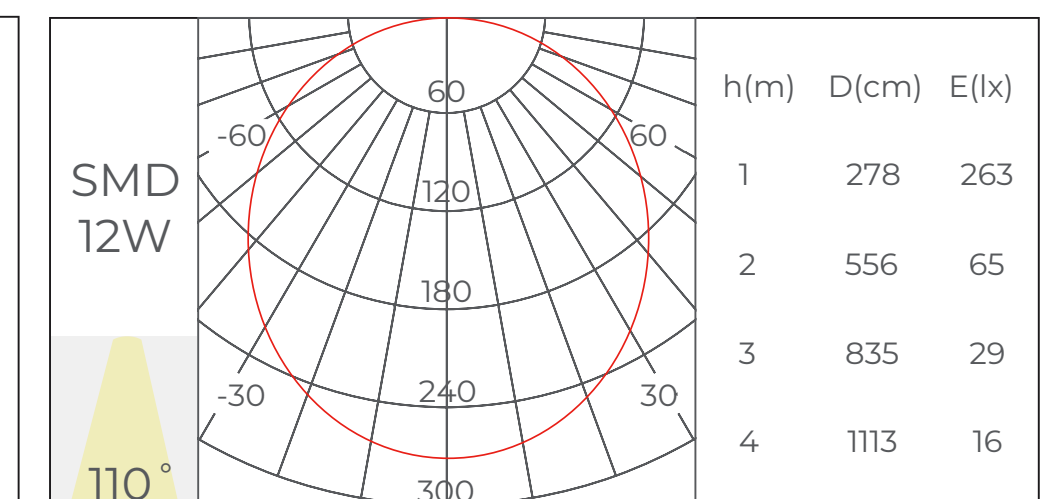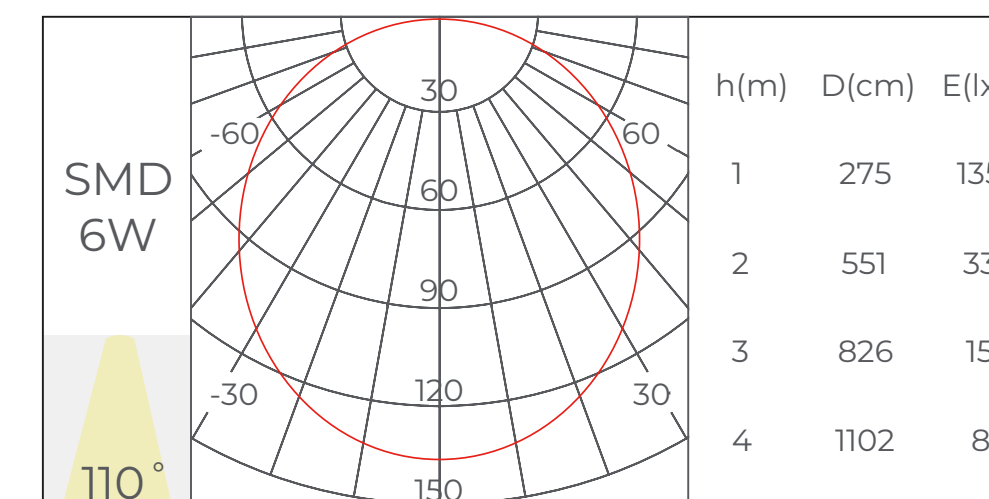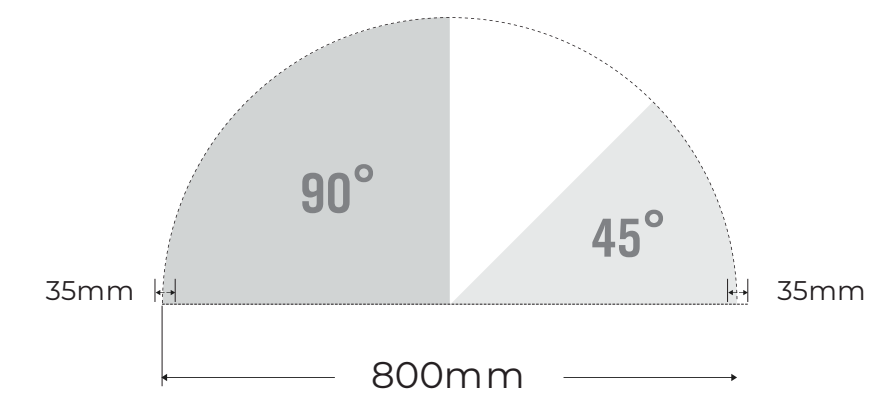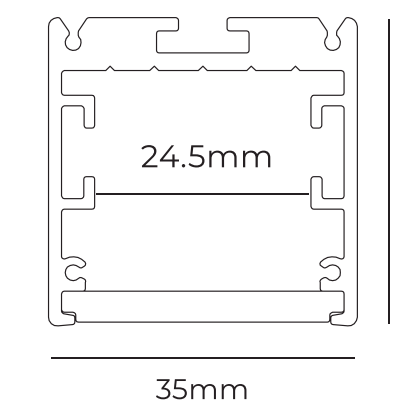

Fantasy 3535-15A45/90





Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D1500x45°x20 x5.8mm	96LEDs	16LEDs

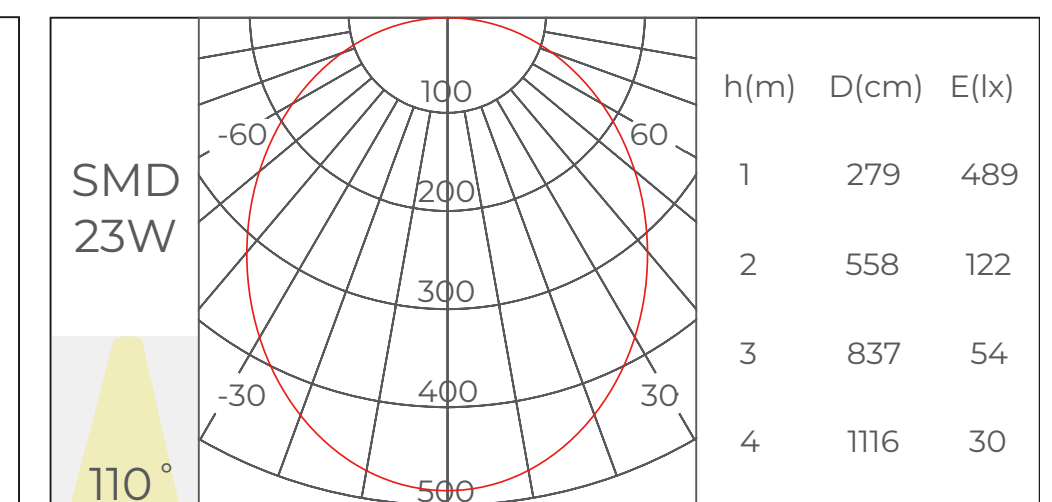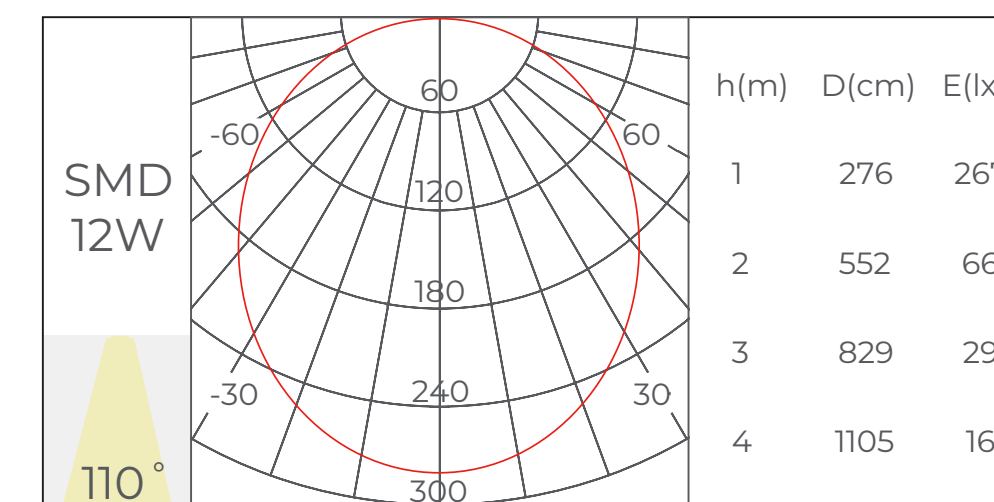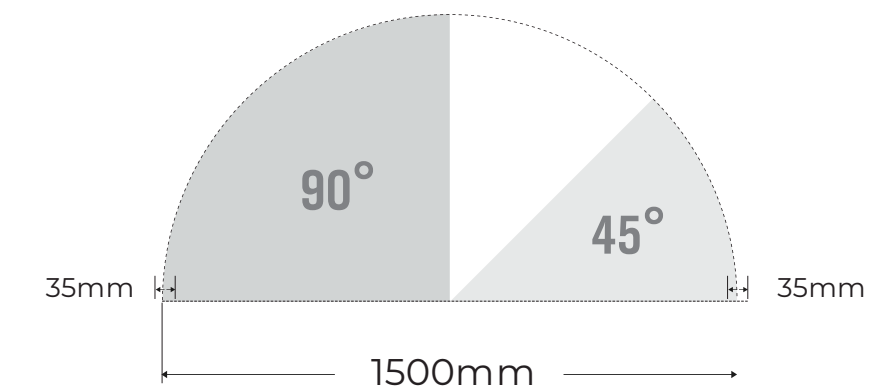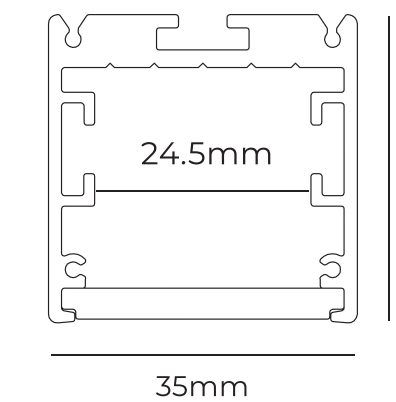

Fantasy 3535-30A45



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:


Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D3000x22.5°x 20x5.8mm	96LEDs	16LEDs

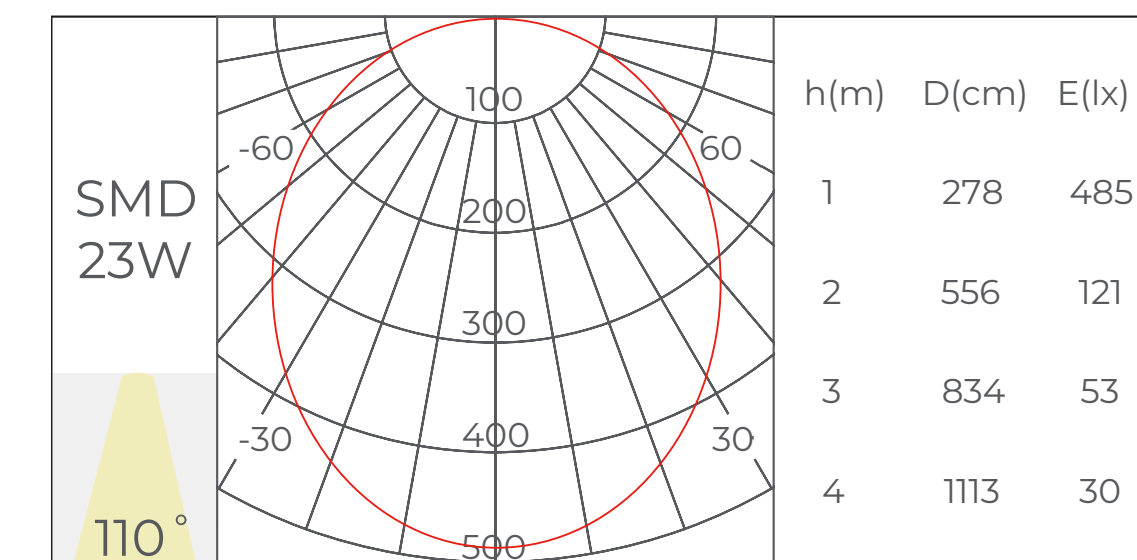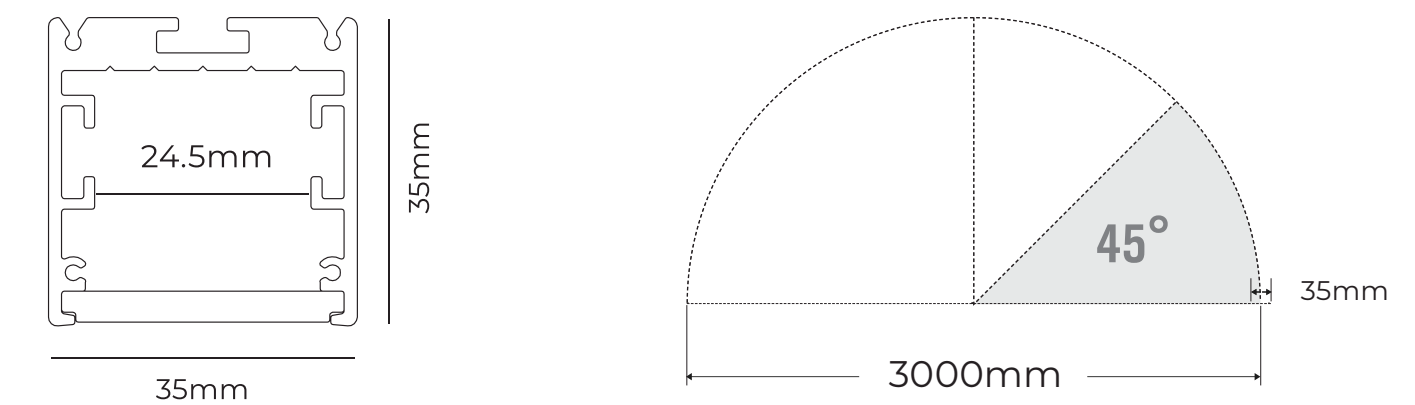

Fantasy 3535-2500



Features & Benefits:

- **Installation:** Pendant, Ceiling, Trimless recessed
- **Lighting direction:** Downward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K

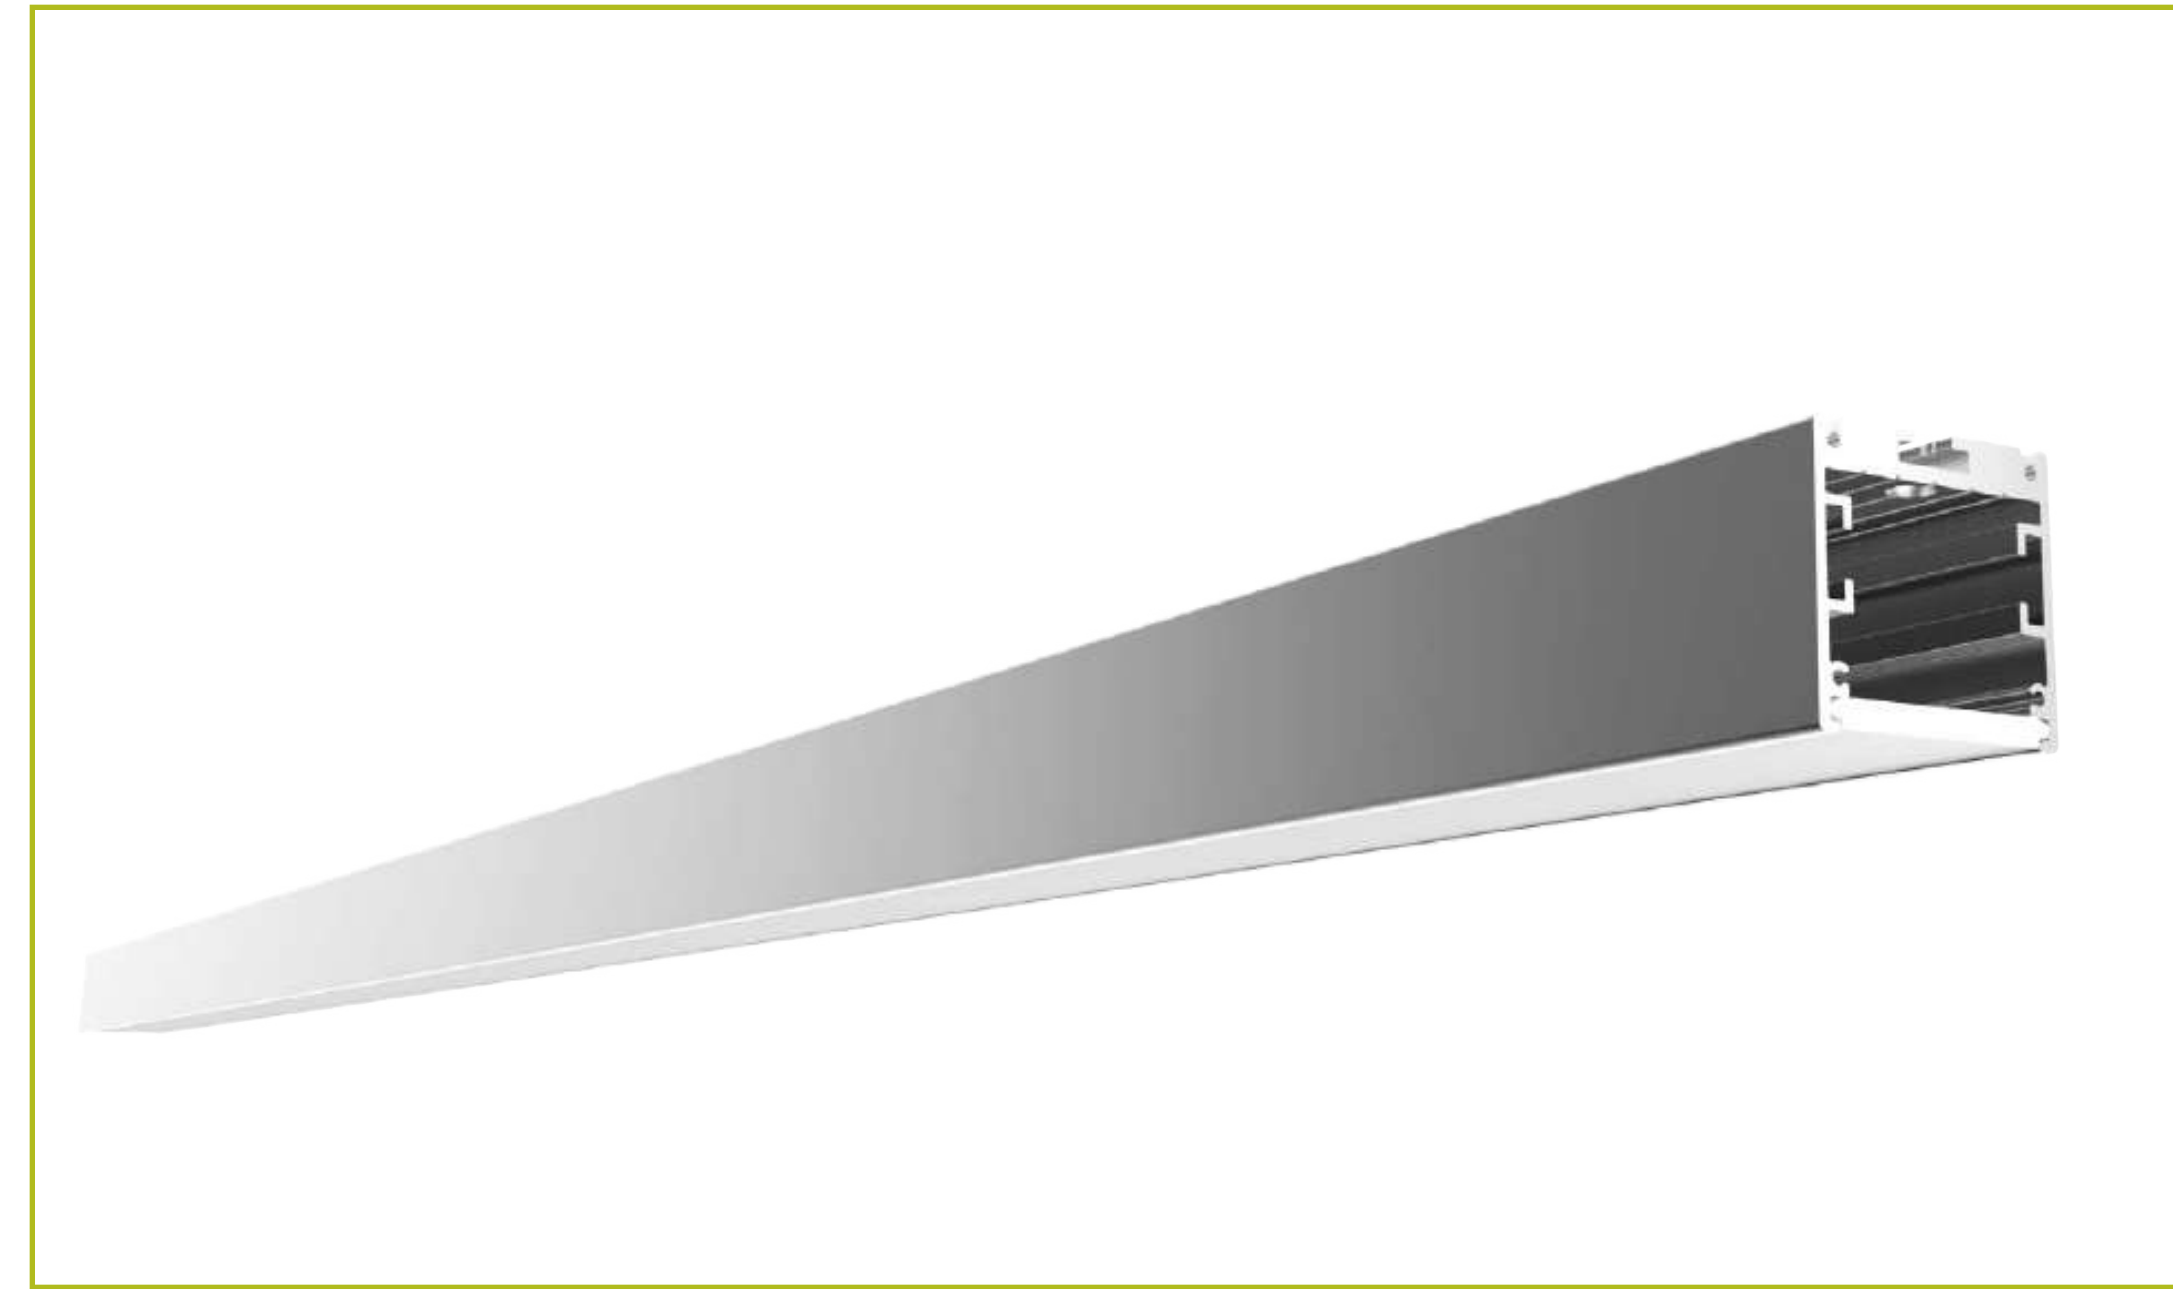

Basic Parameters:


Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

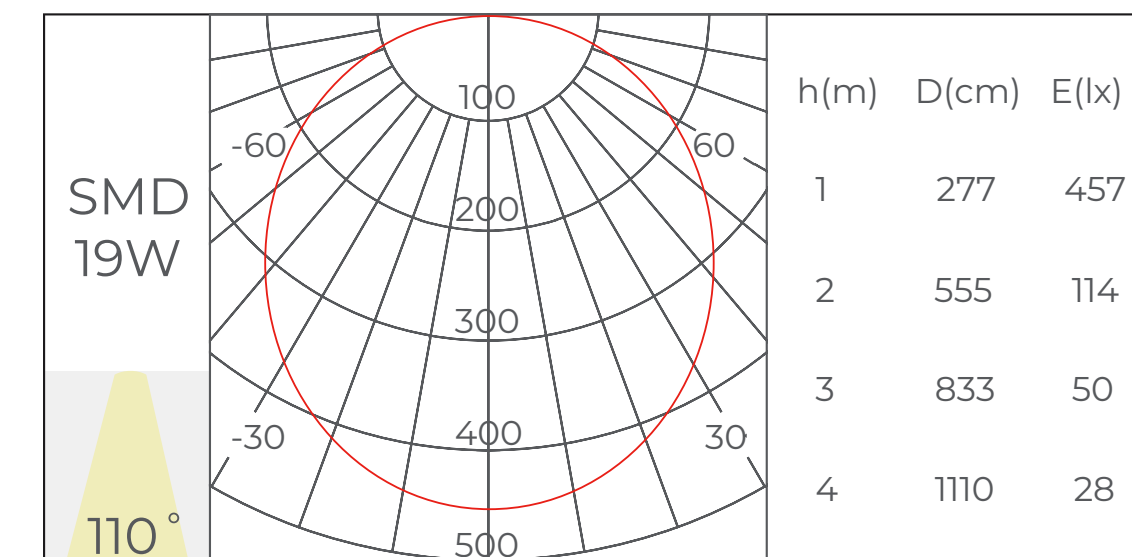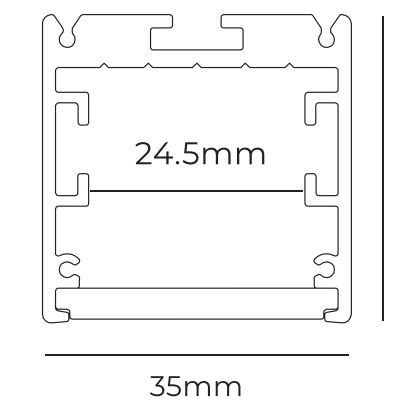

Fantasy 3535-15N90



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Inward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K

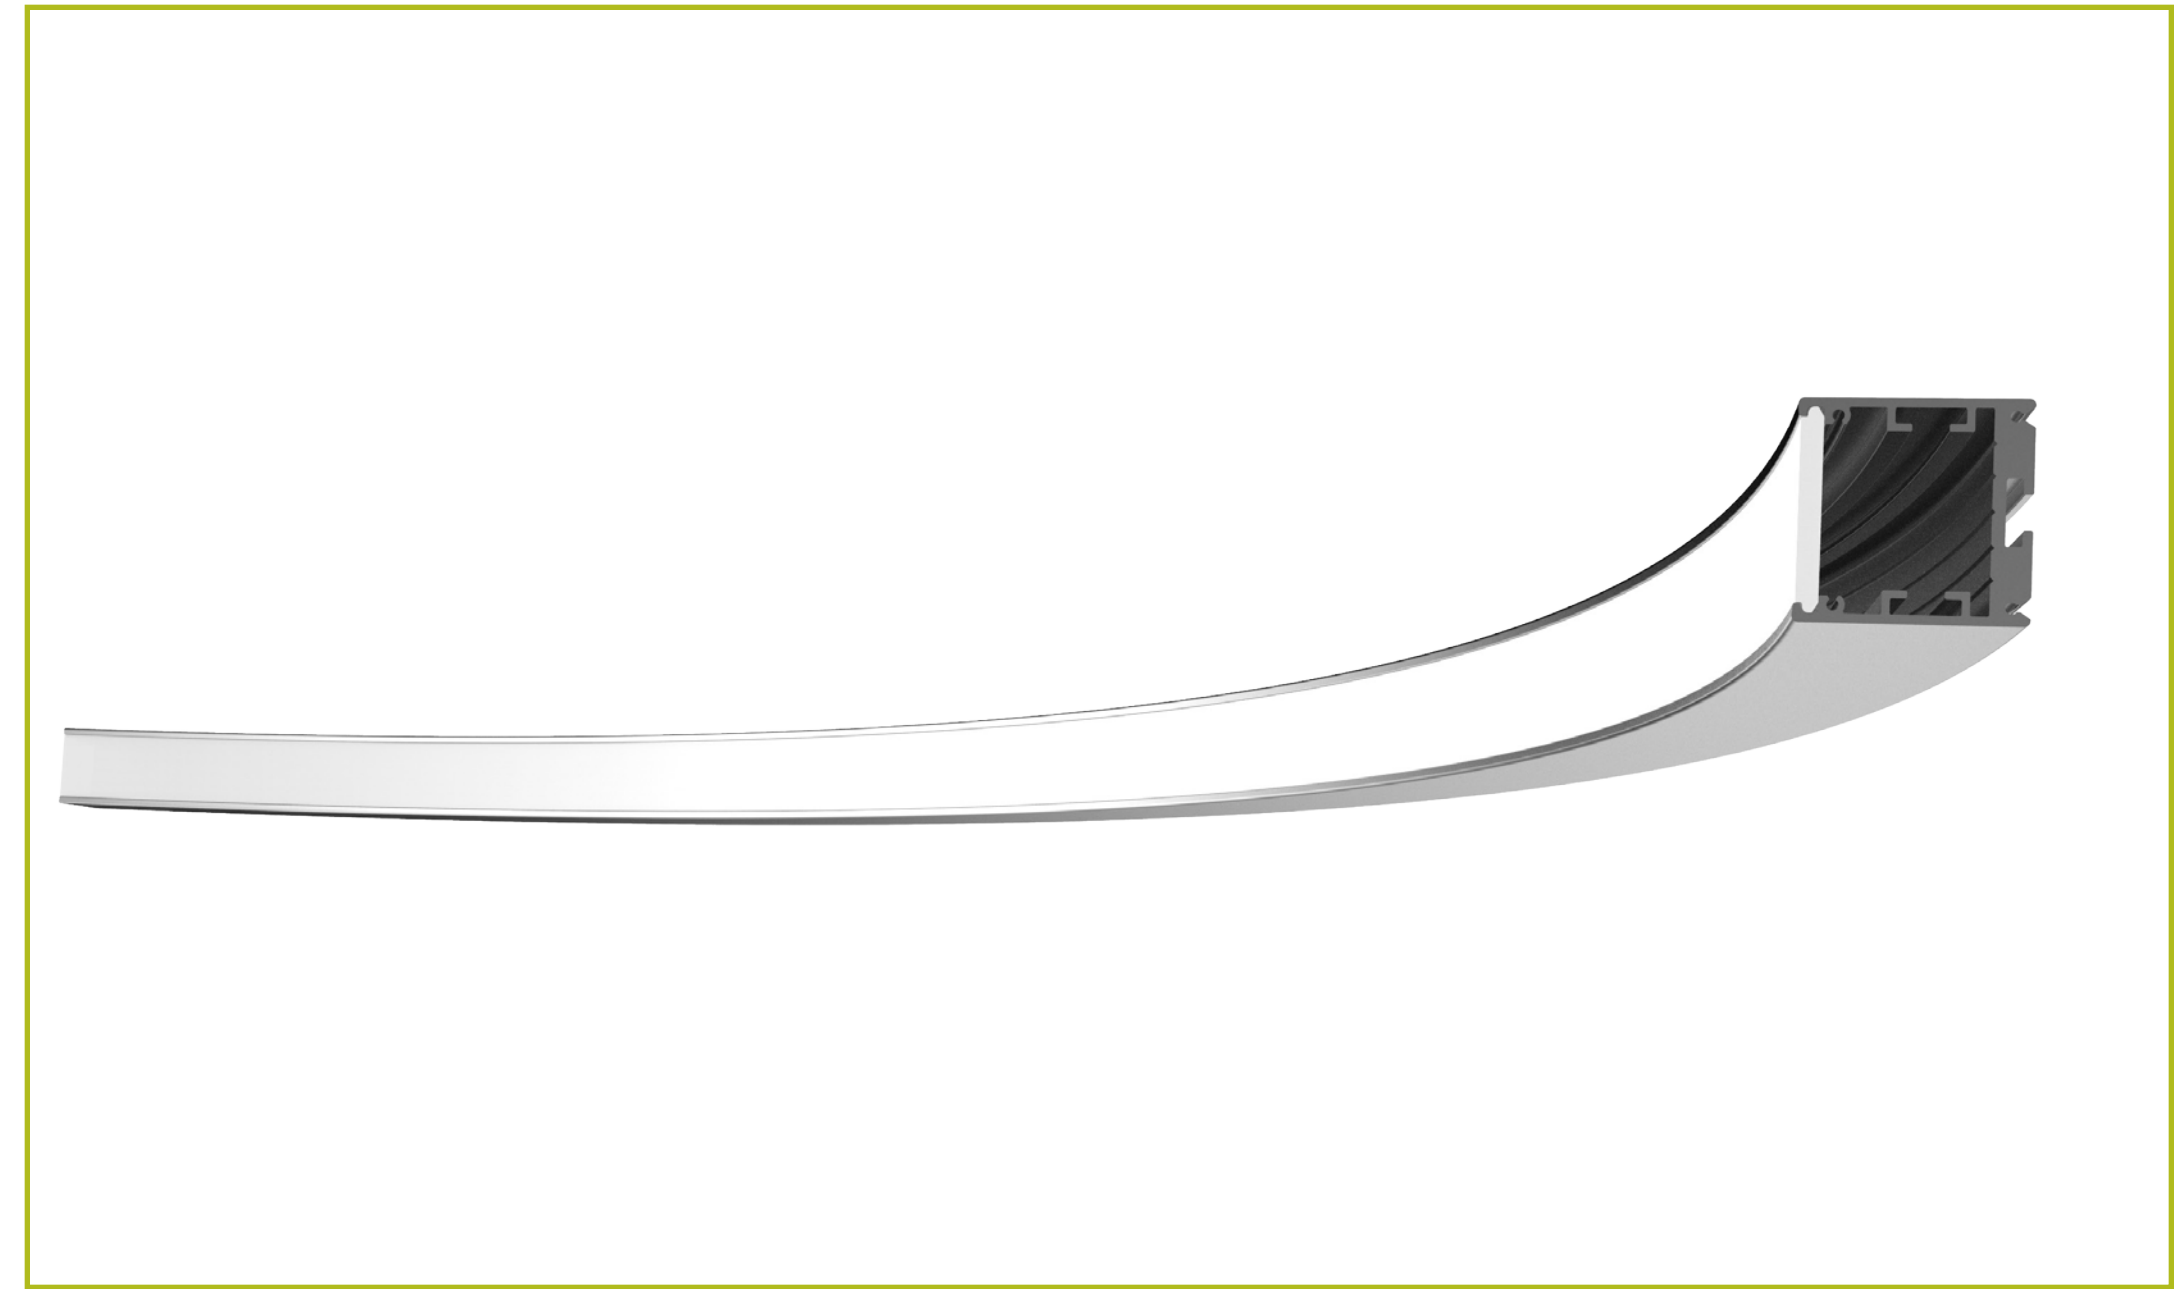

Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

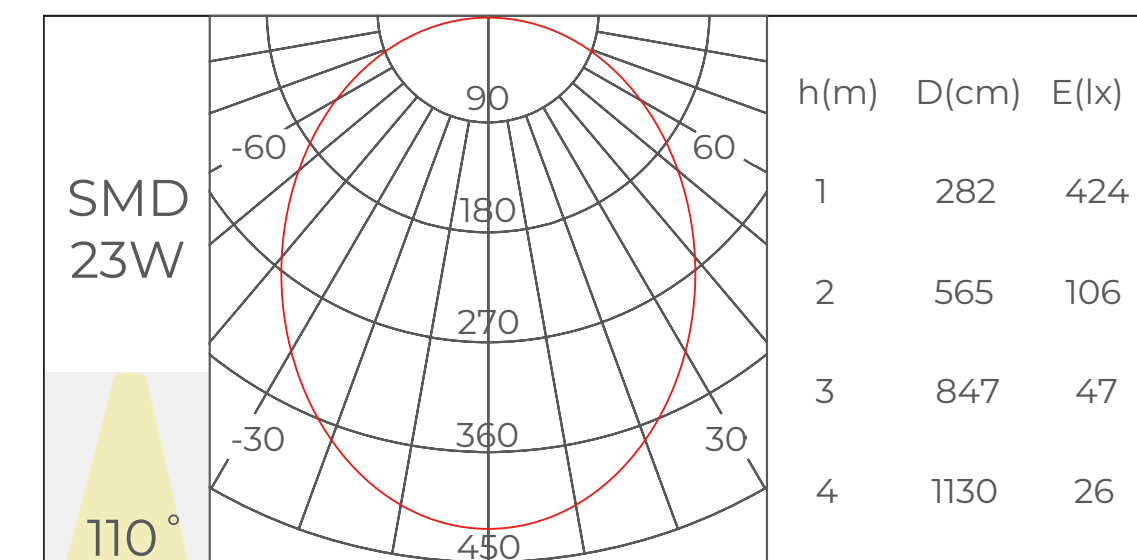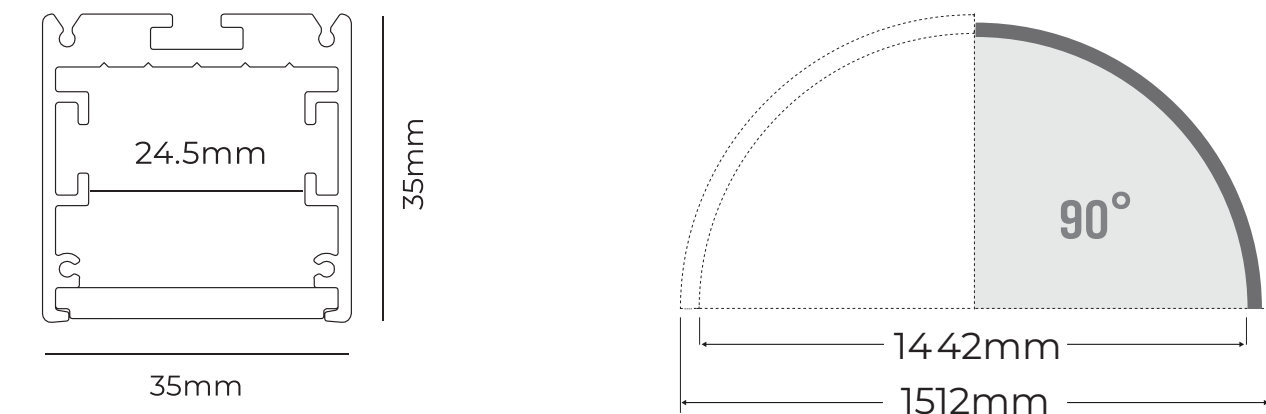

Fantasy 3535-15W90



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Outward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

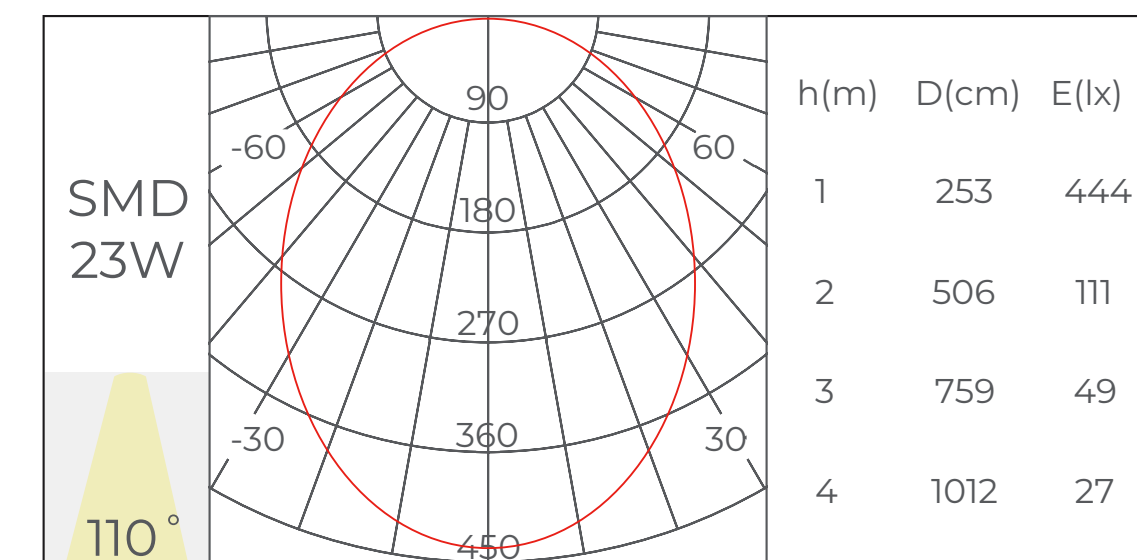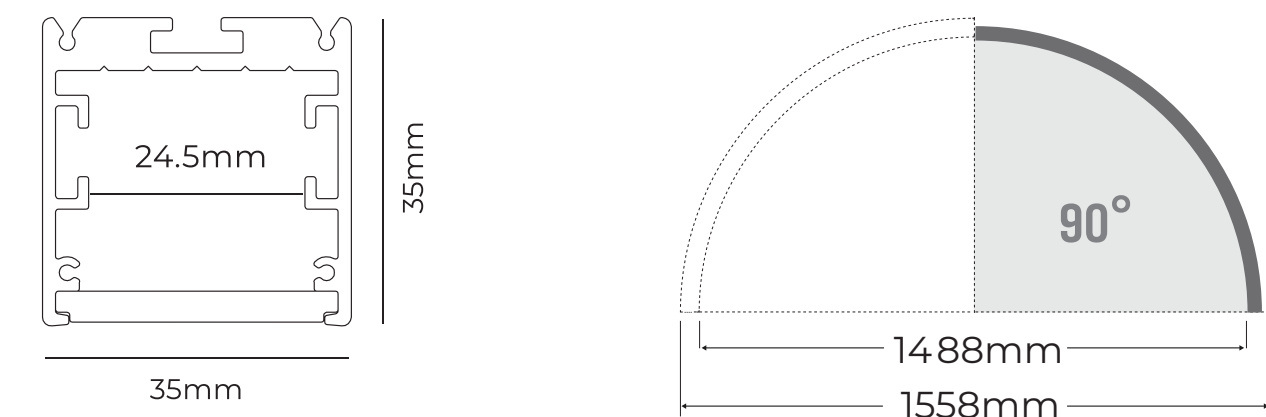

Fantasy 5060 Series

Fantasy 5060-10A45/90




Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Downward & Upward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	11125LM/ pcs	24V	7.5W/pcs	D1000x45°x20x 5.8mm	64LEDs	16LEDs

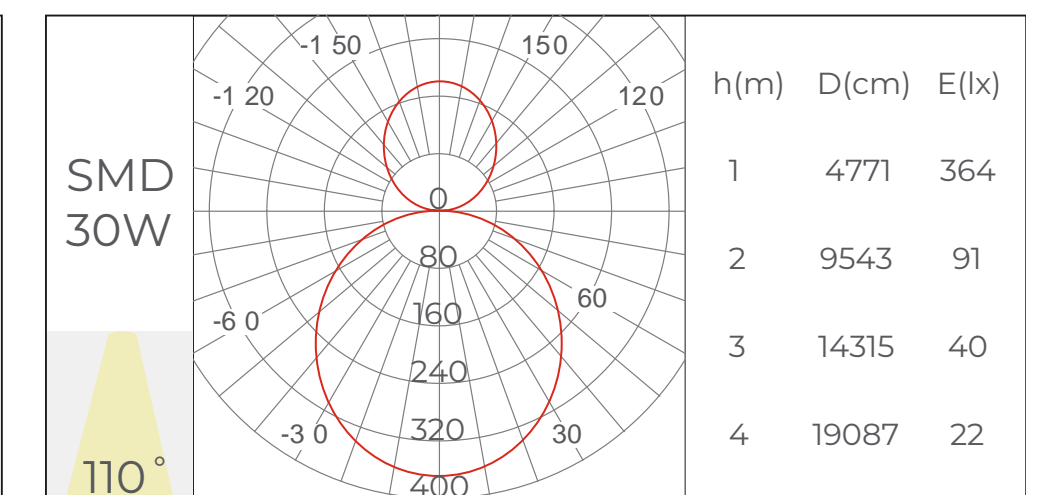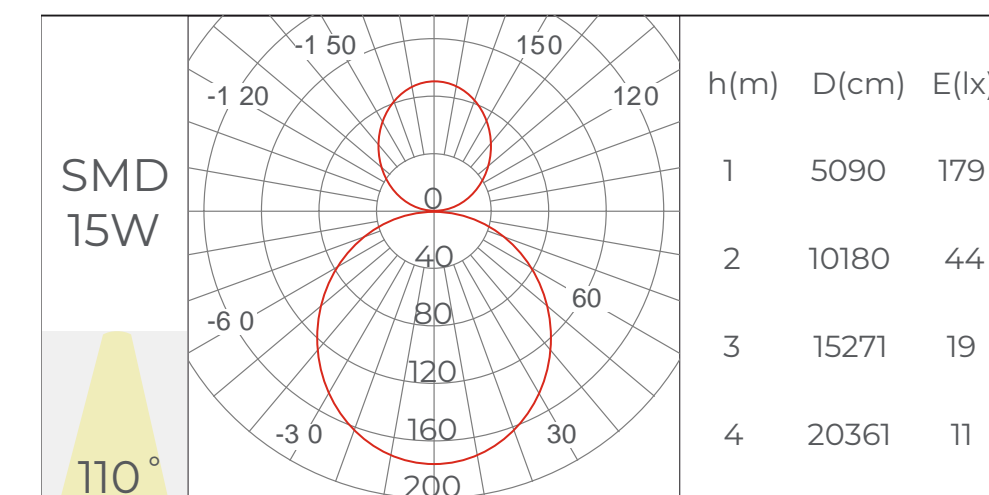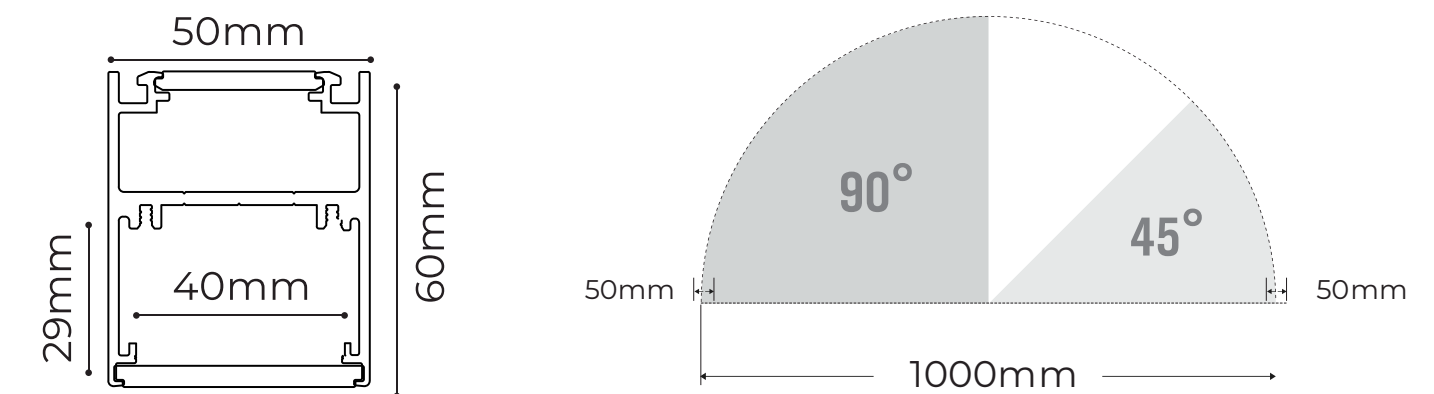

Fantasy 5060-15A45/90




Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Downward & Upward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:


Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	11125LM/ pcs	24V	11.6W/ pcs	D1500x45°x20x 5.8mm	64LEDs	16LEDs

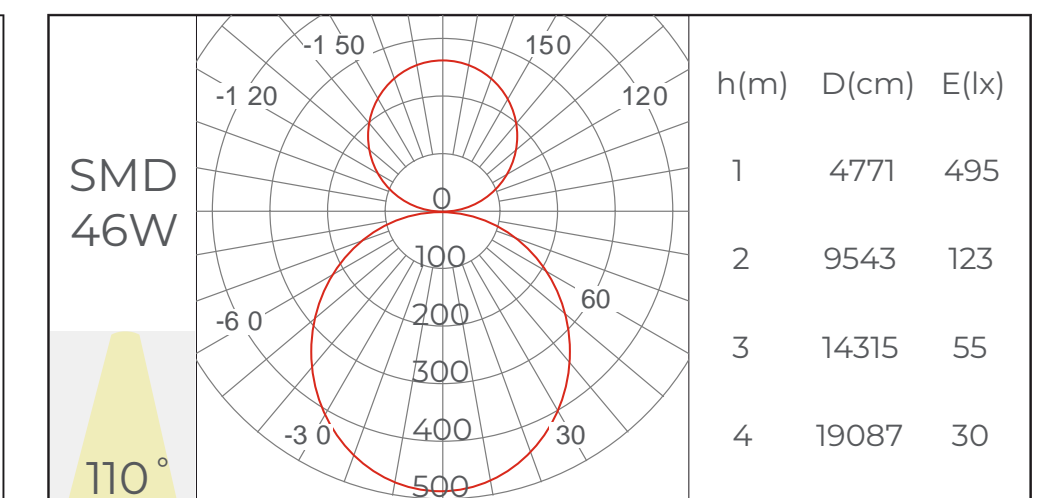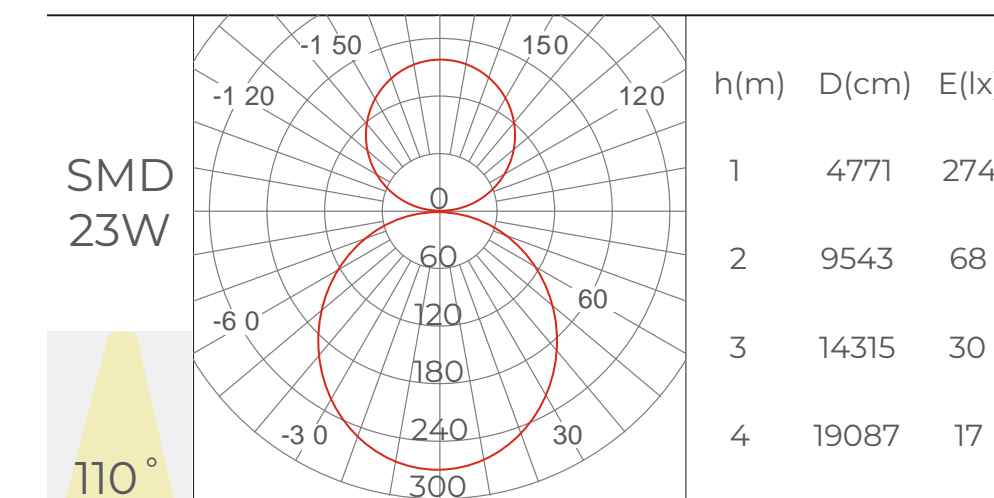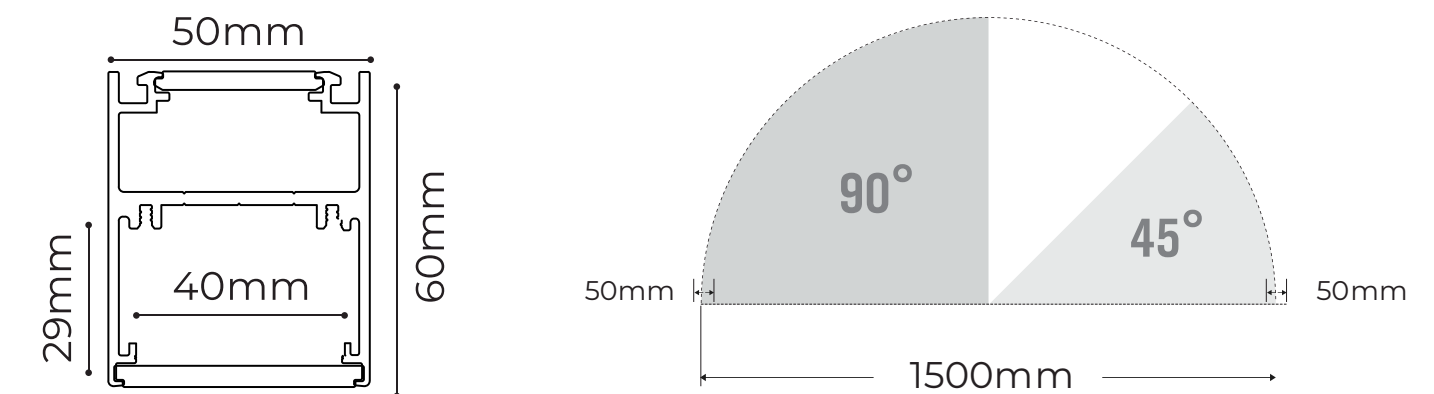

Fantasy 5060-30A45



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Downward & Upward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K

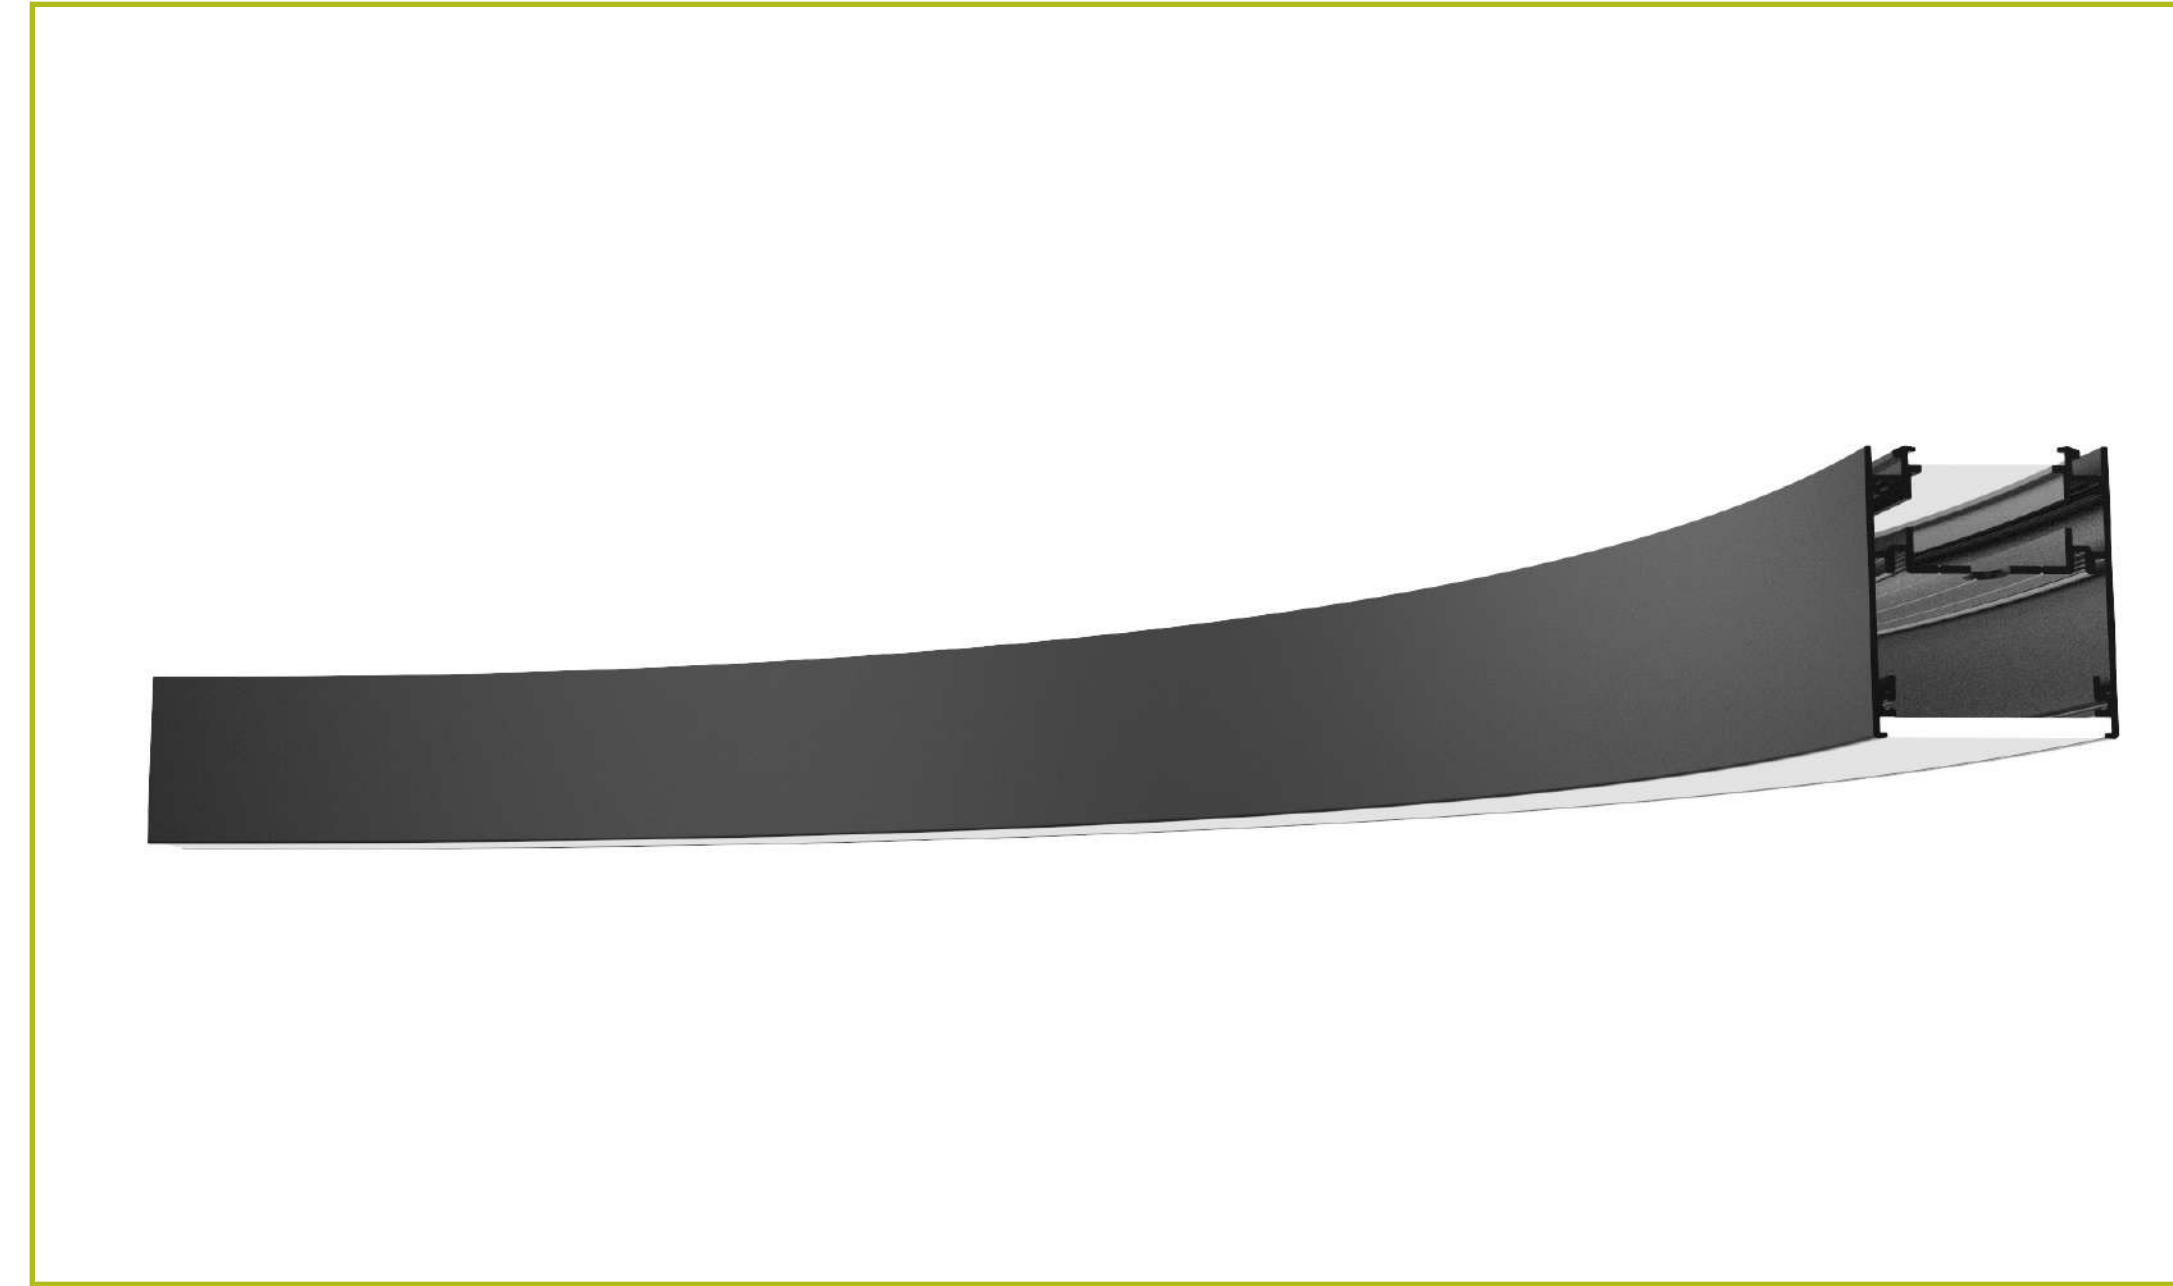

Basic Parameters:


Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DY8160	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D3000x22.5°x 20x5.8mm	96LEDs	16LEDs

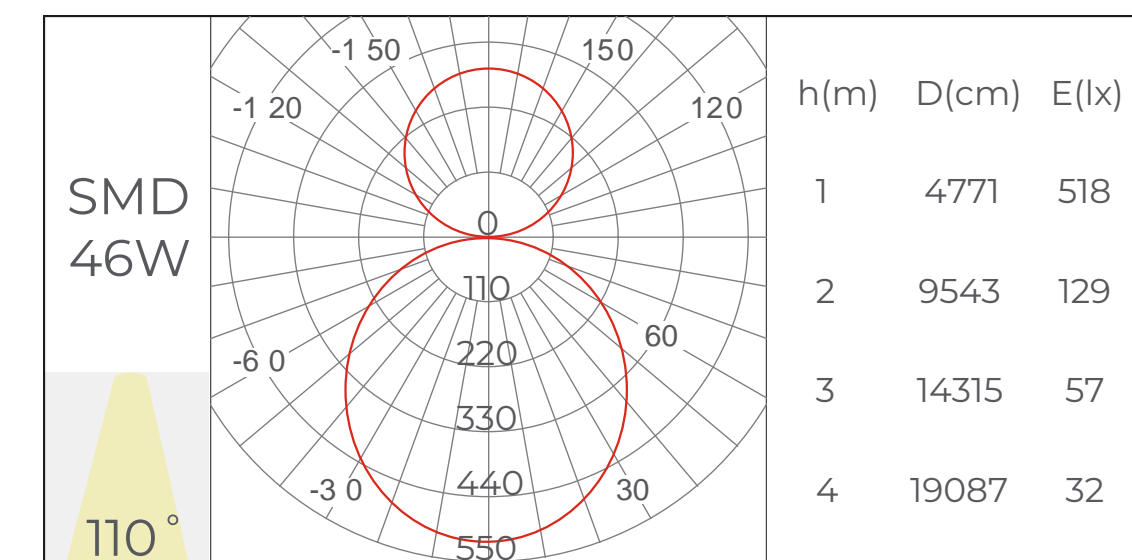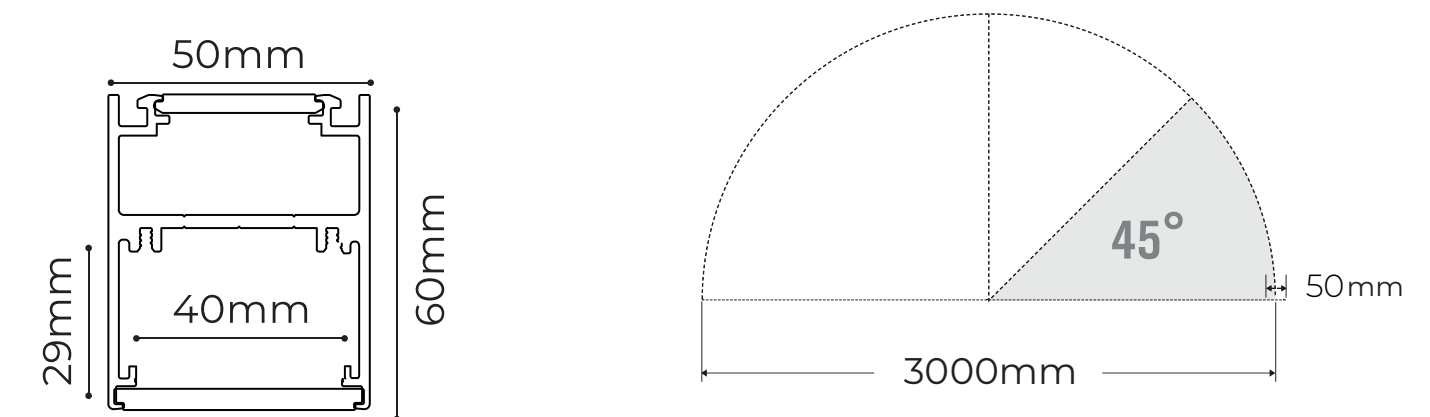

Fantasy 5060-2500



Features & Benefits:

- **Installation:** Pendant, Ceiling
- **Lighting direction:** Downward & Upward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K

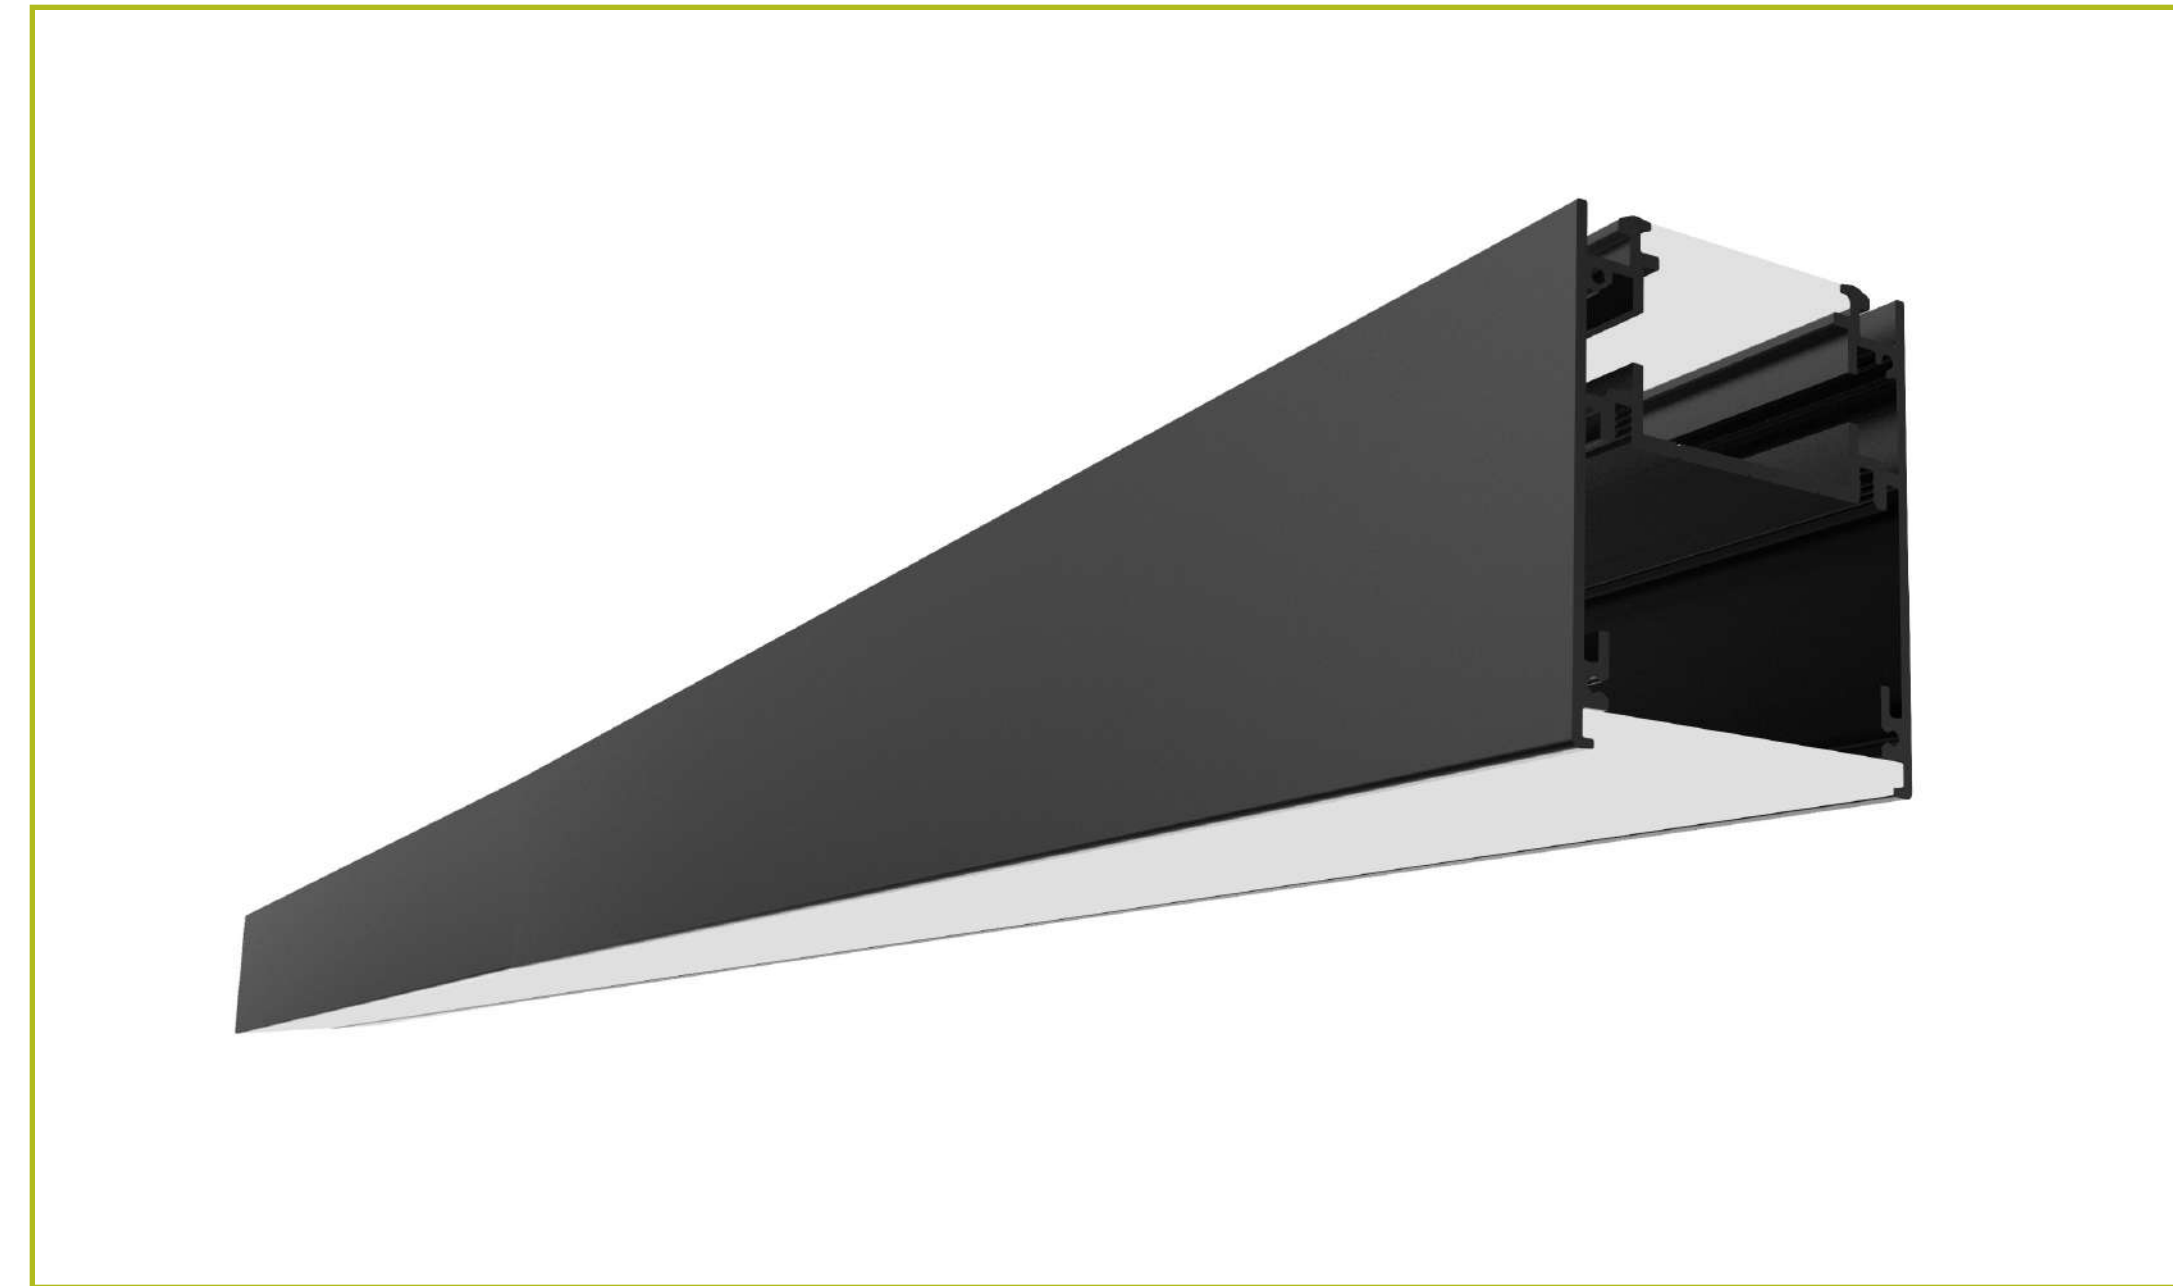

Basic Parameters:


Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs
DY8160	>80 >90	1440LM/ pcs	24V	9.6W/ pcs	499x20x5.8mm	80LEDs	100mm / 16LEDs

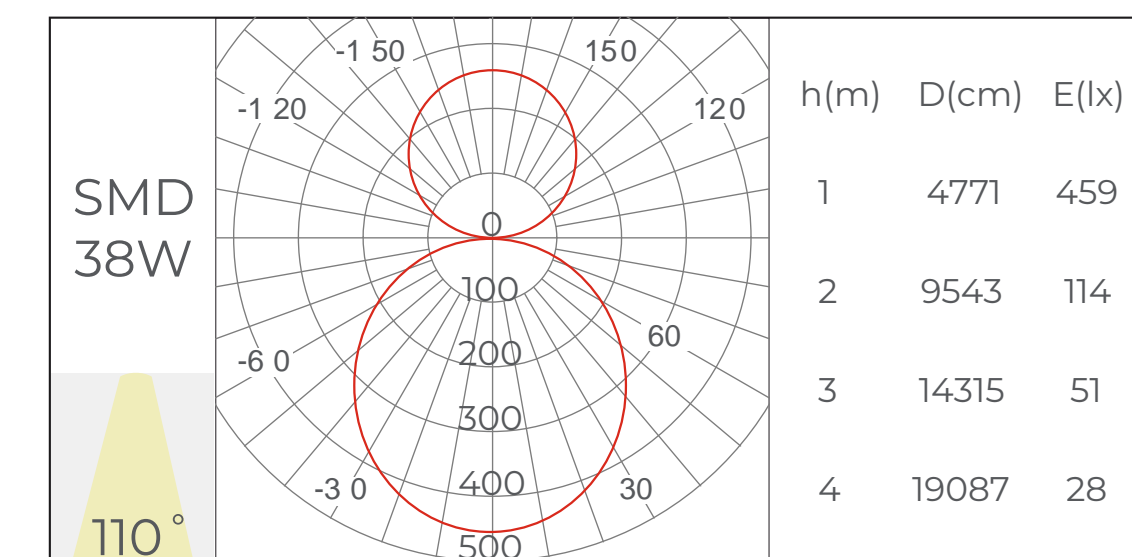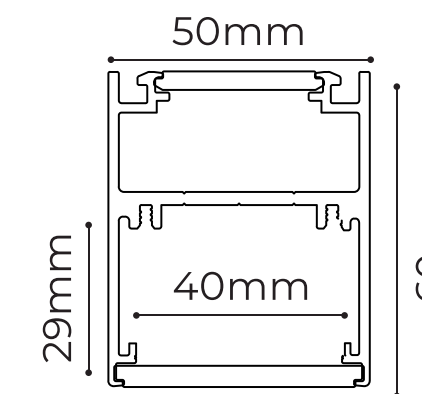

Fantasy 5060-15N90



Features & Benefits:

- **Installation:** Pendant
- **Lighting direction:** Outward & Inward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K

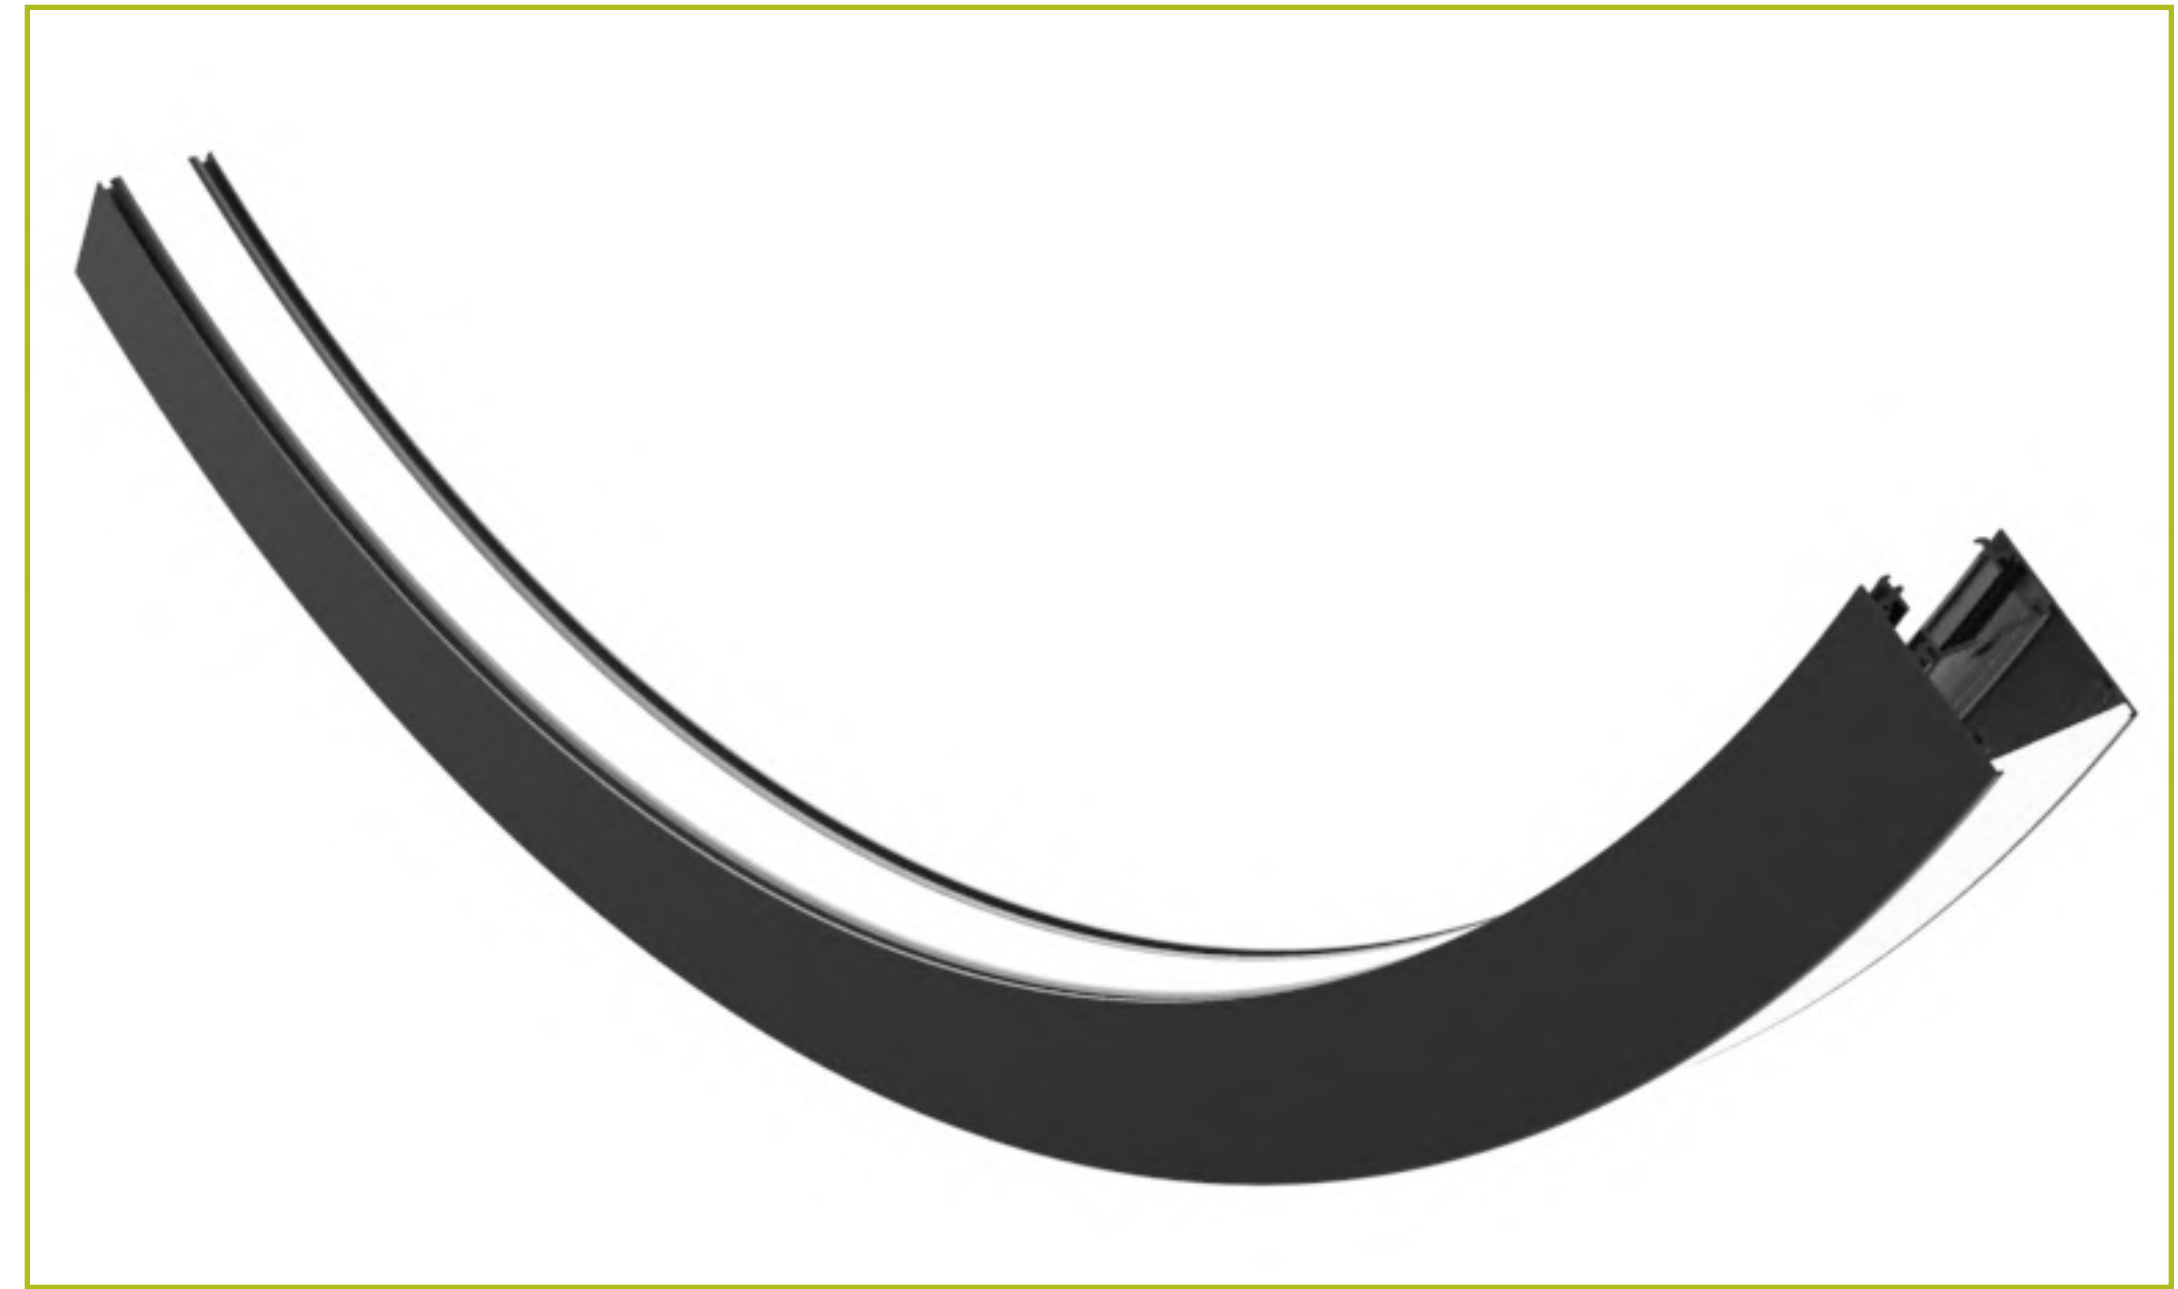

Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

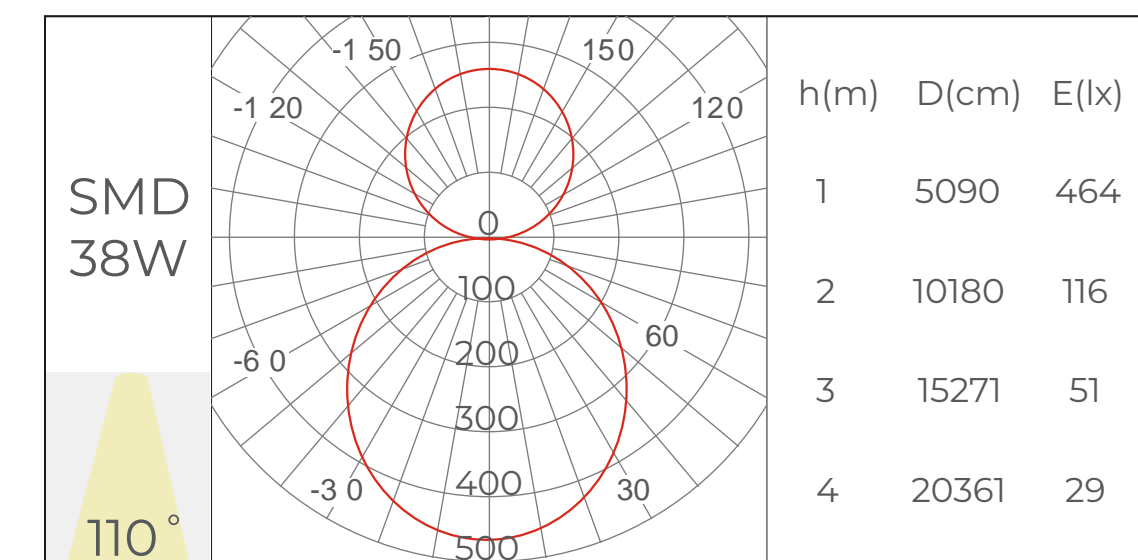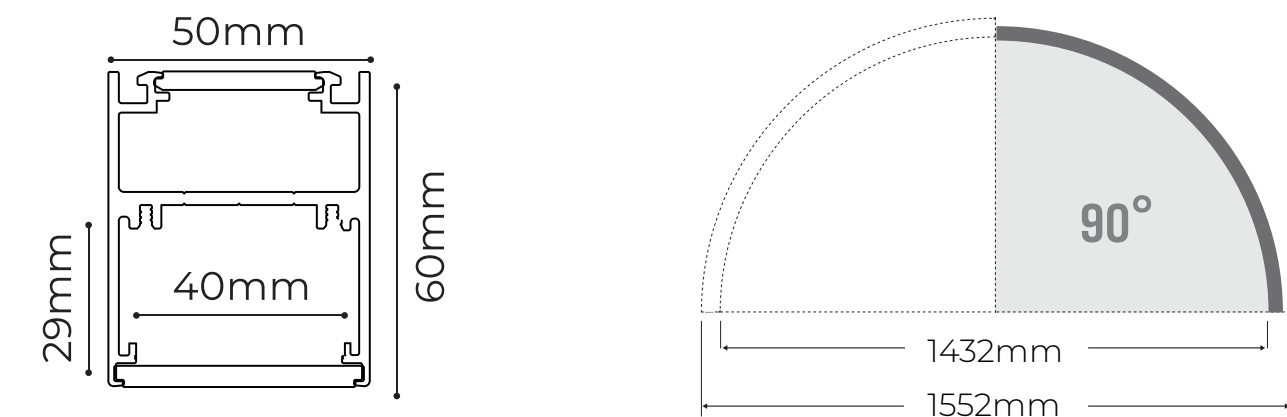

Fantasy 5060-15W90



Features & Benefits:


- **Installation:** Pendant
- **Lighting direction:** Outward & Inward
- **Material:** AL6063-T5, spraying surface
- **Coating:** Silver, Black, White
- **Application:** Indoor
- **IP grade:** IP20
- **Warranty:** 5 years
- **Certification:** Rohs, Reach
- **Color temperature:** 2700K - 6500K



Basic Parameters:

Model	CRI	Lumens	Voltage	Typ. Power	Size	LEDs/pcs	Cutting unit
DS8160	>80 >90	2880LM/ M	24V	19.2W/m	5000x15x1.5mm	160LEDs	50mm / 8LEDs
DMA120	>80	720LM/ M	24V	25W/m	5000x15x1.5mm	120LEDs	50mm / 6LEDs
DA168	>80	815LM/ M	24V	20W/m	4000x15x1.5mm	168LEDs	35.7mm / 6LEDs
DS8320	>80 >90	2880LM/ M	24V	19.2W/m	4000x20x1.5mm	320LEDs	50mm / 8LEDs

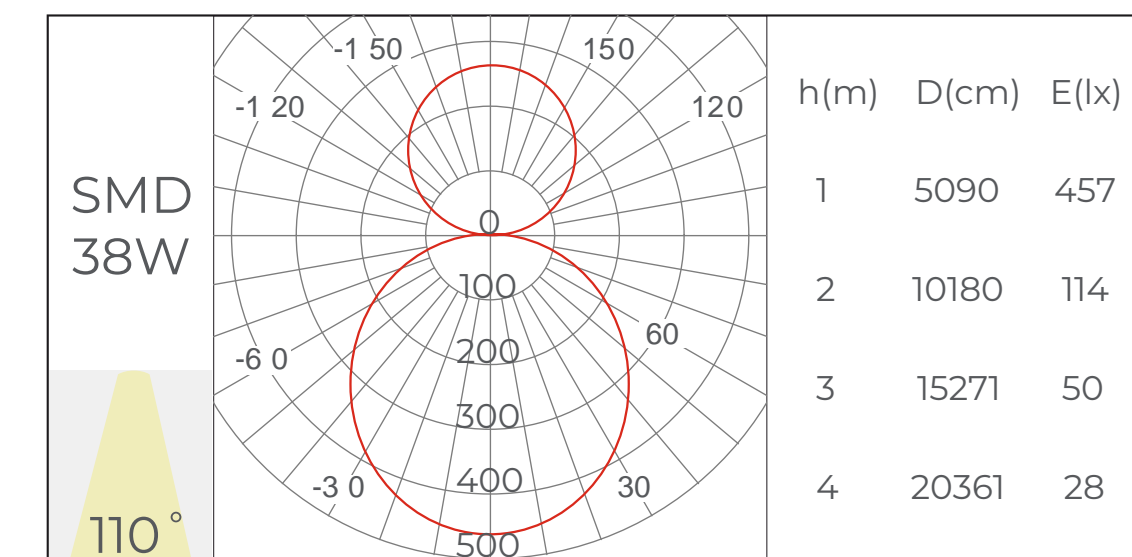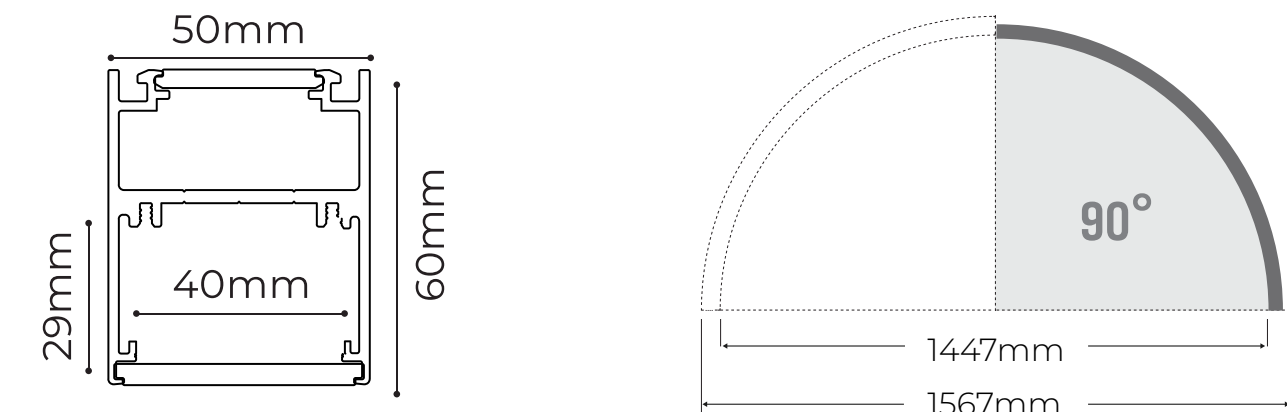

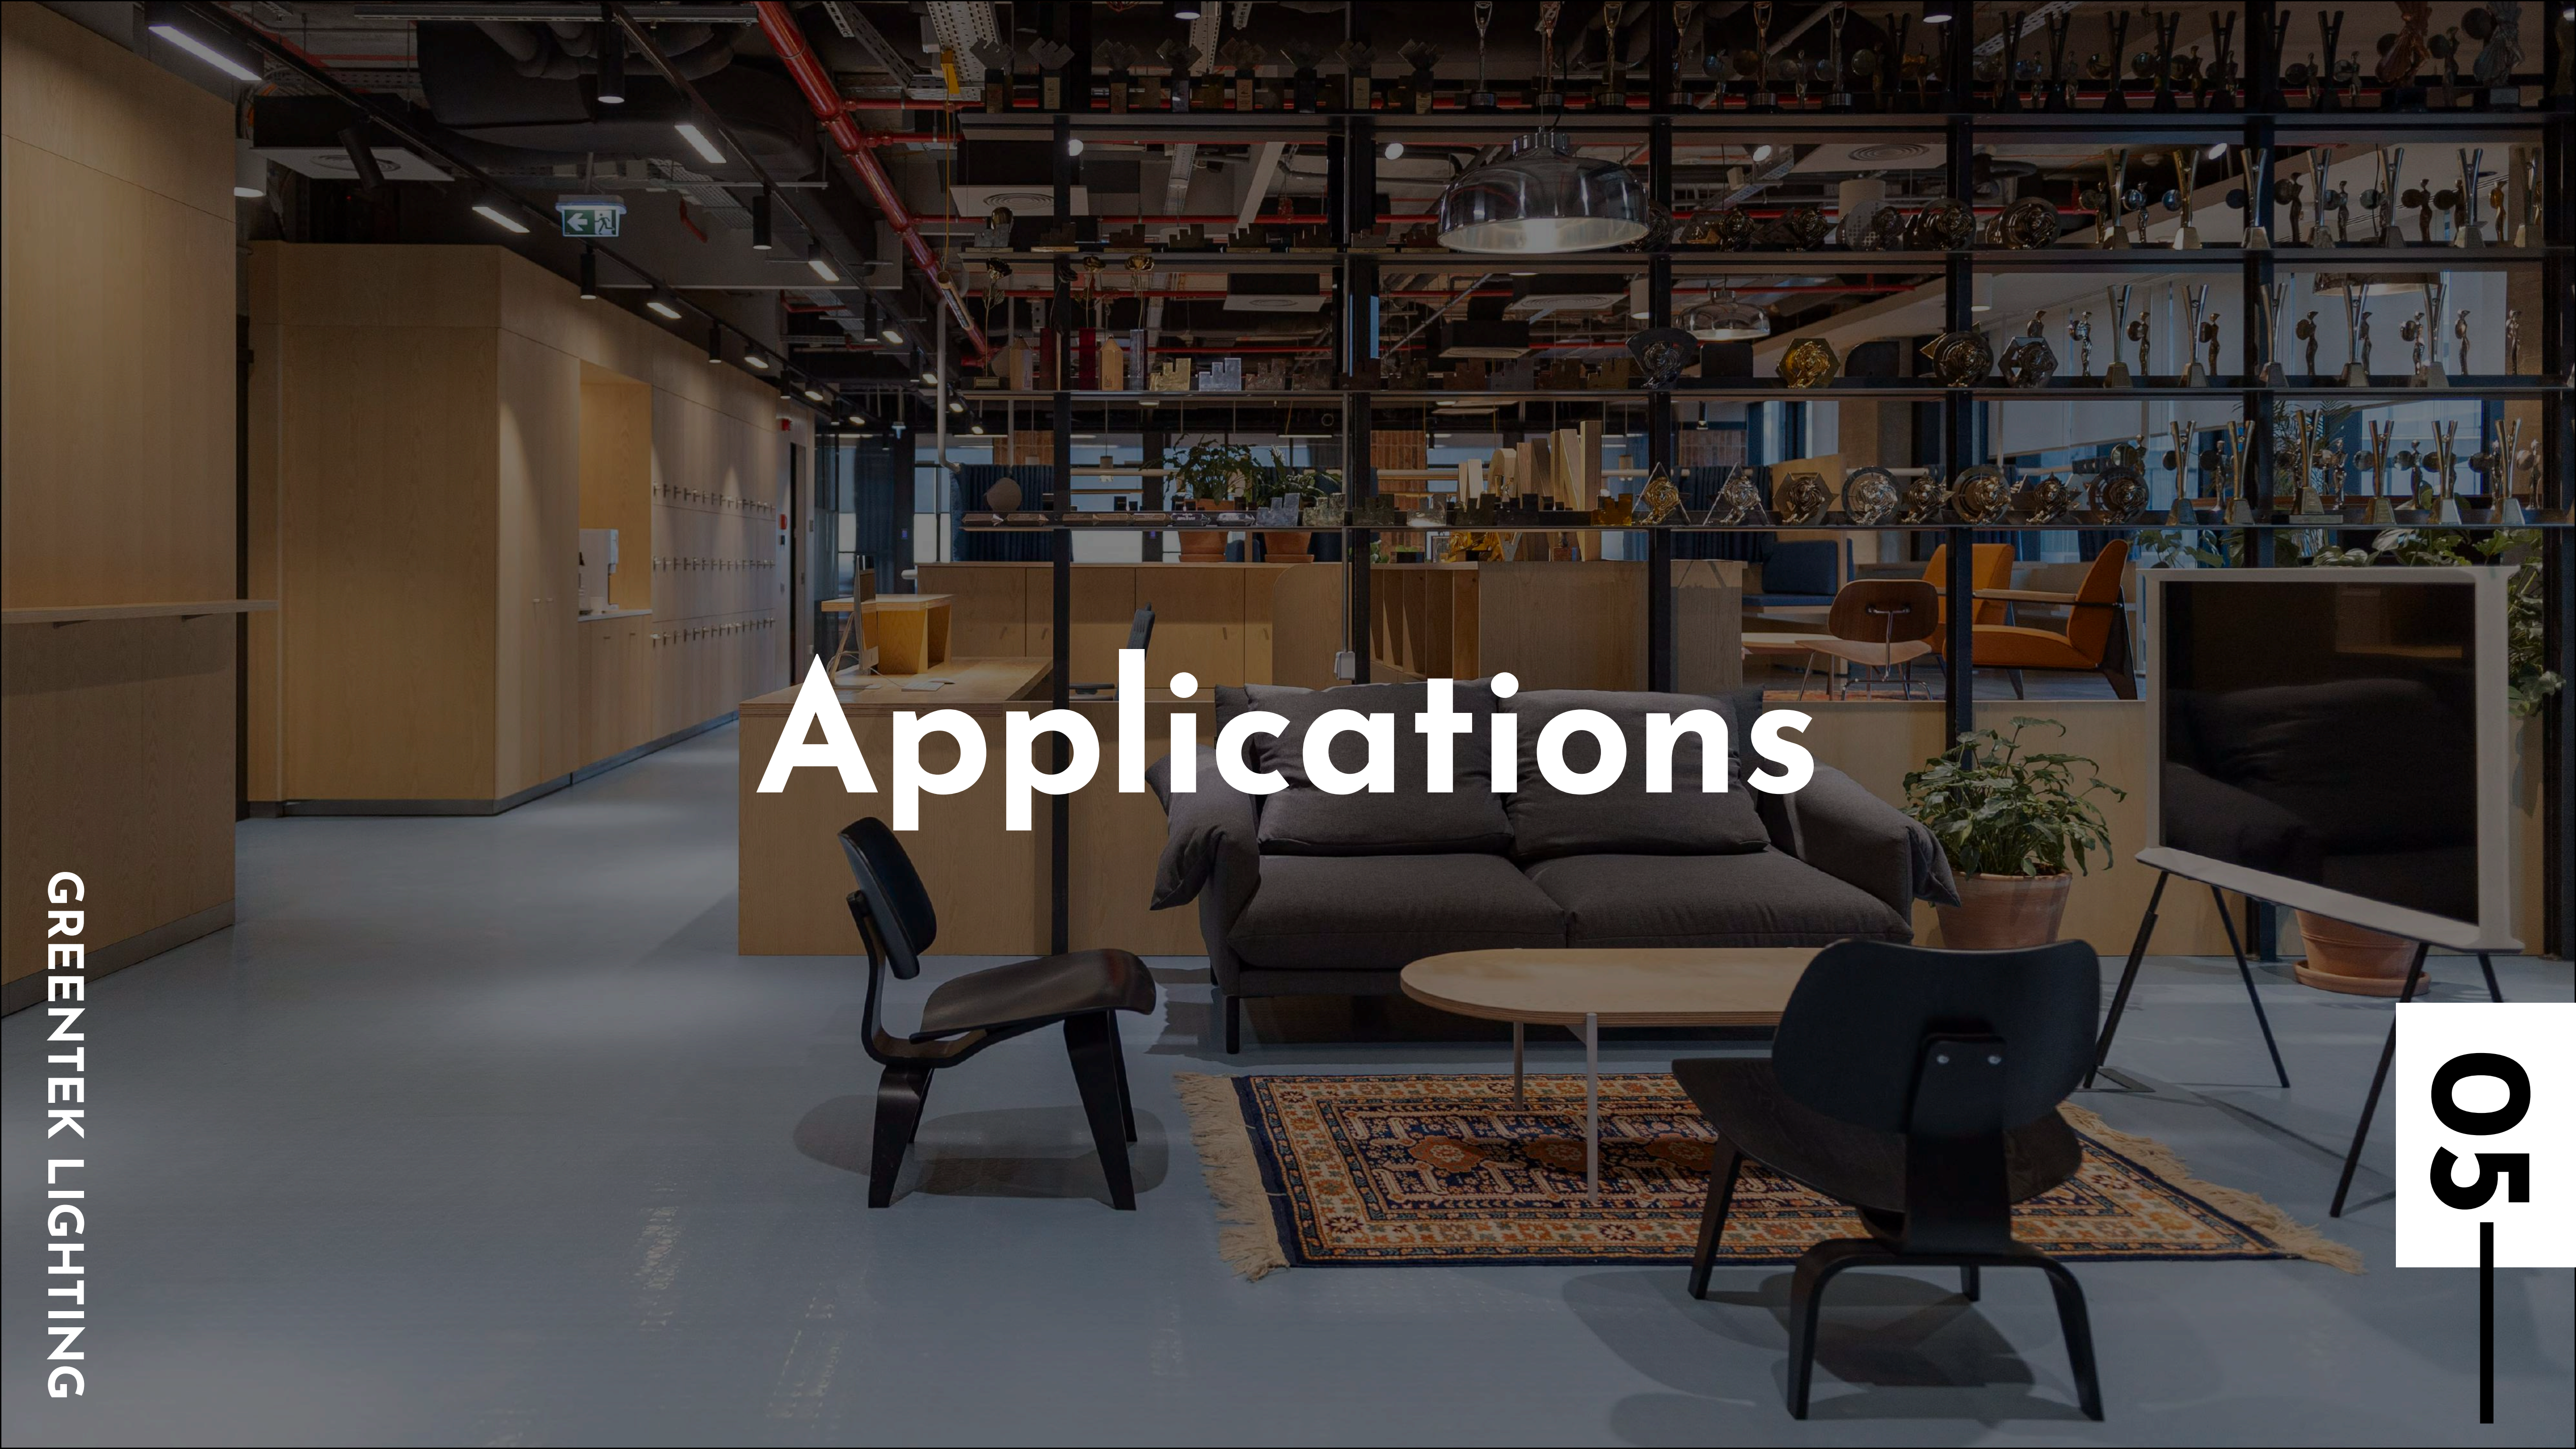

Applications

Modular Design: The luminaire is constructed with a modular design, allowing each piece to seamlessly connect and form a continuous lighting solution. This modular approach provides flexibility in customizing the length and shape of the luminaire to suit various spaces.

Endless Illumination: With an infinite number of pieces, this luminaire offers uninterrupted and continuous illumination. It eliminates any visible breaks or gaps, creating a smooth and cohesive lighting effect that enhances the aesthetics of the environment.



Versatile Configurations: The individual pieces can be easily arranged and combined in different configurations, enabling a wide range of design possibilities. Whether it's a straight line, a curved shape, or a more complex arrangement, the luminaire adapts to meet your desired lighting layout.

Seamless Integration: Each piece seamlessly connects to the next, resulting in a visually pleasing and cohesive lighting installation. This seamless integration ensures a uniform distribution of light without any interruptions or uneven spots, providing a visually striking and balanced lighting experience.



Contact Us



Monday - Friday
09:00 - 18:00



+40 21 230 24 64/65
office@greentek.eu



Grigore Gafencu Street, 14,
014132, 1st District,
Bucharest, Romania

THANK YOU!