



## Tulip M

### SURFACE MOUNTED | PI-LED SERIES

A highly elegant, compact track spotlight. The radiator is encased in the aluminum housing, allowing for a smooth design. As all our track lights, the Tulip M range includes several special color temperatures for food, art and fashion. Especially suitable for commercial spaces and showrooms that require a sleek, minimalistic luminaire.

PI-LED - Combines variable white light and light of the RGB color system in one single light source. It can vary the color temperature between 1.800K - 16.000K along Planckian curve in the course of a day.

The modern touch is given by the aluminum housing and three color options: signal white, jet black and white aluminum.

Available in two series, with different add-ons and controls:


- Tulip M Non-DALI – the standard for any project in the retail sector
- Tulip M DALI – with DALI controls for illumination adjustments
- Tulip M PI-LED – *simulates the spectral quality of natural daylight over the entire day.*

### APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Hospitality | Art & Exhibitions

### FEATURES & BENEFITS

- CRI > 90 as standard
- Great variety of optics – 3 angles, from narrow beams to flood beams, for each housing size
- Efficiency: 54 lm/W
- Very long service life: 50.000 h at 90% luminous flux
- Dimmable

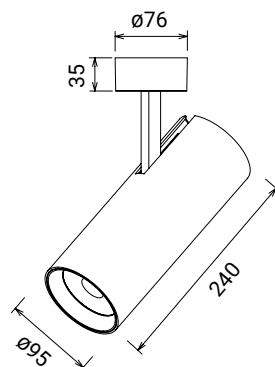


**SPECIFICATIONS**

|                                |   |
|--------------------------------|---|
| Power consumption              | 26W   |
| Dimensions                     | Ø95x240x285mm±1mm   |
| Weight                         | 1.7 kg  |
| Housing materials              | Aluminium, Glass  |
| IK code                        | IK02  |
| THD (at 230V, 50Hz, Full load) | < 8%  |
| Protection class               | Safety class 1  |
| Operating temperature [°C]     | +10°C ... +45°C / +50F ... +113F  |
| Operating humidity [%]         | 10 ÷ 85   |
| Power factor                   | ≥0.85   |
| AC Input [Vac]                 | 220 - 240 VAC   |
| Lens angle [°]                 | 15°, 30°, 45°   |
| Lifespan [h]                   | 50.000  |
| Housing color                  | ○ RAL 9003 - Signal white, ● RAL 9005 - Jet Black, ● RAL 9006 - White Aluminium |
| Lumen maintenance              | L70/B10@50.000h at 25°C   |
| IP factor                      | IP20  |
| Control optional               | DALI  |
| Warranty [years]               | 5   |
| Storage temperature range [°C] | -20°C ... +80°C / -4F ... +176F   |
| Emergency option               | -   |

|         |          |
|---------|----------|
| #       | Standard |
| CRI     | CRI90    |
| CCT [K] | PI       |
| MacAdam | 1        |

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

**LIGHT DISTRIBUTION**

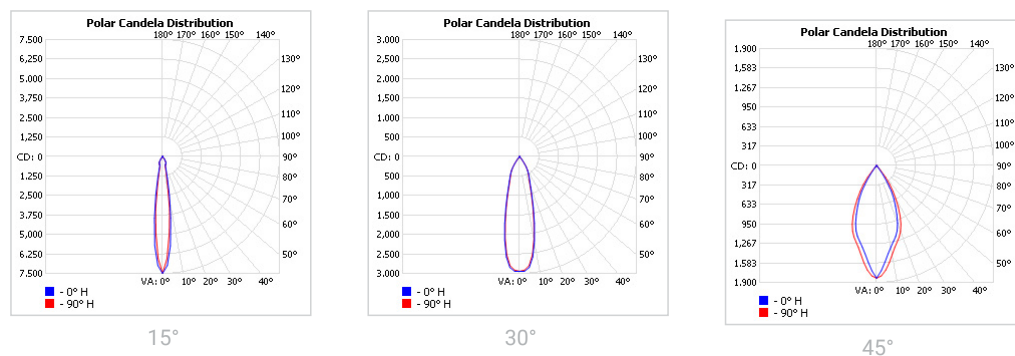

**TOLERANCES**

---

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

**BATTERY WARRANTY**

---

**Non-DALI EM & DALI EM:** 12 months warranty

**Non-DALI & DALI:** -

## SKU SPECIFICATIONS

| Product Code                           | Dimensions (mm)   | CCT (K) | Lumens (lm) | Power (W) | Eff. (lm/watt) | Lens Angle (°) |
|--|-------------------|---------|-------------|-----------|----------------|----------------|
| <b>CRI 90</b>                          |                   |         |             |           |                |                |
| 2G1503 TulipM SM C34016R/PI/26W/90/A15 | Ø95x240x285mm±1mm | PI      | 1400        | 26W       | 54             | 15°            |
| 2G1504 TulipM SM C34016R/PI/26W/90/A30 | Ø95x240x285mm±1mm | PI      | 1400        | 26W       | 54             | 30°            |
| 2G1505 TulipM SM C34016R/PI/26W/90/A45 | Ø95x240x285mm±1mm | PI      | 1400        | 26W       | 54             | 45°            |