



Artus TRK

TRACK LINEAR | NON-DALI SERIES

Modern track mounted luminaire consisting of continuous optic line. Offers unique ambiance in office spaces, meeting rooms and building entrances. Special wide-beam angles perfectly spread the light across the ceiling. Sleek aluminum housing incorporates the future-oriented technology and efficient LED lighting quality.

Track mounted enables the ultimate ceiling mounting design. The track and the track adaptor are available in two colors: black and gray, suitable for any environment.

Artus TRK has several series, determined by various add-on and controls:


- Artus TRK Non-DALI the standard for office spaces
- Artus TRK DALI: with DALI dimming

FEATURES & BENEFITS

- CRI 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency: 122 lm/w @4000K
- Dimmable (only for DALI Series)

APPLICATION

Office | Healthcare | Hospitality | DIY

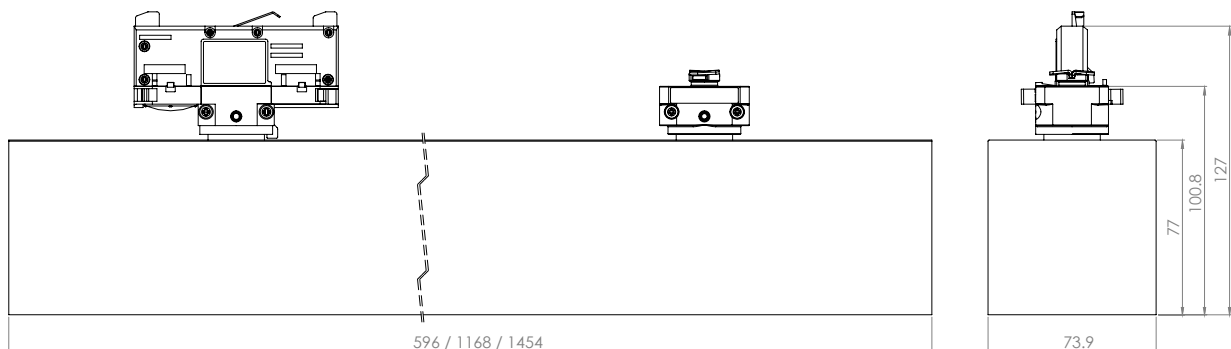


SPECIFICATIONS

Power consumption	8W, 15W	15W, 25W, 32W, 38W, 50W	23W, 33W, 37W, 50W, 60W
Dimensions	596 x 100.8 x 73.9 ± 1mm	1168 x 100.8 x 73.9 ± 1mm	1454 x 100.8 x 73.9 ± 1mm
Weight	1.6 Kg	2.9 Kg	3.5 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<8%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	110°		
Lifespan [h]	50,000		
Housing color	● Anodised grey ● Anodised black		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	-		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION



TOLERANCES**Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power [W]	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
<50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
<80W	DALI	27	21	13	45	35	21

RISK GROUP**Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
162048 Artus 60TRK/3000/8W/80	596 x 100.8 x 73.9 ± 1mm	3000	760	8W	95	110°
162049 Artus 60TRK/4000/8W/80	596 x 100.8 x 73.9 ± 1mm	4000	795	8W	100	110°
162050 Artus 60TRK/5000/8W/80	596 x 100.8 x 73.9 ± 1mm	5000	815	8W	102	110°
162051 Artus 60TRK/6500/8W/80	596 x 100.8 x 73.9 ± 1mm	6500	795	8W	100	110°
162052 Artus 60TRK/3000/15W/80	596 x 100.8 x 73.9 ± 1mm	3000	1305	15W	87	110°
162053 Artus 60TRK/4000/15W/80	596 x 100.8 x 73.9 ± 1mm	4000	1360	15W	91	110°
162054 Artus 60TRK/5000/15W/80	596 x 100.8 x 73.9 ± 1mm	5000	1400	15W	94	110°
162055 Artus 60TRK/6500/15W/80	596 x 100.8 x 73.9 ± 1mm	6500	1360	15W	91	110°
162056 Artus 120TRK/3000/15W/80	1168 x 100.8 x 73.9 ± 1mm	3000	1660	15W	111	110°
162057 Artus 120TRK/4000/15W/80	1168 x 100.8 x 73.9 ± 1mm	4000	1730	15W	116	110°
162058 Artus 120TRK/5000/15W/80	1168 x 100.8 x 73.9 ± 1mm	5000	1775	15W	119	110°
162059 Artus 120TRK/6500/15W/80	1168 x 100.8 x 73.9 ± 1mm	6500	1730	15W	116	110°
162060 Artus 120TRK/3000/25W/80	1168 x 100.8 x 73.9 ± 1mm	3000	2745	25W	110	110°
162061 Artus 120TRK/4000/25W/80	1168 x 100.8 x 73.9 ± 1mm	4000	2860	25W	115	110°
162062 Artus 120TRK/5000/25W/80	1168 x 100.8 x 73.9 ± 1mm	5000	2940	25W	118	110°
162063 Artus 120TRK/6500/25W/80	1168 x 100.8 x 73.9 ± 1mm	6500	2860	25W	115	110°
162064 Artus 120TRK/3000/32W/80	1168 x 100.8 x 73.9 ± 1mm	3000	3505	32W	110	110°
162065 Artus 120TRK/4000/32W/80	1168 x 100.8 x 73.9 ± 1mm	4000	3655	32W	115	110°
162066 Artus 120TRK/5000/32W/80	1168 x 100.8 x 73.9 ± 1mm	5000	3750	32W	118	110°
162067 Artus 120TRK/6500/32W/80	1168 x 100.8 x 73.9 ± 1mm	6500	3655	32W	115	110°
162068 Artus 120TRK/3000/38W/80	1168 x 100.8 x 73.9 ± 1mm	3000	4135	38W	109	110°
162069 Artus 120TRK/4000/38W/80	1168 x 100.8 x 73.9 ± 1mm	4000	4310	38W	114	110°
162070 Artus 120TRK/5000/38W/80	1168 x 100.8 x 73.9 ± 1mm	5000	4425	38W	117	110°
162071 Artus 120TRK/6500/38W/80	1168 x 100.8 x 73.9 ± 1mm	6500	4310	38W	114	110°
162072 Artus 120TRK/3000/50W/80	1168 x 100.8 x 73.9 ± 1mm	3000	5065	50W	102	110°
162073 Artus 120TRK/4000/50W/80	1168 x 100.8 x 73.9 ± 1mm	4000	5280	50W	106	110°
162074 Artus 120TRK/5000/50W/80	1168 x 100.8 x 73.9 ± 1mm	5000	5425	50W	109	110°
162075 Artus 120TRK/6500/50W/80	1168 x 100.8 x 73.9 ± 1mm	6500	5280	50W	106	110°
162076 Artus 150TRK/3000/23W/80	1454 x 100.8 x 73.9 ± 1mm	3000	2660	23W	116	110°
162077 Artus 150TRK/4000/23W/80	1454 x 100.8 x 73.9 ± 1mm	4000	2775	23W	121	110°
162078 Artus 150TRK/5000/23W/80	1454 x 100.8 x 73.9 ± 1mm	5000	2850	23W	124	110°
162079 Artus 150TRK/6500/23W/80	1454 x 100.8 x 73.9 ± 1mm	6500	2775	23W	121	110°
162080 Artus 150TRK/3000/33W/80	1454 x 100.8 x 73.9 ± 1mm	3000	3860	33W	117	110°
162081 Artus 150TRK/4000/33W/80	1454 x 100.8 x 73.9 ± 1mm	4000	4025	33W	122	110°
162082 Artus 150TRK/5000/33W/80	1454 x 100.8 x 73.9 ± 1mm	5000	4130	33W	126	110°
162083 Artus 150TRK/6500/33W/80	1454 x 100.8 x 73.9 ± 1mm	6500	4025	33W	122	110°
162084 Artus 150TRK/3000/37W/80	1454 x 100.8 x 73.9 ± 1mm	3000	4150	37W	113	110°
162085 Artus 150TRK/4000/37W/80	1454 x 100.8 x 73.9 ± 1mm	4000	4325	37W	117	110°
162086 Artus 150TRK/5000/37W/80	1454 x 100.8 x 73.9 ± 1mm	5000	4440	37W	120	110°
162087 Artus 150TRK/6500/37W/80	1454 x 100.8 x 73.9 ± 1mm	6500	4325	37W	117	110°
162088 Artus 150TRK/3000/50W/80	1454 x 100.8 x 73.9 ± 1mm	3000	5140	50W	103	110°
162089 Artus 150TRK/4000/50W/80	1454 x 100.8 x 73.9 ± 1mm	4000	5355	50W	108	110°
162090 Artus 150TRK/5000/50W/80	1454 x 100.8 x 73.9 ± 1mm	5000	5500	50W	110	110°
162091 Artus 150TRK/6500/50W/80	1454 x 100.8 x 73.9 ± 1mm	6500	5355	50W	108	110°
162092 Artus 150TRK/3000/60W/80	1454 x 100.8 x 73.9 ± 1mm	3000	6260	60W	105	110°
162093 Artus 150TRK/4000/60W/80	1454 x 100.8 x 73.9 ± 1mm	4000	6525	60W	109	110°
162094 Artus 150TRK/5000/60W/80	1454 x 100.8 x 73.9 ± 1mm	5000	6700	60W	112	110°
162095 Artus 150TRK/6500/60W/80	1454 x 100.8 x 73.9 ± 1mm	6500	6525	60W	109	110°
162048 Artus 60TRK/3000/8W/80/B	596 x 100.8 x 73.9 ± 1mm	3000	760	8W	95	110°
162049 Artus 60TRK/4000/8W/80/B	596 x 100.8 x 73.9 ± 1mm	4000	795	8W	100	110°
162050 Artus 60TRK/5000/8W/80/B	596 x 100.8 x 73.9 ± 1mm	5000	815	8W	102	110°
162051 Artus 60TRK/6500/8W/80/B	596 x 100.8 x 73.9 ± 1mm	6500	795	8W	100	110°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
162052 Artus 60TRK/3000/15W/80/B	596 x 100.8 x 73.9 ± 1mm	3000	1305	15W	87	110°
162053 Artus 60TRK/4000/15W/80/B	596 x 100.8 x 73.9 ± 1mm	4000	1360	15W	91	110°
162054 Artus 60TRK/5000/15W/80/B	596 x 100.8 x 73.9 ± 1mm	5000	1400	15W	94	110°
162055 Artus 60TRK/6500/15W/80/B	596 x 100.8 x 73.9 ± 1mm	6500	1360	15W	91	110°
162056 Artus 120TRK/3000/15W/80/B	1168 x 100.8 x 73.9 ± 1mm	3000	1660	15W	111	110°
162057 Artus 120TRK/4000/15W/80/B	1168 x 100.8 x 73.9 ± 1mm	4000	1730	15W	116	110°
162058 Artus 120TRK/5000/15W/80/B	1168 x 100.8 x 73.9 ± 1mm	5000	1775	15W	119	110°
162059 Artus 120TRK/6500/15W/80/B	1168 x 100.8 x 73.9 ± 1mm	6500	1730	15W	116	110°
162060 Artus 120TRK/3000/25W/80/B	1168 x 100.8 x 73.9 ± 1mm	3000	2745	25W	110	110°
162061 Artus 120TRK/4000/25W/80/B	1168 x 100.8 x 73.9 ± 1mm	4000	2860	25W	115	110°
162062 Artus 120TRK/5000/25W/80/B	1168 x 100.8 x 73.9 ± 1mm	5000	2940	25W	118	110°
162063 Artus 120TRK/6500/25W/80/B	1168 x 100.8 x 73.9 ± 1mm	6500	2860	25W	115	110°
162064 Artus 120TRK/3000/32W/80/B	1168 x 100.8 x 73.9 ± 1mm	3000	3505	32W	110	110°
162065 Artus 120TRK/4000/32W/80/B	1168 x 100.8 x 73.9 ± 1mm	4000	3655	32W	115	110°
162066 Artus 120TRK/5000/32W/80/B	1168 x 100.8 x 73.9 ± 1mm	5000	3750	32W	118	110°
162067 Artus 120TRK/6500/32W/80/B	1168 x 100.8 x 73.9 ± 1mm	6500	3655	32W	115	110°
162068 Artus 120TRK/3000/38W/80/B	1168 x 100.8 x 73.9 ± 1mm	3000	4135	38W	109	110°
162069 Artus 120TRK/4000/38W/80/B	1168 x 100.8 x 73.9 ± 1mm	4000	4310	38W	114	110°
162070 Artus 120TRK/5000/38W/80/B	1168 x 100.8 x 73.9 ± 1mm	5000	4425	38W	117	110°
162071 Artus 120TRK/6500/38W/80/B	1168 x 100.8 x 73.9 ± 1mm	6500	4310	38W	114	110°
162072 Artus 120TRK/3000/50W/80/B	1168 x 100.8 x 73.9 ± 1mm	3000	5065	50W	102	110°
162073 Artus 120TRK/4000/50W/80/B	1168 x 100.8 x 73.9 ± 1mm	4000	5280	50W	106	110°
162074 Artus 120TRK/5000/50W/80/B	1168 x 100.8 x 73.9 ± 1mm	5000	5425	50W	109	110°
162075 Artus 120TRK/6500/50W/80/B	1168 x 100.8 x 73.9 ± 1mm	6500	5280	50W	106	110°
162076 Artus 150TRK/3000/23W/80/B	1454 x 100.8 x 73.9 ± 1mm	3000	2660	23W	116	110°
162077 Artus 150TRK/4000/23W/80/B	1454 x 100.8 x 73.9 ± 1mm	4000	2775	23W	121	110°
162078 Artus 150TRK/5000/23W/80/B	1454 x 100.8 x 73.9 ± 1mm	5000	2850	23W	124	110°
162079 Artus 150TRK/6500/23W/80/B	1454 x 100.8 x 73.9 ± 1mm	6500	2775	23W	121	110°
162080 Artus 150TRK/3000/33W/80/B	1454 x 100.8 x 73.9 ± 1mm	3000	3860	33W	117	110°
162081 Artus 150TRK/4000/33W/80/B	1454 x 100.8 x 73.9 ± 1mm	4000	4025	33W	122	110°
162082 Artus 150TRK/5000/33W/80/B	1454 x 100.8 x 73.9 ± 1mm	5000	4130	33W	126	110°
162083 Artus 150TRK/6500/33W/80/B	1454 x 100.8 x 73.9 ± 1mm	6500	4025	33W	122	110°
162084 Artus 150TRK/3000/37W/80/B	1454 x 100.8 x 73.9 ± 1mm	3000	4150	37W	113	110°
162085 Artus 150TRK/4000/37W/80/B	1454 x 100.8 x 73.9 ± 1mm	4000	4325	37W	117	110°
162086 Artus 150TRK/5000/37W/80/B	1454 x 100.8 x 73.9 ± 1mm	5000	4440	37W	120	110°
162087 Artus 150TRK/6500/37W/80/B	1454 x 100.8 x 73.9 ± 1mm	6500	4325	37W	117	110°
162088 Artus 150TRK/3000/50W/80/B	1454 x 100.8 x 73.9 ± 1mm	3000	5140	50W	103	110°
162089 Artus 150TRK/4000/50W/80/B	1454 x 100.8 x 73.9 ± 1mm	4000	5355	50W	108	110°
162090 Artus 150TRK/5000/50W/80/B	1454 x 100.8 x 73.9 ± 1mm	5000	5500	50W	110	110°
162091 Artus 150TRK/6500/50W/80/B	1454 x 100.8 x 73.9 ± 1mm	6500	5355	50W	108	110°
162092 Artus 150TRK/3000/60W/80/B	1454 x 100.8 x 73.9 ± 1mm	3000	6260	60W	105	110°
162093 Artus 150TRK/4000/60W/80/B	1454 x 100.8 x 73.9 ± 1mm	4000	6525	60W	109	110°
162094 Artus 150TRK/5000/60W/80/B	1454 x 100.8 x 73.9 ± 1mm	5000	6700	60W	112	110°
162095 Artus 150TRK/6500/60W/80/B	1454 x 100.8 x 73.9 ± 1mm	6500	6525	60W	109	110°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: November 19, 2019 10:48 AM. www.greentek.eu