



## Zephyr Hat 600

### DIRECTED DIFFUSION LIGHTING | DALI SERIES

• Zephyr Hat 600 is a modern pendant light distinguished by its unique, conical shape reminiscent of a hat. This design adds a touch of contemporary elegance while ensuring optimal light distribution. The opaque section of the luminaire guides light through the diffuser, creating both serene and focused lighting effects.


• The luminaire's minimalist yet striking aesthetic makes it a versatile addition to any interior, easily complementing diverse styles. Its sleek form and superior functionality provide balanced illumination with low contrast between lit areas and shadows, enhancing the ambiance with a refined and sophisticated glow.

### FEATURES & BENEFITS

- Lumen maintenance L90/B10@50.000h at 25°C
- IP45
- 5 years warranty
- CRI90 as standard
- Efficiency@4000K - 49 lm/W

### APPLICATION


Grocery & Supermarkets | Retail | Office | Healthcare | Hospitality | DIY | Home

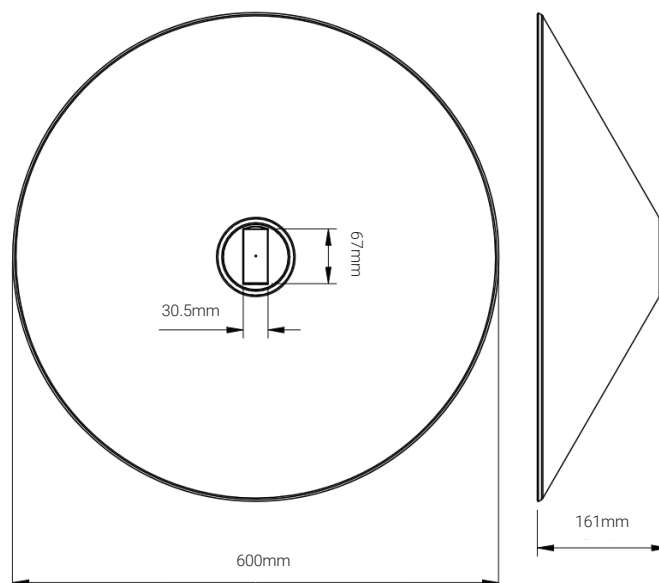

**SPECIFICATIONS**

Power consumption	20 W
Dimensions	Ø600 x 161±1mm
Housing materials	Aluminium, Glass
IK code	IK07
THD (at 230V, 50Hz, Full load)	-
Protection class	Safety class 1
Operating temperature [°C]	-20C...+45C/-4F...+113F
Operating humidity [%]	10 ÷ 85
Power factor	-
DC Input [Vdc]	24 Vdc
Lens angle [°]	130°
Lifespan [h]	50000h
Housing color	● Black NCS 9000-N ● Terra red NCS S 4040-Y70R ● Green NCS S 6005-G80Y ● White NCS 0502-G
Lumen maintenance	L90/B10@50.000h at 25°C
IP factor	IP45
Control optional	-
Warranty [years]	5
Storage temperature range [°C]	-20 ÷ +55

**LIGHT DISTRIBUTION**



130°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI90</b>						
1G6048 Zephyr HAT 600/2700/20W/90/B	Ø600±1mm	2700	980	20W	49	A130
1G6049 Zephyr HAT 600/2700/20W/90/R	Ø600±1mm	2700	980	20W	49	A130
1G6050 Zephyr HAT 600/2700/20W/90/GN	Ø600±1mm	2700	980	20W	49	A130
1G6051 Zephyr HAT 600/2700/20W/90/W	Ø600±1mm	2700	980	20W	49	A130
1G6052 Zephyr HAT 600/3000/20W/90/B	Ø600±1mm	3000	980	20W	49	A130
1G6053 Zephyr HAT 600/3000/20W/90/R	Ø600±1mm	3000	980	20W	49	A130
1G6054 Zephyr HAT 600/3000/20W/90/GN	Ø600±1mm	3000	980	20W	49	A130
1G6055 Zephyr HAT 600/3000/20W/90/W	Ø600±1mm	3000	980	20W	49	A130
1G6056 Zephyr HAT 600/4000/20W/90/B	Ø600±1mm	4000	980	20W	49	A130
1G6057 Zephyr HAT 600/4000/20W/90/R	Ø600±1mm	4000	980	20W	49	A130
1G6058 Zephyr HAT 600/4000/20W/90/GN	Ø600±1mm	4000	980	20W	49	A130
1G6059 Zephyr HAT 600/4000/20W/90/W	Ø600±1mm	4000	980	20W	49	A130

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: July 12, 2024 1:36 AM. [www.greentek.eu](http://www.greentek.eu)