



Stiletto - Chandelier Base Kit

SURFACE MOUNTED | NON-DALI SERIES



Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 100W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

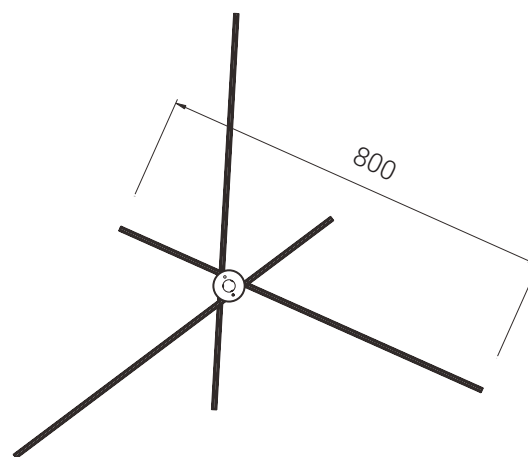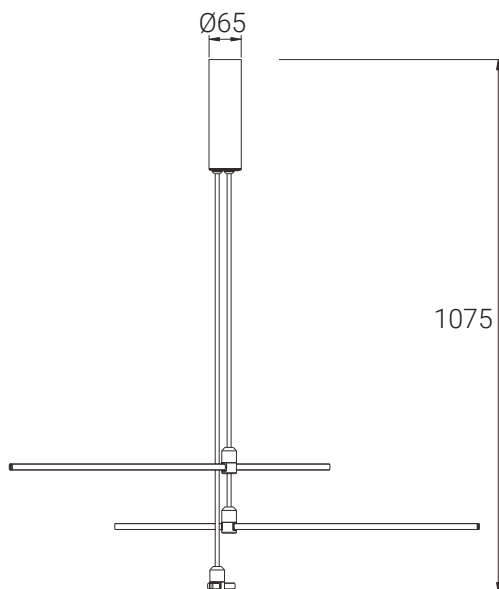

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	100W
Dimensions	Ø65 x L800 x H1075 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9021 Stiletto CHANDELIER/BASE/KIT 1075/100Wmax/24V/Brass	Ø65 x L800 x H1075 mm ± 1mm
1F9022 Stiletto CHANDELIER/BASE/KIT 1075/100Wmax/24V/White	Ø65 x L800 x H1075 mm ± 1mm
1F9023 Stiletto CHANDELIER/BASE/KIT 1075/100Wmax/24V/Black	Ø65 x L800 x H1075 mm ± 1mm



Stiletto - Circle Base Kit

SURFACE MOUNTED | **NON-DALI SERIES**



Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 60W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

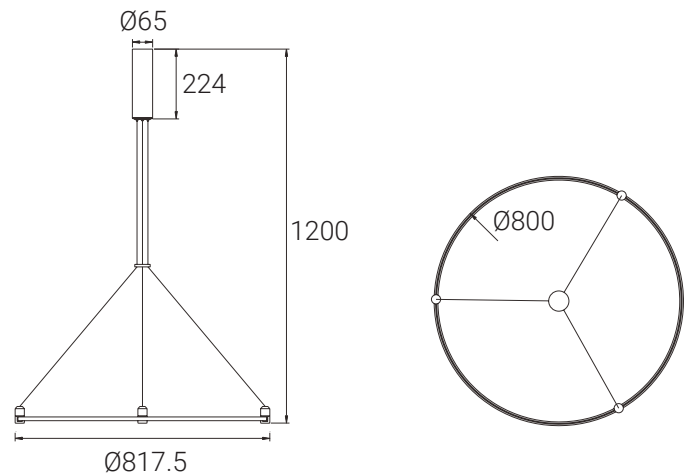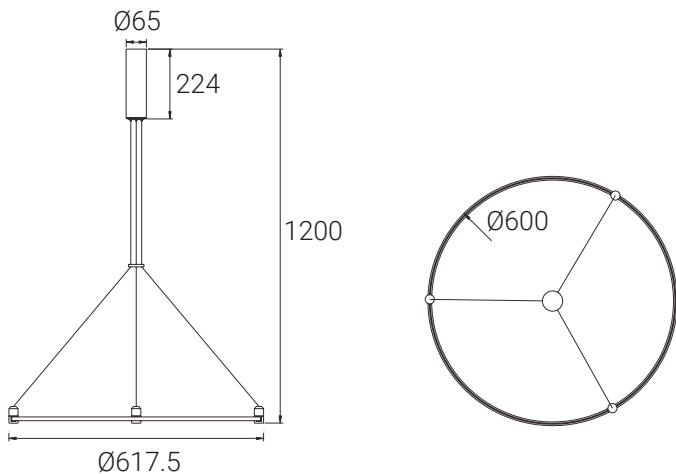

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	60W
Dimensions	Ø617.5 x H1200 mm ± 1mm Ø817.5 x H1200 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9024 Stiletto Circle/BASE/KIT D600/60Wmax/24V/Brass	Ø617.5 x H1200 mm ± 1mm
1F9025 Stiletto Circle/BASE/KIT D600/60Wmax/24V/White	Ø617.5 x H1200 mm ± 1mm
1F9026 Stiletto Circle/BASE/KIT D600/60Wmax/24V/Black	Ø617.5 x H1200 mm ± 1mm
1F9027 Stiletto Circle/BASE/KIT D800/60Wmax/24V/Brass	Ø817.5 x H1200 mm ± 1mm
1F9028 Stiletto Circle/BASE/KIT D800/60Wmax/24V/White	Ø817.5 x H1200 mm ± 1mm
1F9029 Stiletto Circle/BASE/KIT D800/60Wmax/24V/Black	Ø817.5 x H1200 mm ± 1mm



Stiletto - Circle Base Kit 2 in 1

SURFACE MOUNTED | NON-DALI SERIES



Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 200W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

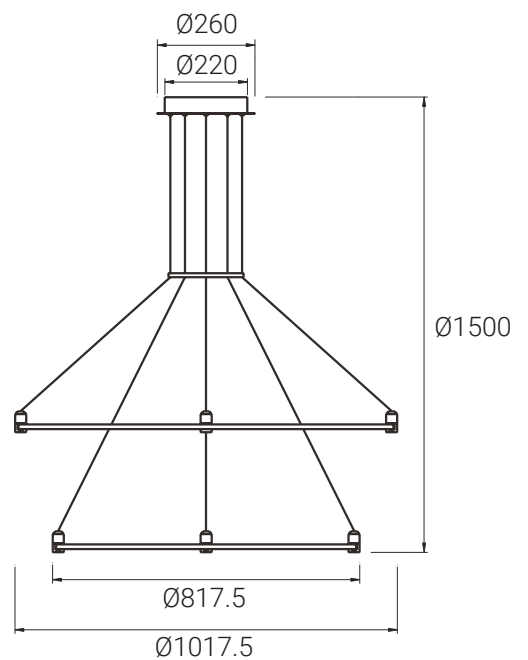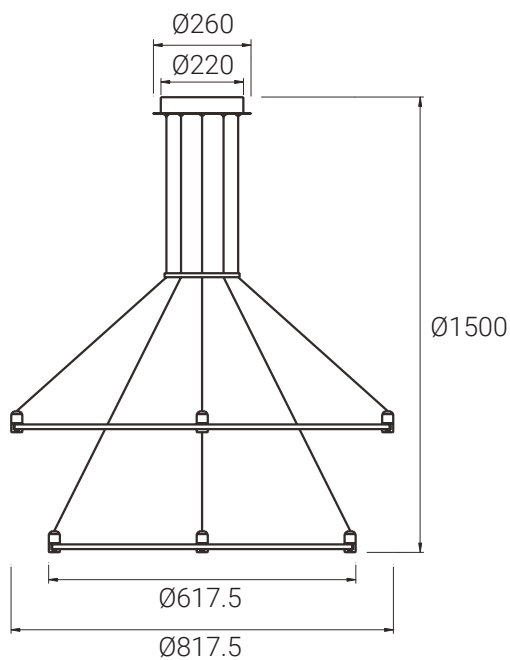

SPECIFICATIONS

Mounting type	Surface mounted	
Max power consumption	200W	
Dimensions	Ø617.5 x Ø817.5 x H1500 mm ± 1mm	Ø817.5 x Ø1017.5 x H1500 mm ± 1mm
Housing materials	Aluminium	
IK code	IK00	
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F	
Operating humidity [%]	20 ÷ 90	
AC Input [Vac]	220 - 240 VAC (Driver included)	
Lifespan [h]	50.000	
Housing color	Brass, White ,Black	
Power factor	≥0.95	
IP factor	IP20	
Warranty [years]	5	
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F	

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9033 Stiletto Circle/BASE/KIT 2in1 D1000/D800/200Wmax/24V/Brass	Ø817.5 x Ø1017.5 x H1500 mm ± 1mm
1F9034 Stiletto Circle/BASE/KIT 2in1 D1000/D800/200Wmax/24V/White	Ø817.5 x Ø1017.5 x H1500 mm ± 1mm
1F9035 Stiletto Circle/BASE/KIT 2in1 D1000/D800/200Wmax/24V/Black	Ø817.5 x Ø1017.5 x H1500 mm ± 1mm
1F9036 Stiletto Circle/BASE/KIT 2in1 D800/D600/200Wmax/24V/Brass	Ø617.5 x Ø817.5 x H1500 mm ± 1mm
1F9037 Stiletto Circle/BASE/KIT 2in1 D800/D600/200Wmax/24V/White	Ø617.5 x Ø817.5 x H1500 mm ± 1mm
1F9038 Stiletto Circle/BASE/KIT 2in1 D800/D600/200Wmax/24V/Black	Ø617.5 x Ø817.5 x H1500 mm ± 1mm



Stiletto - Circle Base Kit 3 in 1

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 350W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

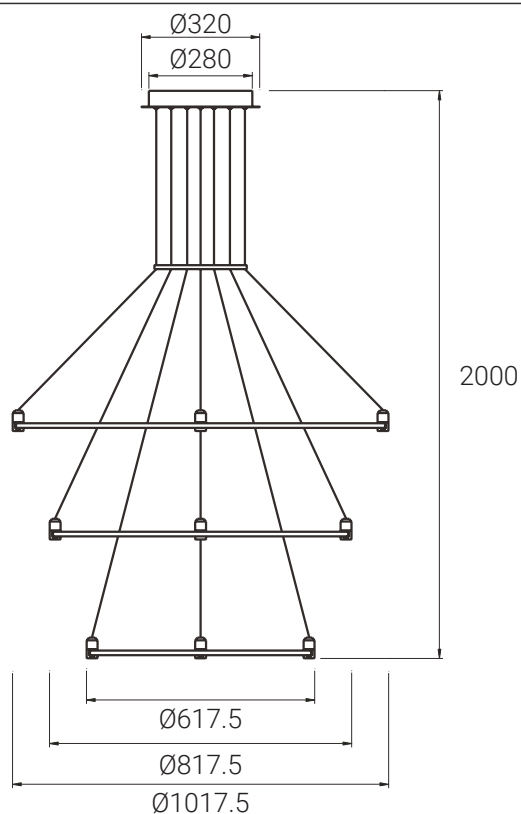

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	350W
Dimensions	Ø617.5 x Ø817.5 x Ø1017.5 x H2000 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9030 Stiletto Circle/BASE/KIT 3in1 D600/D800/D1000/350Wmax/24V/Brass	Ø617.5 x Ø817.5 x Ø1017.5 x H2000 mm ± 1mm
1F9031 Stiletto Circle/BASE/KIT 3in1 D600/D800/D1000/350Wmax/24V/White	Ø617.5 x Ø817.5 x Ø1017.5 x H2000 mm ± 1mm
1F9032 Stiletto Circle/BASE/KIT 3in1 D600/D800/D1000/350Wmax/24V/Black	Ø617.5 x Ø817.5 x Ø1017.5 x H2000 mm ± 1mm



Stiletto - Desk Base Kit

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 18W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

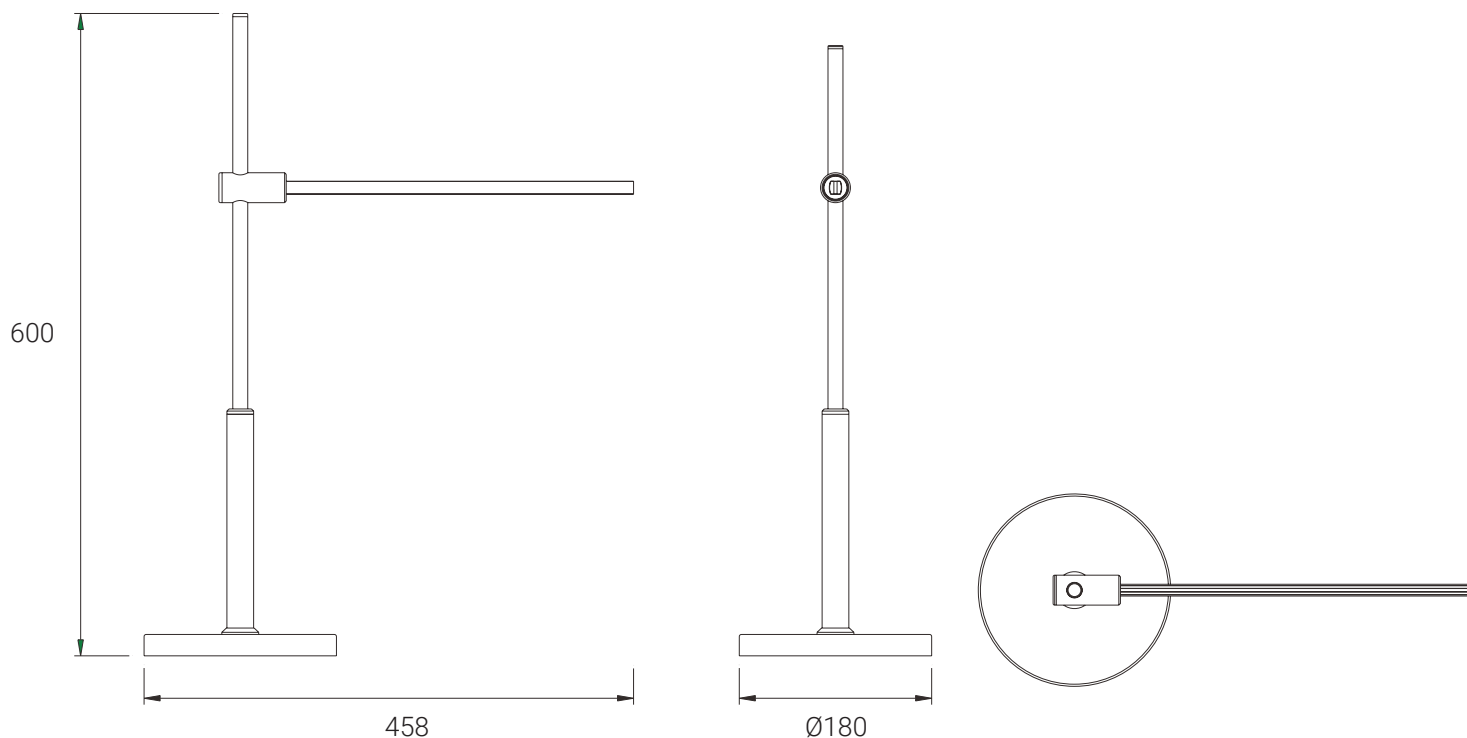

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	18W
Dimensions	Ø180 x l458 x H600 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9503 Stiletto Floor BASE/H1700/max20W/24V/Brass	Ø250 x 1493 x H1700 mm ± 1mm
1F9504 Stiletto Floor BASE/H1700/max20W/24V/White	Ø250 x 1493 x H1700 mm ± 1mm
1F9505 Stiletto Floor BASE/H1700/max20W/24V/Black	Ø250 x 1493 x H1700 mm ± 1mm



Stiletto - Floor Base Kit

SURFACE MOUNTED | **NON-DALI SERIES**


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 20W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

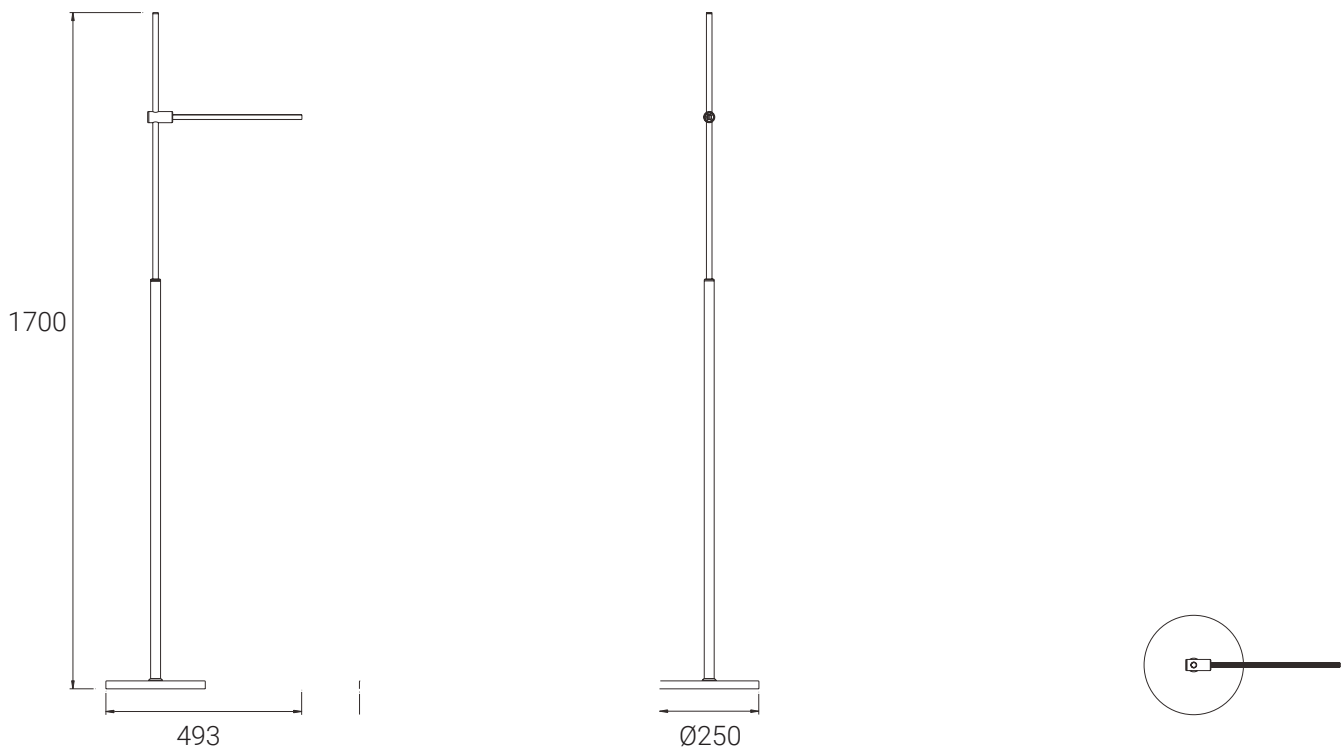

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	20W
Dimensions	Ø250 x l493 x H1700 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9503 Stiletto Floor BASE/H1700/max20W/24V/Brass	Ø250 x 1493 x H1700 mm ± 1mm
1F9504 Stiletto Floor BASE/H1700/max20W/24V/White	Ø250 x 1493 x H1700 mm ± 1mm
1F9505 Stiletto Floor BASE/H1700/max20W/24V/Black	Ø250 x 1493 x H1700 mm ± 1mm



Stiletto - MD - 2XL Base Kit

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

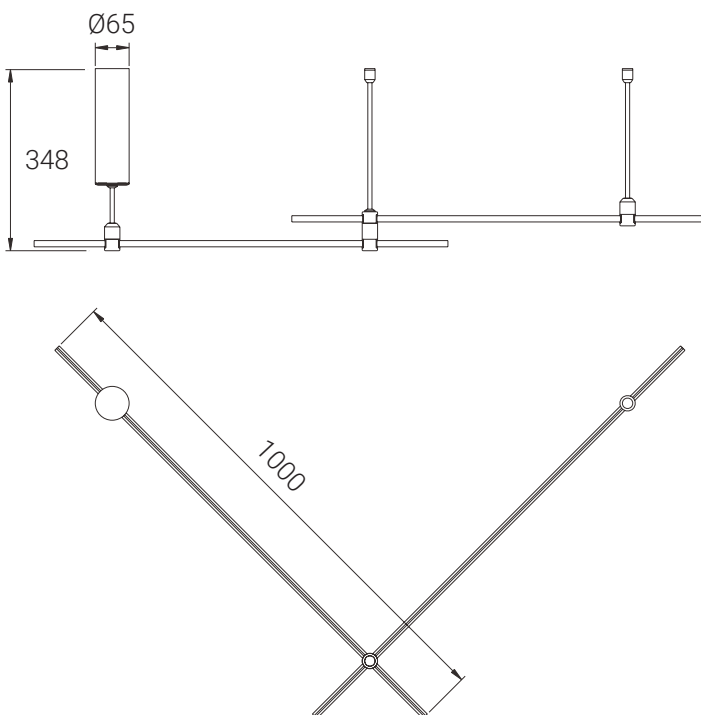


SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	-
Dimensions	L2x1000 x H348 mm x Ø 65 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9012 Stiletto MD L/BASE/KIT 2x1000mm/24V/Brass	L2x1000 x H348 mm x Ø 65 mm ± 1mm
1F9013 Stiletto MD L/BASE/KIT 2x1000mm/24V/White	L2x1000 x H348 mm x Ø 65 mm ± 1mm
1F9014 Stiletto MD L/BASE/KIT 2x1000mm/24V/Black	L2x1000 x H348 mm x Ø 65 mm ± 1mm

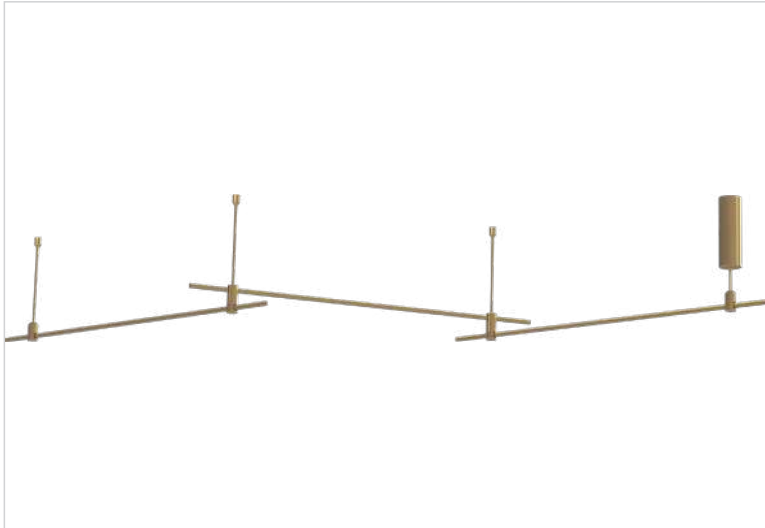

Stiletto - MD - 3XL Base Kit

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

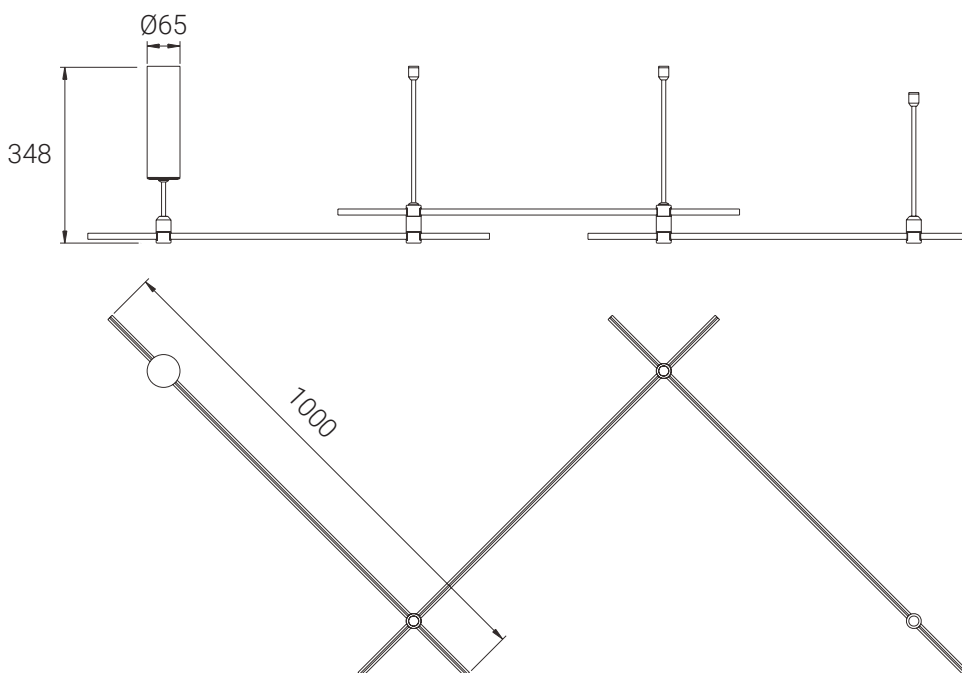


SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	-
Dimensions	L3x1000 x H348 x Ø 65 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9015 Stiletto MD L/BASE/KIT 3x1000mm/24V/Brass	L3x1000 x H348 x Ø 65 mm ± 1mm
1F9016 Stiletto MD L/BASE/KIT 3x1000mm/24V/White	L3x1000 x H348 x Ø 65 mm ± 1mm
1F9017 Stiletto MD L/BASE/KIT 3x1000mm/24V/Black	L3x1000 x H348 x Ø 65 mm ± 1mm

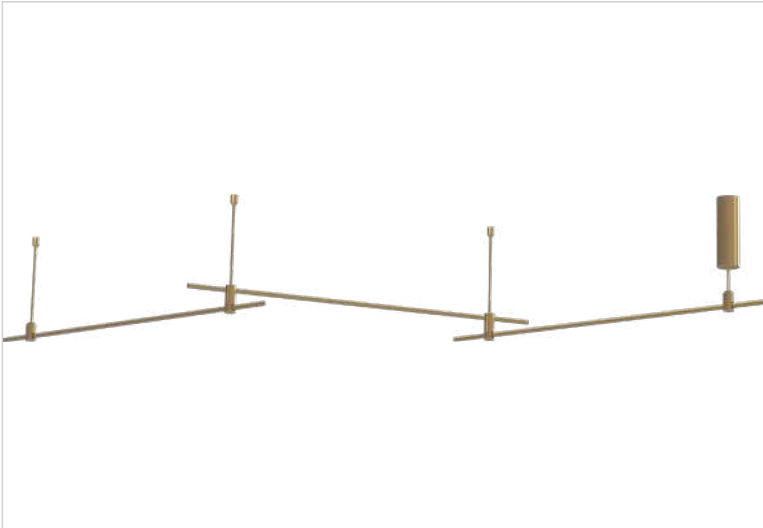

Stiletto - MD - 4XL Base Kit

SURFACE MOUNTED | NON-DALI SERIES



Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

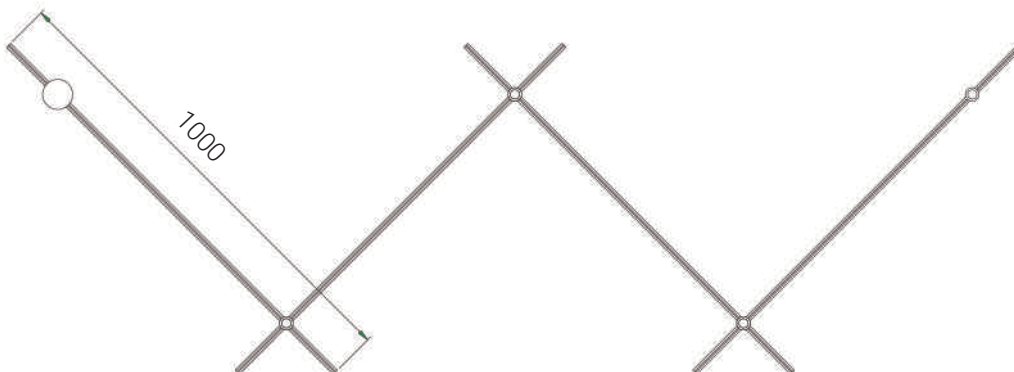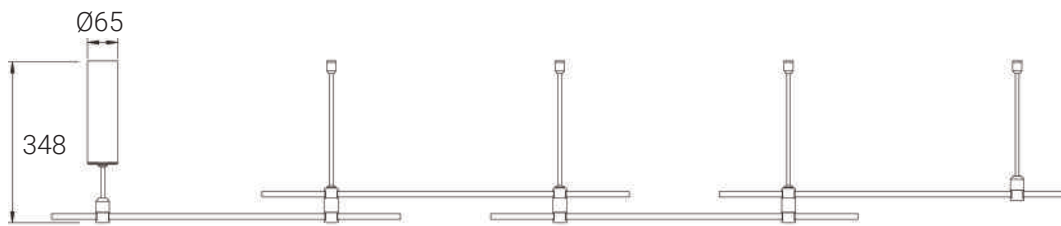


SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	-
Dimensions	L4x1000 x H348 x Ø 65 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9018 Stiletto MD L/BASE/KIT 4x1000mm/24V/Brass	L4x1000 x H348 x Ø 65 mm ± 1mm
1F9019 Stiletto MD L/BASE/KIT 4x1000mm/24V/White	L4x1000 x H348 x Ø 65 mm ± 1mm
1F9020 Stiletto MD L/BASE/KIT 4x1000mm/24V/Black	L4x1000 x H348 x Ø 65 mm ± 1mm

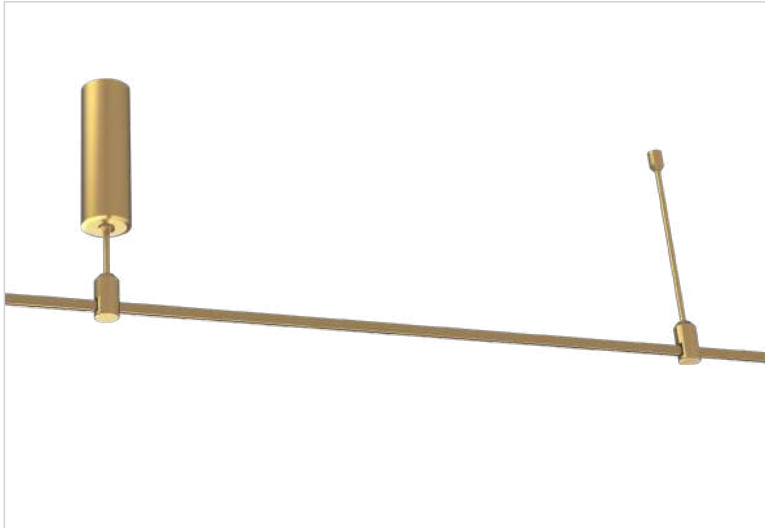

Stiletto - MD - L Base Kit

SURFACE MOUNTED | NON-DALI SERIES


Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

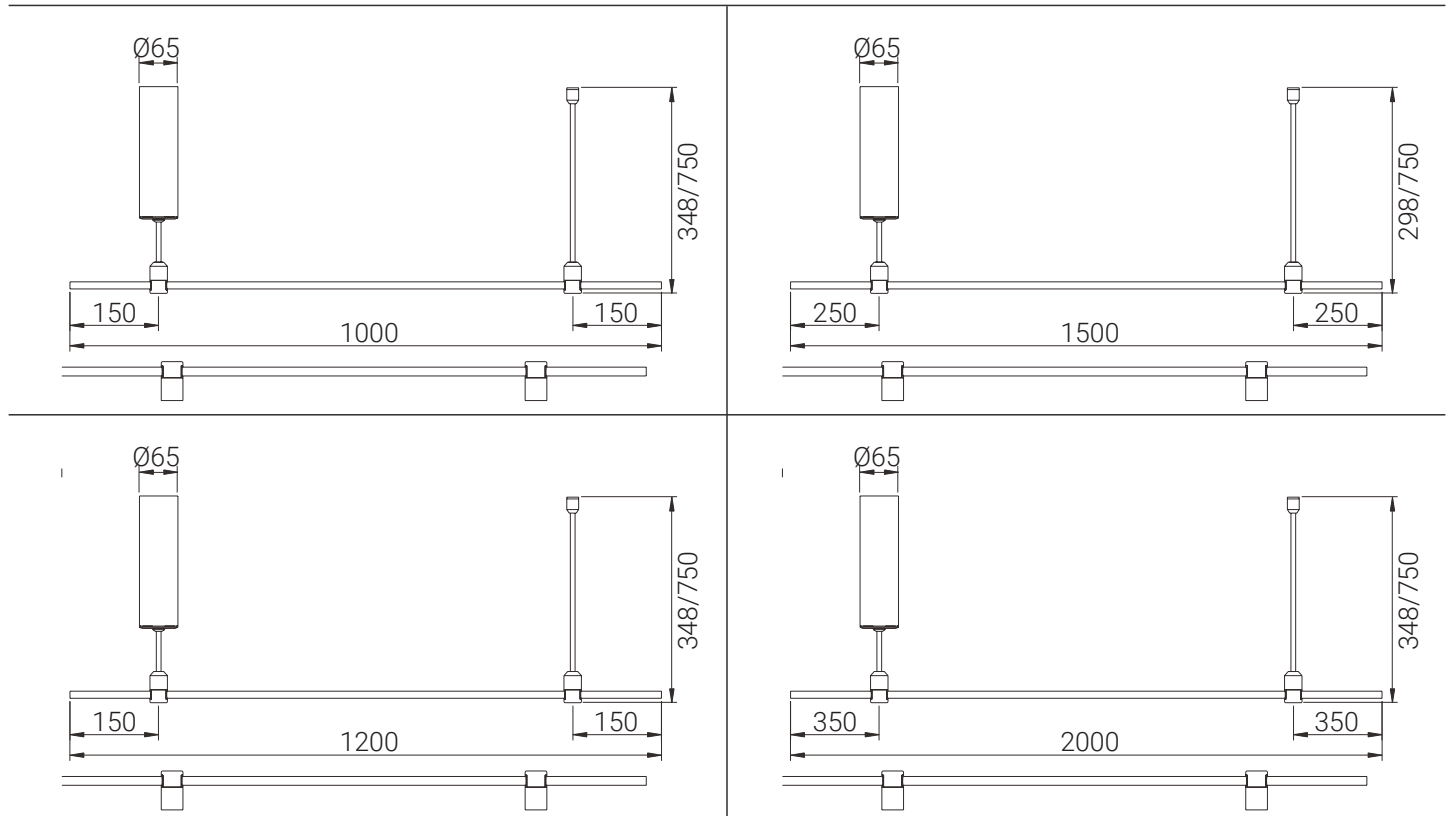

SPECIFICATIONS

Mounting type	Surface mounted
Max power consumption	-
Dimensions	L1000 x H750 mm ± 1mm L1200 x H750 mm ± 1mm L1500 x H750 mm ± 1mm L2000 x H750 mm ± 1mm
Housing materials	Aluminium
IK code	IK00
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F
Operating humidity [%]	20 ÷ 90
AC Input [Vac]	220 - 240 VAC (Driver included)
Lifespan [h]	50.000
Housing color	Brass, White ,Black
Power factor	≥0.95
IP factor	IP20
Warranty [years]	5
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9000 Stiletto MD L/BASE/KIT 1000/24V/Brass	L1000 x H750 mm ± 1mm
1F9001 Stiletto MD L/BASE/KIT 1000/24V/White	L1000 x H750 mm ± 1mm
1F9002 Stiletto MD L/BASE/KIT 1000/24V/Black	L1000 x H750 mm ± 1mm
1F9003 Stiletto MD L/BASE/KIT 1200/24V/Brass	L1200 x H750 mm ± 1mm
1F9004 Stiletto MD L/BASE/KIT 1200/24V/White	L1200 x H750 mm ± 1mm
1F9005 Stiletto MD L/BASE/KIT 1200/24V/Black	L1200 x H750 mm ± 1mm
1F9006 Stiletto MD L/BASE/KIT 1500/24V/Brass	L1500 x H750 mm ± 1mm
1F9007 Stiletto MD L/BASE/KIT 1500/24V/White	L1500 x H750 mm ± 1mm
1F9008 Stiletto MD L/BASE/KIT 1500/24V/Black	L1500 x H750 mm ± 1mm
1F9009 Stiletto MD L/BASE/KIT 2000/24V/Brass	L2000 x H750 mm ± 1mm
1F9010 Stiletto MD L/BASE/KIT 2000/24V/White	L2000 x H750 mm ± 1mm
1F9011 Stiletto MD L/BASE/KIT 2000/24V/Black	L2000 x H750 mm ± 1mm



Stiletto - MD - Square Base Kit

SURFACE MOUNTED | NON-DALI SERIES



Step into a realm of refined illumination with Stiletto, a collection that combines the allure of golden aesthetics with the precision of LED technology.

FEATURES & BENEFITS

- Materials: Aluminium
- Max power consumption: 60W

APPLICATION

High End Grocery & Supermarkets | Fashion Retailers | Art & Exhibitions | DIY

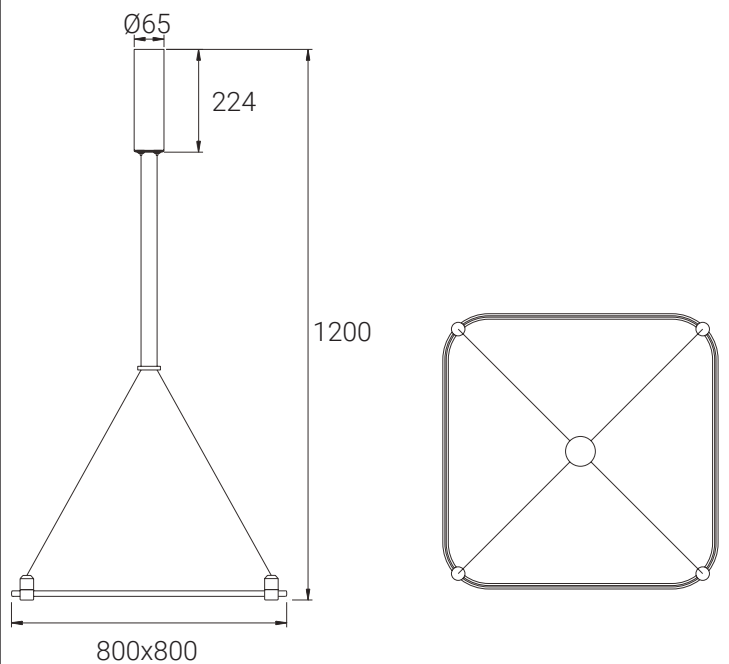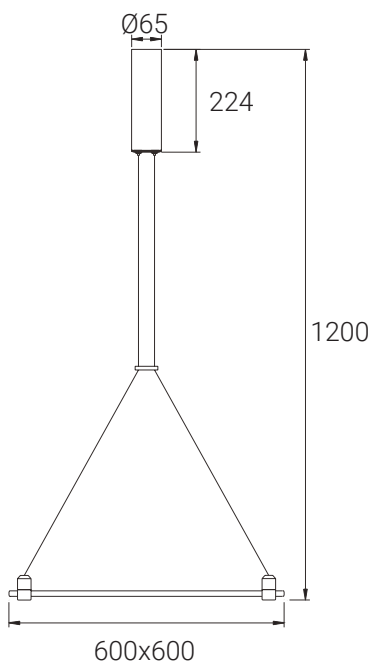

SPECIFICATIONS

Mounting type	Surface mounted	
Max power consumption	60W	
Dimensions	L600 x l600 x H1200 mm ± 1mm	L800 x l800 x H1200 mm ± 1mm
Housing materials	Aluminium	
IK code	IK00	
Operating temperature [°C]	-20°C ... +40°C / -4F ... +104F	
Operating humidity [%]	20 ÷ 90	
AC Input [Vac]	220 - 240 VAC (Driver included)	
Lifespan [h]	50.000	
Housing color	Brass, White ,Black	
Power factor	≥0.95	
IP factor	IP20	
Warranty [years]	5	
Storage temperature range [°C]	10°C ... +30°C / 50°F ... +86°F	

SKU SPECIFICATIONS

Product Code	Dimensions (mm)
CRI 90	
1F9048 Stiletto Square/BASE/KIT I600/60Wmax/24V/Brass	L600 x I600 x H1200 mm ± 1mm
1F9049 Stiletto Square/BASE/KIT I600/60Wmax/24V/White	L600 x I600 x H1200 mm ± 1mm
1F9050 Stiletto Square/BASE/KIT I600/60Wmax/24V/Black	L600 x I600 x H1200 mm ± 1mm
1F9051 Stiletto Square/BASE/KIT I800/60Wmax/24V/Brass	L800 x I800 x H1200 mm ± 1mm
1F9052 Stiletto Square/BASE/KIT I800/60Wmax/24V/White	L800 x I800 x H1200 mm ± 1mm
1F9053 Stiletto Square/BASE/KIT I800/60Wmax/24V/Black	L800 x I800 x H1200 mm ± 1mm