



Linea TRK

LINEA TRK | NON-DALI SERIES

LINEA TRK Individual Lens is a versatile track luminaire, creates a mellow ambient, pleasant light, appropriate for office environments in particular.

Linea TRK Individual Lens has several series, determined by various add-on and controls:


- Linea TRK Individual Lens Non-DALI: the standard for any project in the retail sector
- Linea TRK Individual Lens DALI: with DALI controls for illumination adjustments

FEATURES & BENEFITS

- CRI 90 as standard
- Color temperatures: 3000K and 4000K
- Angle: 15°, 24° and 36°

APPLICATION

Grocery & Supermarket | Retail | Art & Exhibition

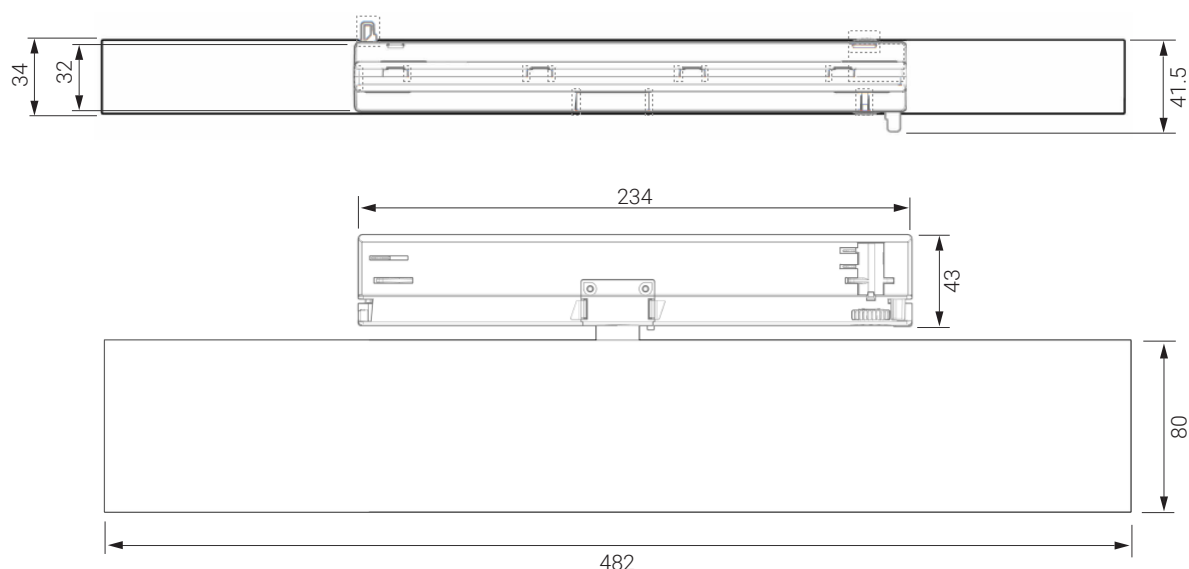


SPECIFICATIONS

Power consumption	30W
Dimensions	482x80x34±1mm
Weight	0.9 kg
Housing materials	Aluminium, Polycarbonate
IK Code	IK02
Protection class	Safety class 1
AC Input [Vac]	220 - 240 VAC
Lens angle [°]	15°, 24°, 36°
Lifespan [h]	50.000
Housing color	○ RAL 9003 - Signal white, ● RAL 9005 - Jet Black, ● RAL 9006 - White Aluminium
Lumen maintenance	L90/B10@50.000h at 25°C
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F
Storage temperature range [°C]	-10°C ... +45°C / +14F ... +113F
Operating humidity [%]	10 ÷ 85
IP factor	IP20
Control optional	-
Warranty [years]	5

Application	Standard
CRI	CRI 90
CCT [K]	3000K/4000K
MacAdam	3

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

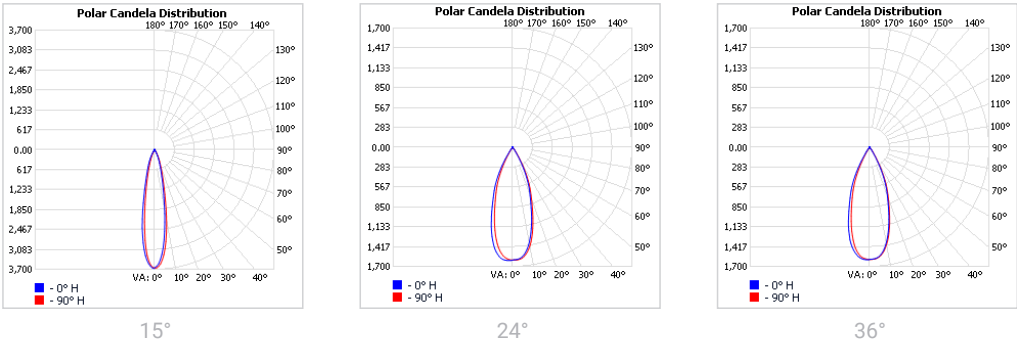

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 90						
1G8012 Linea TRK S3-1118/3000/30W/90/A15	482x80x34±1mm	3000K	1865	30W	63	15°
1G8013 Linea TRK S3-1118/4000/30W/90/A15	482x80x34±1mm	4000K	1865	30W	63	15°
1G8014 Linea TRK S3-1118/3000/30W/90/A24	482x80x34±1mm	3000K	2170	30W	73	24°
1G8015 Linea TRK S3-1118/4000/30W/90/A24	482x80x34±1mm	4000K	2170	30W	73	24°
1G8016 Linea TRK S3-1118/3000/30W/90/A36	482x80x34±1mm	3000K	2125	30W	71	36°
1G8017 Linea TRK S3-1118/4000/30W/90/A36	482x80x34±1mm	4000K	2125	30W	71	36°