

Lenyk N IL Surface Mounted

SURFACE MOUNTED | DALI SERIES

A linear luminaire that is extremely easy to install and provides high efficiency. Flexible in application, Lenyk N IL Surface Mounted comes with a narrower, compact and minimalist housing and meets the optimum lighting requirements in the industrial or retail sectors. A luminaire that incorporates both high functionality and efficiency.

Lenyk N IL Surface Mounted has several series, determined by various add-on and controls:


- Lenyk N IL Surface Mounted Non-DALI: the standard for industrial, DIY and retail spaces
- Lenyk N IL Surface Mounted Non-DALI EM: with emergency lighting kit
- [Lenyk N IL Surface Mounted DALI: with DALI dimming](#)
- Lenyk N IL Surface Mounted DALI EM: with dimming and emergency kit

Features & benefits

- CRI ≥ 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171lm/w @4000K
- Wide range of lens angles: TB (30°), NB (60°), WB (90°), DA (Double Asymmetric), SA (Simple Asymmetric)
- Dimmable

Applications & References

Grocery & Supermarket | Retail | Industrial & Logistic | DIY

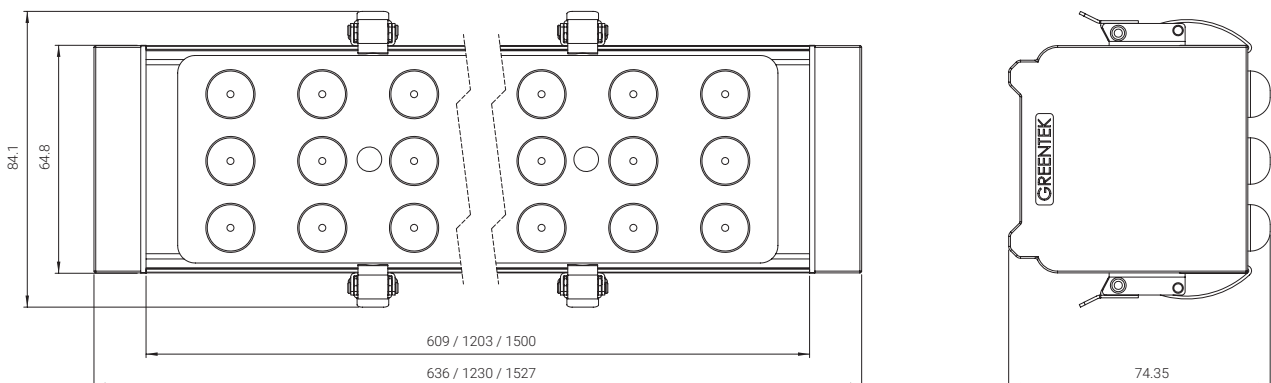


SPECIFICATIONS

Power consumption	12W, 20W	21W, 37W, 44W, 50W	26W, 35W, 45W, 53W, 62W
Dimensions	636 x 74.5 x 84.1 ± 1mm	1230 x 74.5 x 84.1 ± 1mm	1527 x 74.5 x 84.1 ± 1mm
Weight	2 Kg	2.8 Kg	3.4 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA, SA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

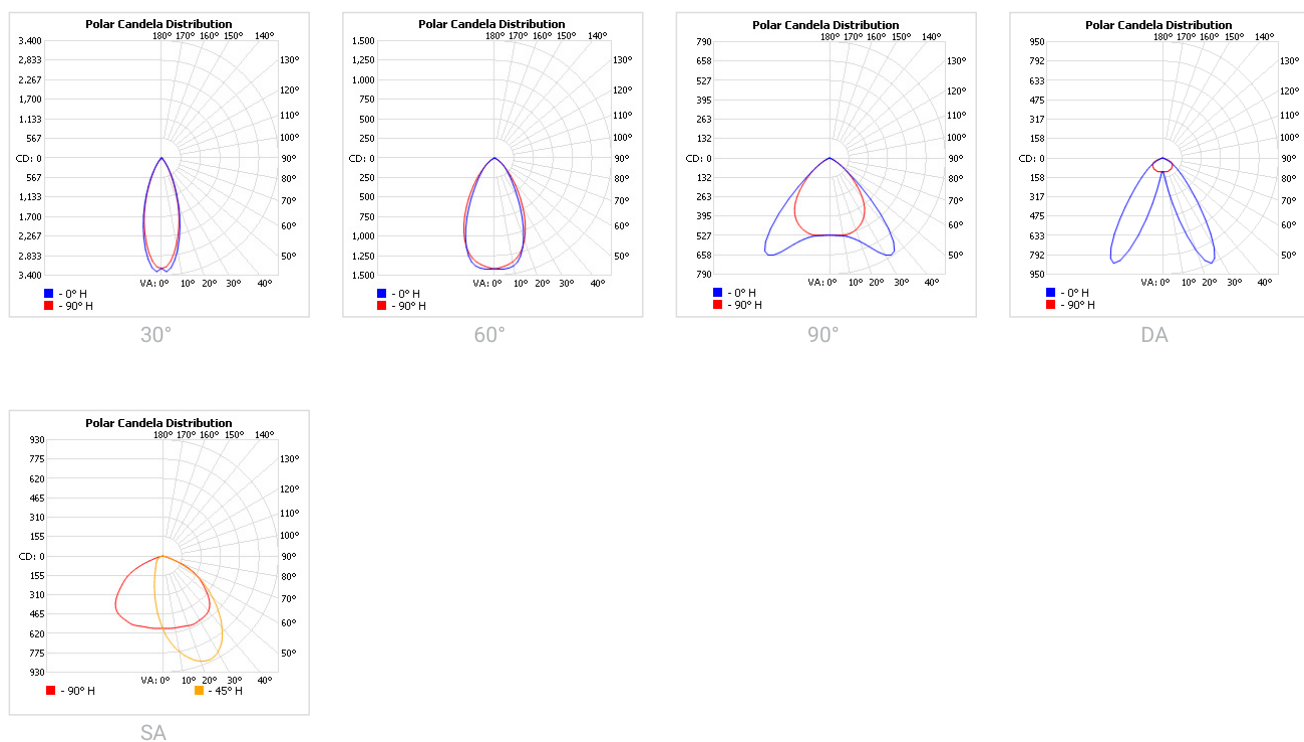

TOLERANCES**Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
< 80W	DALI	27	21	13	45	35	21

RISK GROUP**Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
286000 LenyknIL SM60/3000/12W/80/TB	636 x 74.5 x 84.1 ± 1mm	3000	1740	12W	145	30°
286001 LenyknIL SM60/4000/12W/80/TB	636 x 74.5 x 84.1 ± 1mm	4000	1810	12W	151	30°
286002 LenyknIL SM60/5000/12W/80/TB	636 x 74.5 x 84.1 ± 1mm	5000	1860	12W	155	30°
286003 LenyknIL SM60/6500/12W/80/TB	636 x 74.5 x 84.1 ± 1mm	6500	1810	12W	151	30°
286004 LenyknIL SM60/3000/12W/80/NB	636 x 74.5 x 84.1 ± 1mm	3000	1725	12W	144	60°
286005 LenyknIL SM60/4000/12W/80/NB	636 x 74.5 x 84.1 ± 1mm	4000	1800	12W	150	60°
286006 LenyknIL SM60/5000/12W/80/NB	636 x 74.5 x 84.1 ± 1mm	5000	1845	12W	154	60°
286007 LenyknIL SM60/6500/12W/80/NB	636 x 74.5 x 84.1 ± 1mm	6500	1800	12W	150	60°
286008 LenyknIL SM60/3000/12W/80/WB	636 x 74.5 x 84.1 ± 1mm	3000	1735	12W	145	90°
286009 LenyknIL SM60/4000/12W/80/WB	636 x 74.5 x 84.1 ± 1mm	4000	1805	12W	151	90°
286010 LenyknIL SM60/5000/12W/80/WB	636 x 74.5 x 84.1 ± 1mm	5000	1855	12W	155	90°
286011 LenyknIL SM60/6500/12W/80/WB	636 x 74.5 x 84.1 ± 1mm	6500	1805	12W	151	90°
286012 LenyknIL SM60/3000/12W/80/DA	636 x 74.5 x 84.1 ± 1mm	3000	1725	12W	144	DA
286013 LenyknIL SM60/4000/12W/80/DA	636 x 74.5 x 84.1 ± 1mm	4000	1800	12W	150	DA
286014 LenyknIL SM60/5000/12W/80/DA	636 x 74.5 x 84.1 ± 1mm	5000	1845	12W	154	DA
286015 LenyknIL SM60/6500/12W/80/DA	636 x 74.5 x 84.1 ± 1mm	6500	1800	12W	150	DA
286016 LenyknIL SM60/3000/12W/80/SA	636 x 74.5 x 84.1 ± 1mm	3000	1655	12W	138	SA
286017 LenyknIL SM60/4000/12W/80/SA	636 x 74.5 x 84.1 ± 1mm	4000	1725	12W	144	SA
286018 LenyknIL SM60/5000/12W/80/SA	636 x 74.5 x 84.1 ± 1mm	5000	1770	12W	148	SA
286019 LenyknIL SM60/6500/12W/80/SA	636 x 74.5 x 84.1 ± 1mm	6500	1725	12W	144	SA
286020 LenyknIL SM60/3000/20W/80/TB	636 x 74.5 x 84.1 ± 1mm	3000	2895	20W	145	30°
286021 LenyknIL SM60/4000/20W/80/TB	636 x 74.5 x 84.1 ± 1mm	4000	3020	20W	151	30°
286022 LenyknIL SM60/5000/20W/80/TB	636 x 74.5 x 84.1 ± 1mm	5000	3100	20W	155	30°
286023 LenyknIL SM60/6500/20W/80/TB	636 x 74.5 x 84.1 ± 1mm	6500	3020	20W	151	30°
286024 LenyknIL SM60/3000/20W/80/NB	636 x 74.5 x 84.1 ± 1mm	3000	2875	20W	144	60°
286025 LenyknIL SM60/4000/20W/80/NB	636 x 74.5 x 84.1 ± 1mm	4000	2995	20W	150	60°
286026 LenyknIL SM60/5000/20W/80/NB	636 x 74.5 x 84.1 ± 1mm	5000	3075	20W	154	60°
286027 LenyknIL SM60/6500/20W/80/NB	636 x 74.5 x 84.1 ± 1mm	6500	2995	20W	150	60°
286028 LenyknIL SM60/3000/20W/80/WB	636 x 74.5 x 84.1 ± 1mm	3000	2890	20W	145	90°
286029 LenyknIL SM60/4000/20W/80/WB	636 x 74.5 x 84.1 ± 1mm	4000	3010	20W	151	90°
286030 LenyknIL SM60/5000/20W/80/WB	636 x 74.5 x 84.1 ± 1mm	5000	3090	20W	155	90°
286031 LenyknIL SM60/6500/20W/80/WB	636 x 74.5 x 84.1 ± 1mm	6500	3010	20W	151	90°
286032 LenyknIL SM60/3000/20W/80/DA	636 x 74.5 x 84.1 ± 1mm	3000	2875	20W	144	DA
286033 LenyknIL SM60/4000/20W/80/DA	636 x 74.5 x 84.1 ± 1mm	4000	2995	20W	150	DA
286034 LenyknIL SM60/5000/20W/80/DA	636 x 74.5 x 84.1 ± 1mm	5000	3075	20W	154	DA
286035 LenyknIL SM60/6500/20W/80/DA	636 x 74.5 x 84.1 ± 1mm	6500	2995	20W	150	DA
286036 LenyknIL SM60/3000/20W/80/SA	636 x 74.5 x 84.1 ± 1mm	3000	2755	20W	138	SA
286037 LenyknIL SM60/4000/20W/80/SA	636 x 74.5 x 84.1 ± 1mm	4000	2875	20W	144	SA
286038 LenyknIL SM60/5000/20W/80/SA	636 x 74.5 x 84.1 ± 1mm	5000	2950	20W	148	SA
286039 LenyknIL SM60/6500/20W/80/SA	636 x 74.5 x 84.1 ± 1mm	6500	2875	20W	144	SA
286040 LenyknIL SM120/3000/21W/80/TB	1230 x 74.5 x 84.1 ± 1mm	3000	3445	21W	165	30°
286041 LenyknIL SM120/4000/21W/80/TB	1230 x 74.5 x 84.1 ± 1mm	4000	3590	21W	171	30°
286042 LenyknIL SM120/5000/21W/80/TB	1230 x 74.5 x 84.1 ± 1mm	5000	3685	21W	176	30°
286043 LenyknIL SM120/6500/21W/80/TB	1230 x 74.5 x 84.1 ± 1mm	6500	3590	21W	171	30°
286044 LenyknIL SM120/3000/21W/80/NB	1230 x 74.5 x 84.1 ± 1mm	3000	3420	21W	163	60°
286045 LenyknIL SM120/4000/21W/80/NB	1230 x 74.5 x 84.1 ± 1mm	4000	3565	21W	170	60°
286046 LenyknIL SM120/5000/21W/80/NB	1230 x 74.5 x 84.1 ± 1mm	5000	3660	21W	175	60°
286047 LenyknIL SM120/6500/21W/80/NB	1230 x 74.5 x 84.1 ± 1mm	6500	3565	21W	170	60°
286048 LenyknIL SM120/3000/21W/80/WB	1230 x 74.5 x 84.1 ± 1mm	3000	3435	21W	164	90°
286049 LenyknIL SM120/4000/21W/80/WB	1230 x 74.5 x 84.1 ± 1mm	4000	3580	21W	171	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
286050 LenyknIL SM120/5000/21W/80/WB	1230 x 74.5 x 84.1 ± 1mm	5000	3675	21W	175	90°
286051 LenyknIL SM120/6500/21W/80/WB	1230 x 74.5 x 84.1 ± 1mm	6500	3580	21W	171	90°
286052 LenyknIL SM120/3000/21W/80/DA	1230 x 74.5 x 84.1 ± 1mm	3000	3420	21W	163	DA
286053 LenyknIL SM120/4000/21W/80/DA	1230 x 74.5 x 84.1 ± 1mm	4000	3565	21W	170	DA
286054 LenyknIL SM120/5000/21W/80/DA	1230 x 74.5 x 84.1 ± 1mm	5000	3660	21W	175	DA
286055 LenyknIL SM120/6500/21W/80/DA	1230 x 74.5 x 84.1 ± 1mm	6500	3565	21W	170	DA
286056 LenyknIL SM120/3000/21W/80/SA	1230 x 74.5 x 84.1 ± 1mm	3000	3280	21W	157	SA
286057 LenyknIL SM120/4000/21W/80/SA	1230 x 74.5 x 84.1 ± 1mm	4000	3415	21W	163	SA
286058 LenyknIL SM120/5000/21W/80/SA	1230 x 74.5 x 84.1 ± 1mm	5000	3510	21W	168	SA
286059 LenyknIL SM120/6500/21W/80/SA	1230 x 74.5 x 84.1 ± 1mm	6500	3415	21W	163	SA
286060 LenyknIL SM120/3000/37W/80/TB	1230 x 74.5 x 84.1 ± 1mm	3000	5615	37W	152	30°
286061 LenyknIL SM120/4000/37W/80/TB	1230 x 74.5 x 84.1 ± 1mm	4000	5850	37W	159	30°
286062 LenyknIL SM120/5000/37W/80/TB	1230 x 74.5 x 84.1 ± 1mm	5000	6010	37W	163	30°
286063 LenyknIL SM120/6500/37W/80/TB	1230 x 74.5 x 84.1 ± 1mm	6500	5850	37W	159	30°
286064 LenyknIL SM120/3000/37W/80/NB	1230 x 74.5 x 84.1 ± 1mm	3000	5575	37W	151	60°
286065 LenyknIL SM120/4000/37W/80/NB	1230 x 74.5 x 84.1 ± 1mm	4000	5810	37W	158	60°
286066 LenyknIL SM120/5000/37W/80/NB	1230 x 74.5 x 84.1 ± 1mm	5000	5965	37W	162	60°
286067 LenyknIL SM120/6500/37W/80/NB	1230 x 74.5 x 84.1 ± 1mm	6500	5810	37W	158	60°
286068 LenyknIL SM120/3000/37W/80/WB	1230 x 74.5 x 84.1 ± 1mm	3000	5600	37W	152	90°
286069 LenyknIL SM120/4000/37W/80/WB	1230 x 74.5 x 84.1 ± 1mm	4000	5835	37W	158	90°
286070 LenyknIL SM120/5000/37W/80/WB	1230 x 74.5 x 84.1 ± 1mm	5000	5995	37W	163	90°
286071 LenyknIL SM120/6500/37W/80/WB	1230 x 74.5 x 84.1 ± 1mm	6500	5835	37W	158	90°
286072 LenyknIL SM120/3000/37W/80/DA	1230 x 74.5 x 84.1 ± 1mm	3000	5575	37W	151	DA
286073 LenyknIL SM120/4000/37W/80/DA	1230 x 74.5 x 84.1 ± 1mm	4000	5810	37W	158	DA
286074 LenyknIL SM120/5000/37W/80/DA	1230 x 74.5 x 84.1 ± 1mm	5000	5965	37W	162	DA
286075 LenyknIL SM120/6500/37W/80/DA	1230 x 74.5 x 84.1 ± 1mm	6500	5810	37W	158	DA
286076 LenyknIL SM120/3000/37W/80/SA	1230 x 74.5 x 84.1 ± 1mm	3000	5345	37W	145	SA
286077 LenyknIL SM120/4000/37W/80/SA	1230 x 74.5 x 84.1 ± 1mm	4000	5570	37W	151	SA
286078 LenyknIL SM120/5000/37W/80/SA	1230 x 74.5 x 84.1 ± 1mm	5000	5720	37W	155	SA
286079 LenyknIL SM120/6500/37W/80/SA	1230 x 74.5 x 84.1 ± 1mm	6500	5570	37W	151	SA
286080 LenyknIL SM120/3000/44W/80/TB	1230 x 74.5 x 84.1 ± 1mm	3000	6525	44W	149	30°
286081 LenyknIL SM120/4000/44W/80/TB	1230 x 74.5 x 84.1 ± 1mm	4000	6800	44W	155	30°
286082 LenyknIL SM120/5000/44W/80/TB	1230 x 74.5 x 84.1 ± 1mm	5000	6985	44W	159	30°
286083 LenyknIL SM120/6500/44W/80/TB	1230 x 74.5 x 84.1 ± 1mm	6500	6800	44W	155	30°
286084 LenyknIL SM120/3000/44W/80/NB	1230 x 74.5 x 84.1 ± 1mm	3000	6480	44W	148	60°
286085 LenyknIL SM120/4000/44W/80/NB	1230 x 74.5 x 84.1 ± 1mm	4000	6750	44W	154	60°
286086 LenyknIL SM120/5000/44W/80/NB	1230 x 74.5 x 84.1 ± 1mm	5000	6935	44W	158	60°
286087 LenyknIL SM120/6500/44W/80/NB	1230 x 74.5 x 84.1 ± 1mm	6500	6750	44W	154	60°
286088 LenyknIL SM120/3000/44W/80/WB	1230 x 74.5 x 84.1 ± 1mm	3000	6505	44W	148	90°
286089 LenyknIL SM120/4000/44W/80/WB	1230 x 74.5 x 84.1 ± 1mm	4000	6780	44W	155	90°
286090 LenyknIL SM120/5000/44W/80/WB	1230 x 74.5 x 84.1 ± 1mm	5000	6965	44W	159	90°
286091 LenyknIL SM120/6500/44W/80/WB	1230 x 74.5 x 84.1 ± 1mm	6500	6780	44W	155	90°
286092 LenyknIL SM120/3000/44W/80/DA	1230 x 74.5 x 84.1 ± 1mm	3000	6480	44W	148	DA
286093 LenyknIL SM120/4000/44W/80/DA	1230 x 74.5 x 84.1 ± 1mm	4000	6750	44W	154	DA
286094 LenyknIL SM120/5000/44W/80/DA	1230 x 74.5 x 84.1 ± 1mm	5000	6935	44W	158	DA
286095 LenyknIL SM120/6500/44W/80/DA	1230 x 74.5 x 84.1 ± 1mm	6500	6750	44W	154	DA
286096 LenyknIL SM120/3000/44W/80/SA	1230 x 74.5 x 84.1 ± 1mm	3000	6210	44W	142	SA
286097 LenyknIL SM120/4000/44W/80/SA	1230 x 74.5 x 84.1 ± 1mm	4000	6475	44W	148	SA
286098 LenyknIL SM120/5000/44W/80/SA	1230 x 74.5 x 84.1 ± 1mm	5000	6650	44W	152	SA
286099 LenyknIL SM120/6500/44W/80/SA	1230 x 74.5 x 84.1 ± 1mm	6500	6475	44W	148	SA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
286100 LenyknIL SM120/3000/50W/80/TB	1230 x 74.5 x 84.1 ± 1mm	3000	8050	50W	161	30°
286101 LenyknIL SM120/4000/50W/80/TB	1230 x 74.5 x 84.1 ± 1mm	4000	8390	50W	168	30°
286102 LenyknIL SM120/5000/50W/80/TB	1230 x 74.5 x 84.1 ± 1mm	5000	8615	50W	173	30°
286103 LenyknIL SM120/6500/50W/80/TB	1230 x 74.5 x 84.1 ± 1mm	6500	8390	50W	168	30°
286104 LenyknIL SM120/3000/50W/80/NB	1230 x 74.5 x 84.1 ± 1mm	3000	7990	50W	160	60°
286105 LenyknIL SM120/4000/50W/80/NB	1230 x 74.5 x 84.1 ± 1mm	4000	8330	50W	167	60°
286106 LenyknIL SM120/5000/50W/80/NB	1230 x 74.5 x 84.1 ± 1mm	5000	8555	50W	172	60°
286107 LenyknIL SM120/6500/50W/80/NB	1230 x 74.5 x 84.1 ± 1mm	6500	8330	50W	167	60°
286108 LenyknIL SM120/3000/50W/80/WB	1230 x 74.5 x 84.1 ± 1mm	3000	8025	50W	161	90°
286109 LenyknIL SM120/4000/50W/80/WB	1230 x 74.5 x 84.1 ± 1mm	4000	8365	50W	168	90°
286110 LenyknIL SM120/5000/50W/80/WB	1230 x 74.5 x 84.1 ± 1mm	5000	8590	50W	172	90°
286111 LenyknIL SM120/6500/50W/80/WB	1230 x 74.5 x 84.1 ± 1mm	6500	8365	50W	168	90°
286112 LenyknIL SM120/3000/50W/80/DA	1230 x 74.5 x 84.1 ± 1mm	3000	7990	50W	160	DA
286113 LenyknIL SM120/4000/50W/80/DA	1230 x 74.5 x 84.1 ± 1mm	4000	8330	50W	167	DA
286114 LenyknIL SM120/5000/50W/80/DA	1230 x 74.5 x 84.1 ± 1mm	5000	8555	50W	172	DA
286115 LenyknIL SM120/6500/50W/80/DA	1230 x 74.5 x 84.1 ± 1mm	6500	8330	50W	167	DA
286116 LenyknIL SM120/3000/50W/80/SA	1230 x 74.5 x 84.1 ± 1mm	3000	7660	50W	154	SA
286117 LenyknIL SM120/4000/50W/80/SA	1230 x 74.5 x 84.1 ± 1mm	4000	7985	50W	160	SA
286118 LenyknIL SM120/5000/50W/80/SA	1230 x 74.5 x 84.1 ± 1mm	5000	8200	50W	164	SA
286119 LenyknIL SM120/6500/50W/80/SA	1230 x 74.5 x 84.1 ± 1mm	6500	7985	50W	160	SA
286280 LenyknIL SM150/3000/26W/80/TB	1527 x 74.5 x 84.1 ± 1mm	3000	4150	26W	160	30°
286281 LenyknIL SM150/4000/26W/80/TB	1527 x 74.5 x 84.1 ± 1mm	4000	4325	26W	167	30°
286282 LenyknIL SM150/5000/26W/80/TB	1527 x 74.5 x 84.1 ± 1mm	5000	4445	26W	171	30°
286283 LenyknIL SM150/6500/26W/80/TB	1527 x 74.5 x 84.1 ± 1mm	6500	4325	26W	167	30°
286284 LenyknIL SM150/3000/26W/80/NB	1527 x 74.5 x 84.1 ± 1mm	3000	4120	26W	159	60°
286285 LenyknIL SM150/4000/26W/80/NB	1527 x 74.5 x 84.1 ± 1mm	4000	4295	26W	166	60°
286286 LenyknIL SM150/5000/26W/80/NB	1527 x 74.5 x 84.1 ± 1mm	5000	4410	26W	170	60°
286287 LenyknIL SM150/6500/26W/80/NB	1527 x 74.5 x 84.1 ± 1mm	6500	4295	26W	166	60°
286288 LenyknIL SM150/3000/26W/80/WB	1527 x 74.5 x 84.1 ± 1mm	3000	4140	26W	160	90°
286289 LenyknIL SM150/4000/26W/80/WB	1527 x 74.5 x 84.1 ± 1mm	4000	4315	26W	166	90°
286290 LenyknIL SM150/5000/26W/80/WB	1527 x 74.5 x 84.1 ± 1mm	5000	4430	26W	171	90°
286291 LenyknIL SM150/6500/26W/80/WB	1527 x 74.5 x 84.1 ± 1mm	6500	4315	26W	166	90°
286292 LenyknIL SM150/3000/26W/80/DA	1527 x 74.5 x 84.1 ± 1mm	3000	4120	26W	159	DA
286293 LenyknIL SM150/4000/26W/80/DA	1527 x 74.5 x 84.1 ± 1mm	4000	4295	26W	166	DA
286294 LenyknIL SM150/5000/26W/80/DA	1527 x 74.5 x 84.1 ± 1mm	5000	4410	26W	170	DA
286295 LenyknIL SM150/6500/26W/80/DA	1527 x 74.5 x 84.1 ± 1mm	6500	4295	26W	166	DA
286296 LenyknIL SM150/3000/26W/80/SA	1527 x 74.5 x 84.1 ± 1mm	3000	3950	26W	152	SA
286297 LenyknIL SM150/4000/26W/80/SA	1527 x 74.5 x 84.1 ± 1mm	4000	4120	26W	159	SA
286298 LenyknIL SM150/5000/26W/80/SA	1527 x 74.5 x 84.1 ± 1mm	5000	4230	26W	163	SA
286299 LenyknIL SM150/6500/26W/80/SA	1527 x 74.5 x 84.1 ± 1mm	6500	4120	26W	159	SA
286300 LenyknIL SM150/3000/35W/80/TB	1527 x 74.5 x 84.1 ± 1mm	3000	5445	35W	156	30°
286301 LenyknIL SM150/4000/35W/80/TB	1527 x 74.5 x 84.1 ± 1mm	4000	5680	35W	163	30°
286302 LenyknIL SM150/5000/35W/80/TB	1527 x 74.5 x 84.1 ± 1mm	5000	5830	35W	167	30°
286303 LenyknIL SM150/6500/35W/80/TB	1527 x 74.5 x 84.1 ± 1mm	6500	5680	35W	163	30°
286304 LenyknIL SM150/3000/35W/80/NB	1527 x 74.5 x 84.1 ± 1mm	3000	5360	35W	154	60°
286305 LenyknIL SM150/4000/35W/80/NB	1527 x 74.5 x 84.1 ± 1mm	4000	5585	35W	160	60°
286306 LenyknIL SM150/5000/35W/80/NB	1527 x 74.5 x 84.1 ± 1mm	5000	5740	35W	164	60°
286307 LenyknIL SM150/6500/35W/80/NB	1527 x 74.5 x 84.1 ± 1mm	6500	5585	35W	160	60°
286308 LenyknIL SM150/3000/35W/80/WB	1527 x 74.5 x 84.1 ± 1mm	3000	5385	35W	154	90°
286309 LenyknIL SM150/4000/35W/80/WB	1527 x 74.5 x 84.1 ± 1mm	4000	5610	35W	161	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
286310 LenyknIL SM150/5000/35W/80/WB	1527 x 74.5 x 84.1 ± 1mm	5000	5765	35W	165	90°
286311 LenyknIL SM150/6500/35W/80/WB	1527 x 74.5 x 84.1 ± 1mm	6500	5610	35W	161	90°
286312 LenyknIL SM150/3000/35W/80/DA	1527 x 74.5 x 84.1 ± 1mm	3000	5360	35W	154	DA
286313 LenyknIL SM150/4000/35W/80/DA	1527 x 74.5 x 84.1 ± 1mm	4000	5585	35W	160	DA
286314 LenyknIL SM150/5000/35W/80/DA	1527 x 74.5 x 84.1 ± 1mm	5000	5740	35W	164	DA
286315 LenyknIL SM150/6500/35W/80/DA	1527 x 74.5 x 84.1 ± 1mm	6500	5585	35W	160	DA
286316 LenyknIL SM150/3000/35W/80/SA	1527 x 74.5 x 84.1 ± 1mm	3000	5115	35W	147	SA
286317 LenyknIL SM150/4000/35W/80/SA	1527 x 74.5 x 84.1 ± 1mm	4000	5335	35W	153	SA
286318 LenyknIL SM150/5000/35W/80/SA	1527 x 74.5 x 84.1 ± 1mm	5000	5480	35W	157	SA
286319 LenyknIL SM150/6500/35W/80/SA	1527 x 74.5 x 84.1 ± 1mm	6500	5335	35W	153	SA
286320 LenyknIL SM150/3000/45W/80/TB	1527 x 74.5 x 84.1 ± 1mm	3000	6905	45W	154	30°
286321 LenyknIL SM150/4000/45W/80/TB	1527 x 74.5 x 84.1 ± 1mm	4000	7195	45W	160	30°
286322 LenyknIL SM150/5000/45W/80/TB	1527 x 74.5 x 84.1 ± 1mm	5000	7390	45W	165	30°
286323 LenyknIL SM150/6500/45W/80/TB	1527 x 74.5 x 84.1 ± 1mm	6500	7195	45W	160	30°
286324 LenyknIL SM150/3000/45W/80/NB	1527 x 74.5 x 84.1 ± 1mm	3000	6795	45W	151	60°
286325 LenyknIL SM150/4000/45W/80/NB	1527 x 74.5 x 84.1 ± 1mm	4000	7080	45W	158	60°
286326 LenyknIL SM150/5000/45W/80/NB	1527 x 74.5 x 84.1 ± 1mm	5000	7275	45W	162	60°
286327 LenyknIL SM150/6500/45W/80/NB	1527 x 74.5 x 84.1 ± 1mm	6500	7080	45W	158	60°
286328 LenyknIL SM150/3000/45W/80/WB	1527 x 74.5 x 84.1 ± 1mm	3000	6825	45W	152	90°
286329 LenyknIL SM150/4000/45W/80/WB	1527 x 74.5 x 84.1 ± 1mm	4000	7115	45W	159	90°
286330 LenyknIL SM150/5000/45W/80/WB	1527 x 74.5 x 84.1 ± 1mm	5000	7305	45W	163	90°
286331 LenyknIL SM150/6500/45W/80/WB	1527 x 74.5 x 84.1 ± 1mm	6500	7115	45W	159	90°
286332 LenyknIL SM150/3000/45W/80/DA	1527 x 74.5 x 84.1 ± 1mm	3000	6795	45W	151	DA
286333 LenyknIL SM150/4000/45W/80/DA	1527 x 74.5 x 84.1 ± 1mm	4000	7080	45W	158	DA
286334 LenyknIL SM150/5000/45W/80/DA	1527 x 74.5 x 84.1 ± 1mm	5000	7275	45W	162	DA
286335 LenyknIL SM150/6500/45W/80/DA	1527 x 74.5 x 84.1 ± 1mm	6500	7080	45W	158	DA
286336 LenyknIL SM150/3000/45W/80/SA	1527 x 74.5 x 84.1 ± 1mm	3000	6485	45W	145	SA
286337 LenyknIL SM150/4000/45W/80/SA	1527 x 74.5 x 84.1 ± 1mm	4000	6760	45W	151	SA
286338 LenyknIL SM150/5000/45W/80/SA	1527 x 74.5 x 84.1 ± 1mm	5000	6945	45W	155	SA
286339 LenyknIL SM150/6500/45W/80/SA	1527 x 74.5 x 84.1 ± 1mm	6500	6760	45W	151	SA
286340 LenyknIL SM150/3000/53W/80/TB	1527 x 74.5 x 84.1 ± 1mm	3000	7785	53W	147	30°
286341 LenyknIL SM150/4000/53W/80/TB	1527 x 74.5 x 84.1 ± 1mm	4000	8115	53W	154	30°
286342 LenyknIL SM150/5000/53W/80/TB	1527 x 74.5 x 84.1 ± 1mm	5000	8335	53W	158	30°
286343 LenyknIL SM150/6500/53W/80/TB	1527 x 74.5 x 84.1 ± 1mm	6500	8115	53W	154	30°
286344 LenyknIL SM150/3000/53W/80/NB	1527 x 74.5 x 84.1 ± 1mm	3000	7665	53W	145	60°
286345 LenyknIL SM150/4000/53W/80/NB	1527 x 74.5 x 84.1 ± 1mm	4000	7985	53W	151	60°
286346 LenyknIL SM150/5000/53W/80/NB	1527 x 74.5 x 84.1 ± 1mm	5000	8200	53W	155	60°
286347 LenyknIL SM150/6500/53W/80/NB	1527 x 74.5 x 84.1 ± 1mm	6500	7985	53W	151	60°
286348 LenyknIL SM150/3000/53W/80/WB	1527 x 74.5 x 84.1 ± 1mm	3000	7695	53W	146	90°
286349 LenyknIL SM150/4000/53W/80/WB	1527 x 74.5 x 84.1 ± 1mm	4000	8020	53W	152	90°
286350 LenyknIL SM150/5000/53W/80/WB	1527 x 74.5 x 84.1 ± 1mm	5000	8240	53W	156	90°
286351 LenyknIL SM150/6500/53W/80/WB	1527 x 74.5 x 84.1 ± 1mm	6500	8020	53W	152	90°
286352 LenyknIL SM150/3000/53W/80/DA	1527 x 74.5 x 84.1 ± 1mm	3000	7665	53W	145	DA
286353 LenyknIL SM150/4000/53W/80/DA	1527 x 74.5 x 84.1 ± 1mm	4000	7985	53W	151	DA
286354 LenyknIL SM150/5000/53W/80/DA	1527 x 74.5 x 84.1 ± 1mm	5000	8200	53W	155	DA
286355 LenyknIL SM150/6500/53W/80/DA	1527 x 74.5 x 84.1 ± 1mm	6500	7985	53W	151	DA
286356 LenyknIL SM150/3000/53W/80/SA	1527 x 74.5 x 84.1 ± 1mm	3000	7315	53W	139	SA
286357 LenyknIL SM150/4000/53W/80/SA	1527 x 74.5 x 84.1 ± 1mm	4000	7625	53W	144	SA
286358 LenyknIL SM150/5000/53W/80/SA	1527 x 74.5 x 84.1 ± 1mm	5000	7830	53W	148	SA
286359 LenyknIL SM150/6500/53W/80/SA	1527 x 74.5 x 84.1 ± 1mm	6500	7625	53W	144	SA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
286360 LenyknIL SM150/3000/62W/80/TB	1527 x 74.5 x 84.1 ± 1mm	3000	9085	62W	147	30°
286361 LenyknIL SM150/4000/62W/80/TB	1527 x 74.5 x 84.1 ± 1mm	4000	9470	62W	153	30°
286362 LenyknIL SM150/5000/62W/80/TB	1527 x 74.5 x 84.1 ± 1mm	5000	9725	62W	157	30°
286363 LenyknIL SM150/6500/62W/80/TB	1527 x 74.5 x 84.1 ± 1mm	6500	9470	62W	153	30°
286364 LenyknIL SM150/3000/62W/80/NB	1527 x 74.5 x 84.1 ± 1mm	3000	9020	62W	146	60°
286365 LenyknIL SM150/4000/62W/80/NB	1527 x 74.5 x 84.1 ± 1mm	4000	9400	62W	152	60°
286366 LenyknIL SM150/5000/62W/80/NB	1527 x 74.5 x 84.1 ± 1mm	5000	9655	62W	156	60°
286367 LenyknIL SM150/6500/62W/80/NB	1527 x 74.5 x 84.1 ± 1mm	6500	9400	62W	152	60°
286368 LenyknIL SM150/3000/62W/80/WB	1527 x 74.5 x 84.1 ± 1mm	3000	9060	62W	147	90°
286369 LenyknIL SM150/4000/62W/80/WB	1527 x 74.5 x 84.1 ± 1mm	4000	9440	62W	153	90°
286370 LenyknIL SM150/5000/62W/80/WB	1527 x 74.5 x 84.1 ± 1mm	5000	9695	62W	157	90°
286371 LenyknIL SM150/6500/62W/80/WB	1527 x 74.5 x 84.1 ± 1mm	6500	9440	62W	153	90°
286372 LenyknIL SM150/3000/62W/80/DA	1527 x 74.5 x 84.1 ± 1mm	3000	9020	62W	146	DA
286373 LenyknIL SM150/4000/62W/80/DA	1527 x 74.5 x 84.1 ± 1mm	4000	9400	62W	152	DA
286374 LenyknIL SM150/5000/62W/80/DA	1527 x 74.5 x 84.1 ± 1mm	5000	9655	62W	156	DA
286375 LenyknIL SM150/6500/62W/80/DA	1527 x 74.5 x 84.1 ± 1mm	6500	9400	62W	152	DA
286376 LenyknIL SM150/3000/62W/80/SA	1527 x 74.5 x 84.1 ± 1mm	3000	8650	62W	140	SA
286377 LenyknIL SM150/4000/62W/80/SA	1527 x 74.5 x 84.1 ± 1mm	4000	9015	62W	146	SA
286378 LenyknIL SM150/5000/62W/80/SA	1527 x 74.5 x 84.1 ± 1mm	5000	9260	62W	150	SA
286379 LenyknIL SM150/6500/62W/80/SA	1527 x 74.5 x 84.1 ± 1mm	6500	9015	62W	146	SA