

Lenyk N IL TRK

TRACK LINEARS | DALI SERIES

A sleek track-mounted luminaire that delivers uniform lighting for industrial and retail applications. It can be mounted in continuous rows for an impressive effect. The luminaire has a new and modern aluminium housing, while featuring very high efficiency (171 lm/W). It delivers high lighting quality and comes equipped with a wide range of beam angles, from the narrowest to the widest. Lenyk N IL TRK also features double and simple-asymmetric beams for a perfect spread of light across the shelves without wasting it on the corridors.

Lenyk N IL TRK has several series, determined by various add-on and controls:


- Lenyk N IL TRK Non-DALI: the standard for industrial, DIY and retail spaces
- Lenyk N IL TRK DALI: with DALI dimming

FEATURES & BENEFITS

- CRI \geq 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: WB (Wide Beam - 90°), NB (Narrow Beam - 60°), TB (Tight Beam - 30°), DA (Double Asymmetric) and SA (Simple Asymmetric)

APPLICATION

Grocery & Supermarkets | Retail | DIY

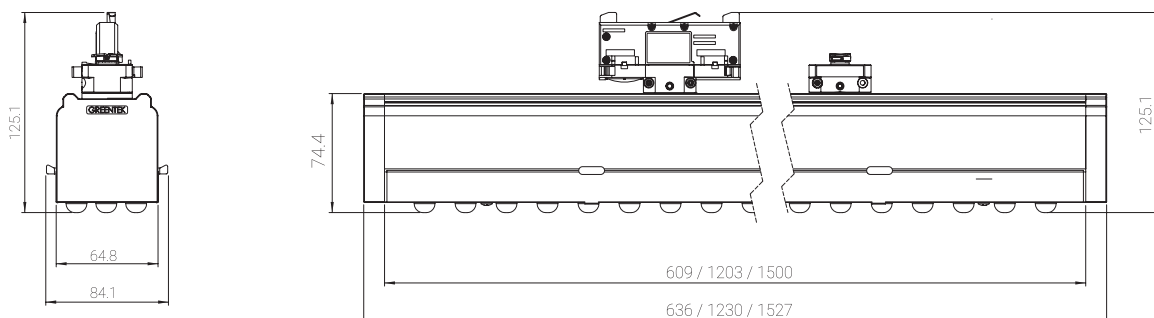


SPECIFICATIONS

Power consumption	12W, 20W	21W, 37W, 44W, 50W	26W, 35W, 45W, 53W, 62W
Dimensions	636 x 125.1 x 84.1 ± 1mm	1230 x 125.1 x 84.1 ± 1mm	1527 x 125.1 x 84.1 ± 1mm
Weight	2 Kg	2.7 Kg	3.1 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA, SA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

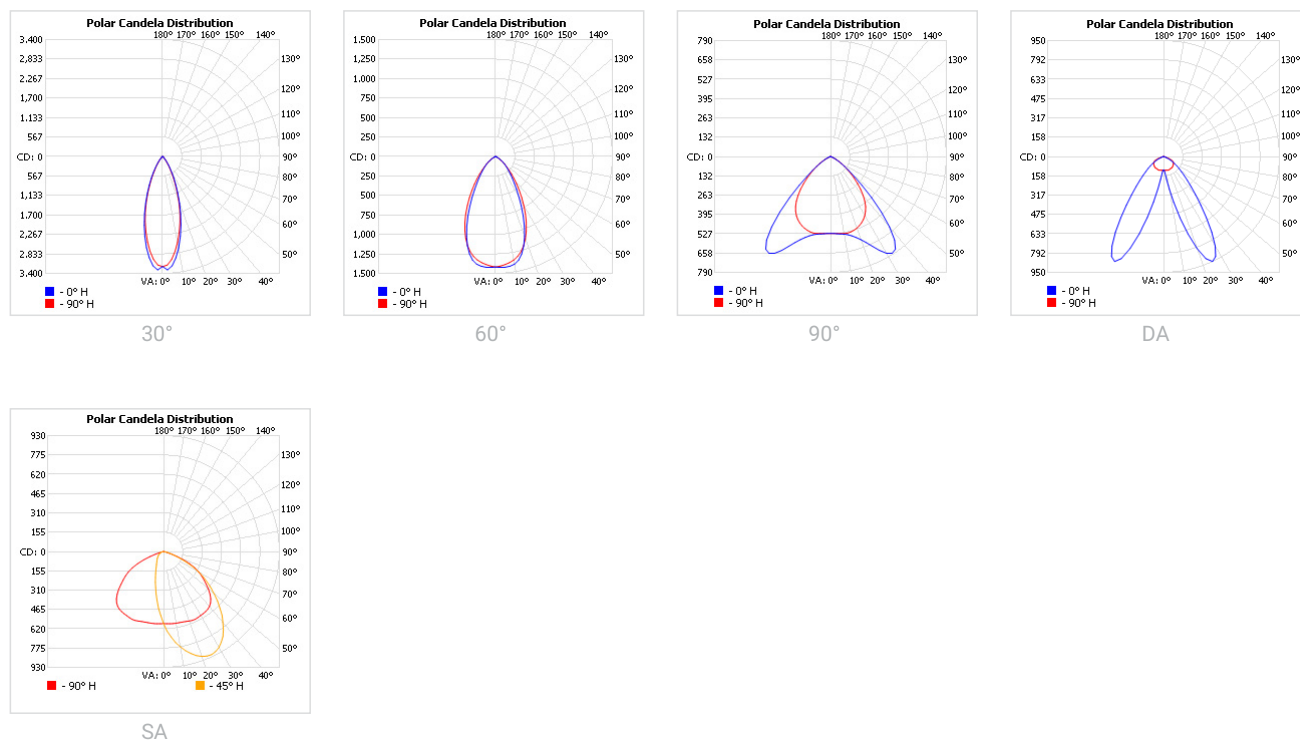

TOLERANCES**Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power [W]	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
<50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
<80W	DALI	27	21	13	45	35	21

RISK GROUP**Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)	
CRI 80							
290000	LenykNIL TRK60/3000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	3000	1740	12W	12W	30°
290001	LenykNIL TRK60/4000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	4000	1810	12W	12W	30°
290002	LenykNIL TRK60/5000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	5000	1860	12W	12W	30°
290003	LenykNIL TRK60/6500/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	6500	1810	12W	12W	30°
290004	LenykNIL TRK60/3000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	3000	1725	12W	12W	60°
290005	LenykNIL TRK60/4000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	4000	1800	12W	12W	60°
290006	LenykNIL TRK60/5000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	5000	1845	12W	12W	60°
290007	LenykNIL TRK60/6500/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	6500	1800	12W	12W	60°
290008	LenykNIL TRK60/3000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	3000	1735	12W	12W	90°
290009	LenykNIL TRK60/4000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	4000	1805	12W	12W	90°
290010	LenykNIL TRK60/5000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	5000	1855	12W	12W	90°
290011	LenykNIL TRK60/6500/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	6500	1805	12W	12W	90°
290012	LenykNIL TRK60/3000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	3000	1725	12W	12W	DA
290013	LenykNIL TRK60/4000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	4000	1800	12W	12W	DA
290014	LenykNIL TRK60/5000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	5000	1845	12W	12W	DA
290015	LenykNIL TRK60/6500/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	6500	1800	12W	12W	DA
290016	LenykNIL TRK60/3000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	3000	1655	12W	12W	SA
290017	LenykNIL TRK60/4000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	4000	1725	12W	12W	SA
290018	LenykNIL TRK60/5000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	5000	1770	12W	12W	SA
290019	LenykNIL TRK60/6500/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	6500	1725	12W	12W	SA
290020	LenykNIL TRK60/3000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	3000	2895	20W	20W	30°
290021	LenykNIL TRK60/4000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	4000	3020	20W	20W	30°
290022	LenykNIL TRK60/5000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	5000	3100	20W	20W	30°
290023	LenykNIL TRK60/6500/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	6500	3020	20W	20W	30°
290024	LenykNIL TRK60/3000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	3000	2875	20W	20W	60°
290025	LenykNIL TRK60/4000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	4000	2995	20W	20W	60°
290026	LenykNIL TRK60/5000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	5000	3075	20W	20W	60°
290027	LenykNIL TRK60/6500/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	6500	2995	20W	20W	60°
290028	LenykNIL TRK60/3000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	3000	2890	20W	20W	90°
290029	LenykNIL TRK60/4000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	4000	3010	20W	20W	90°
290030	LenykNIL TRK60/5000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	5000	3090	20W	20W	90°
290031	LenykNIL TRK60/6500/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	6500	3010	20W	20W	90°
290032	LenykNIL TRK60/3000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	3000	2875	20W	20W	DA
290033	LenykNIL TRK60/4000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	4000	2995	20W	20W	DA
290034	LenykNIL TRK60/5000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	5000	3075	20W	20W	DA
290035	LenykNIL TRK60/6500/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	6500	2995	20W	20W	DA
290036	LenykNIL TRK60/3000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	3000	2755	20W	20W	SA
290037	LenykNIL TRK60/4000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	4000	2875	20W	20W	SA
290038	LenykNIL TRK60/5000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	5000	2950	20W	20W	SA
290039	LenykNIL TRK60/6500/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	6500	2875	20W	20W	SA
290040	LenykNIL TRK120/3000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	3445	21W	21W	30°
290041	LenykNIL TRK120/4000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	3590	21W	21W	30°
290042	LenykNIL TRK120/5000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	3685	21W	21W	30°
290043	LenykNIL TRK120/6500/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	3590	21W	21W	30°
290044	LenykNIL TRK120/3000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	3420	21W	21W	60°
290045	LenykNIL TRK120/4000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	3565	21W	21W	60°
290046	LenykNIL TRK120/5000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	3660	21W	21W	60°
290047	LenykNIL TRK120/6500/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	3565	21W	21W	60°
290048	LenykNIL TRK120/3000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	3435	21W	21W	90°
290049	LenykNIL TRK120/4000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	3580	21W	21W	90°
290050	LenykNIL TRK120/5000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	3675	21W	21W	90°
290051	LenykNIL TRK120/6500/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	3580	21W	21W	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290052 LenykNIL TRK120/3000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	3420	21W	21W	DA
290053 LenykNIL TRK120/4000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	3565	21W	21W	DA
290054 LenykNIL TRK120/5000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	3660	21W	21W	DA
290055 LenykNIL TRK120/6500/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	3565	21W	21W	DA
290056 LenykNIL TRK120/3000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	3280	21W	21W	SA
290057 LenykNIL TRK120/4000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	3415	21W	21W	SA
290058 LenykNIL TRK120/5000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	3510	21W	21W	SA
290059 LenykNIL TRK120/6500/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	3415	21W	21W	SA
290060 LenykNIL TRK120/3000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	5615	37W	37W	30°
290061 LenykNIL TRK120/4000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	5850	37W	37W	30°
290062 LenykNIL TRK120/5000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	6010	37W	37W	30°
290063 LenykNIL TRK120/6500/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	5850	37W	37W	30°
290064 LenykNIL TRK120/3000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	5575	37W	37W	60°
290065 LenykNIL TRK120/4000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	5810	37W	37W	60°
290066 LenykNIL TRK120/5000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	5965	37W	37W	60°
290067 LenykNIL TRK120/6500/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	5810	37W	37W	60°
290068 LenykNIL TRK120/3000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	5600	37W	37W	90°
290069 LenykNIL TRK120/4000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	5835	37W	37W	90°
290070 LenykNIL TRK120/5000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	5995	37W	37W	90°
290071 LenykNIL TRK120/6500/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	5835	37W	37W	90°
290072 LenykNIL TRK120/3000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	5575	37W	37W	DA
290073 LenykNIL TRK120/4000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	5810	37W	37W	DA
290074 LenykNIL TRK120/5000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	5965	37W	37W	DA
290075 LenykNIL TRK120/6500/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	5810	37W	37W	DA
290076 LenykNIL TRK120/3000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	5345	37W	37W	SA
290077 LenykNIL TRK120/4000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	5570	37W	37W	SA
290078 LenykNIL TRK120/5000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	5720	37W	37W	SA
290079 LenykNIL TRK120/6500/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	5570	37W	37W	SA
290080 LenykNIL TRK120/3000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	6525	44W	44W	30°
290081 LenykNIL TRK120/4000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	6800	44W	44W	30°
290082 LenykNIL TRK120/5000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	6985	44W	44W	30°
290083 LenykNIL TRK120/6500/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	6800	44W	44W	30°
290084 LenykNIL TRK120/3000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	6480	44W	44W	60°
290085 LenykNIL TRK120/4000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	6750	44W	44W	60°
290086 LenykNIL TRK120/5000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	6935	44W	44W	60°
290087 LenykNIL TRK120/6500/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	6750	44W	44W	60°
290088 LenykNIL TRK120/3000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	6505	44W	44W	90°
290089 LenykNIL TRK120/4000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	6780	44W	44W	90°
290090 LenykNIL TRK120/5000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	6965	44W	44W	90°
290091 LenykNIL TRK120/6500/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	6780	44W	44W	90°
290092 LenykNIL TRK120/3000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	6480	44W	44W	DA
290093 LenykNIL TRK120/4000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	6750	44W	44W	DA
290094 LenykNIL TRK120/5000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	6935	44W	44W	DA
290095 LenykNIL TRK120/6500/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	6750	44W	44W	DA
290096 LenykNIL TRK120/3000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	6210	44W	44W	SA
290097 LenykNIL TRK120/4000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	6475	44W	44W	SA
290098 LenykNIL TRK120/5000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	6650	44W	44W	SA
290099 LenykNIL TRK120/6500/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	6475	44W	44W	SA
290100 LenykNIL TRK120/3000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	8050	50W	50W	30°
290101 LenykNIL TRK120/4000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	8390	50W	50W	30°
290102 LenykNIL TRK120/5000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	8615	50W	50W	30°
290103 LenykNIL TRK120/6500/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	8390	50W	50W	30°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290104 LenyknIL TRK120/3000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	7990	50W	50W	60°
290105 LenyknIL TRK120/4000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	8330	50W	50W	60°
290106 LenyknIL TRK120/5000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	8555	50W	50W	60°
290107 LenyknIL TRK120/6500/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	8330	50W	50W	60°
290108 LenyknIL TRK120/3000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	8025	50W	50W	90°
290109 LenyknIL TRK120/4000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	8365	50W	50W	90°
290110 LenyknIL TRK120/5000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	8590	50W	50W	90°
290111 LenyknIL TRK120/6500/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	8365	50W	50W	90°
290112 LenyknIL TRK120/3000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	7990	50W	50W	DA
290113 LenyknIL TRK120/4000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	8330	50W	50W	DA
290114 LenyknIL TRK120/5000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	8555	50W	50W	DA
290115 LenyknIL TRK120/6500/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	8330	50W	50W	DA
290116 LenyknIL TRK120/3000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	7660	50W	50W	SA
290117 LenyknIL TRK120/4000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	7985	50W	50W	SA
290118 LenyknIL TRK120/5000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	8200	50W	50W	SA
290119 LenyknIL TRK120/6500/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	7985	50W	50W	SA
290120 LenyknIL TRK150/3000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	4150	26W	26W	30°
290121 LenyknIL TRK150/4000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	4325	26W	26W	30°
290122 LenyknIL TRK150/5000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	4445	26W	26W	30°
290123 LenyknIL TRK150/6500/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	4325	26W	26W	30°
290124 LenyknIL TRK150/3000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	4120	26W	26W	60°
290125 LenyknIL TRK150/4000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	4295	26W	26W	60°
290126 LenyknIL TRK150/5000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	4410	26W	26W	60°
290127 LenyknIL TRK150/6500/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	4295	26W	26W	60°
290128 LenyknIL TRK150/3000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	4140	26W	26W	90°
290129 LenyknIL TRK150/4000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	4315	26W	26W	90°
290130 LenyknIL TRK150/5000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	4430	26W	26W	90°
290131 LenyknIL TRK150/6500/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	4315	26W	26W	90°
290132 LenyknIL TRK150/3000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	4120	26W	26W	DA
290133 LenyknIL TRK150/4000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	4295	26W	26W	DA
290134 LenyknIL TRK150/5000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	4410	26W	26W	DA
290135 LenyknIL TRK150/6500/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	4295	26W	26W	DA
290136 LenyknIL TRK150/3000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	3950	26W	26W	SA
290137 LenyknIL TRK150/4000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	4120	26W	26W	SA
290138 LenyknIL TRK150/5000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	4230	26W	26W	SA
290139 LenyknIL TRK150/6500/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	4120	26W	26W	SA
290140 LenyknIL TRK150/3000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	5445	35W	35W	30°
290141 LenyknIL TRK150/4000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	5680	35W	35W	30°
290142 LenyknIL TRK150/5000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	5830	35W	35W	30°
290143 LenyknIL TRK150/6500/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	5680	35W	35W	30°
290144 LenyknIL TRK150/3000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	5360	35W	35W	60°
290145 LenyknIL TRK150/4000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	5585	35W	35W	60°
290146 LenyknIL TRK150/5000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	5740	35W	35W	60°
290147 LenyknIL TRK150/6500/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	5585	35W	35W	60°
290148 LenyknIL TRK150/3000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	5385	35W	35W	90°
290149 LenyknIL TRK150/4000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	5610	35W	35W	90°
290150 LenyknIL TRK150/5000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	5765	35W	35W	90°
290151 LenyknIL TRK150/6500/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	5610	35W	35W	90°
290152 LenyknIL TRK150/3000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	5360	35W	35W	DA
290153 LenyknIL TRK150/4000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	5585	35W	35W	DA
290154 LenyknIL TRK150/5000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	5740	35W	35W	DA
290155 LenyknIL TRK150/6500/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	5585	35W	35W	DA

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290156 LenykNIL TRK150/3000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	5115	35W	35W	SA
290157 LenykNIL TRK150/4000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	5335	35W	35W	SA
290158 LenykNIL TRK150/5000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	5480	35W	35W	SA
290159 LenykNIL TRK150/6500/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	5335	35W	35W	SA
290160 LenykNIL TRK150/3000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	6905	45W	45W	30°
290161 LenykNIL TRK150/4000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	7195	45W	45W	30°
290162 LenykNIL TRK150/5000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	7390	45W	45W	30°
290163 LenykNIL TRK150/6500/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	7195	45W	45W	30°
290164 LenykNIL TRK150/3000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	6795	45W	45W	60°
290165 LenykNIL TRK150/4000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	7080	45W	45W	60°
290166 LenykNIL TRK150/5000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	7275	45W	45W	60°
290167 LenykNIL TRK150/6500/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	7080	45W	45W	60°
290168 LenykNIL TRK150/3000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	6825	45W	45W	90°
290169 LenykNIL TRK150/4000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	7115	45W	45W	90°
290170 LenykNIL TRK150/5000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	7305	45W	45W	90°
290171 LenykNIL TRK150/6500/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	7115	45W	45W	90°
290172 LenykNIL TRK150/3000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	6795	45W	45W	DA
290173 LenykNIL TRK150/4000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	7080	45W	45W	DA
290174 LenykNIL TRK150/5000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	7275	45W	45W	DA
290175 LenykNIL TRK150/6500/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	7080	45W	45W	DA
290176 LenykNIL TRK150/3000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	6485	45W	45W	SA
290177 LenykNIL TRK150/4000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	6760	45W	45W	SA
290178 LenykNIL TRK150/5000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	6945	45W	45W	SA
290179 LenykNIL TRK150/6500/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	6760	45W	45W	SA
290180 LenykNIL TRK150/3000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	7785	53W	53W	30°
290181 LenykNIL TRK150/4000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	8115	53W	53W	30°
290182 LenykNIL TRK150/5000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	8335	53W	53W	30°
290183 LenykNIL TRK150/6500/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	8115	53W	53W	30°
290184 LenykNIL TRK150/3000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	7665	53W	53W	60°
290185 LenykNIL TRK150/4000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	7985	53W	53W	60°
290186 LenykNIL TRK150/5000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	8200	53W	53W	60°
290187 LenykNIL TRK150/6500/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	7985	53W	53W	60°
290188 LenykNIL TRK150/3000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	7695	53W	53W	90°
290189 LenykNIL TRK150/4000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	8020	53W	53W	90°
290190 LenykNIL TRK150/5000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	8240	53W	53W	90°
290191 LenykNIL TRK150/6500/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	8020	53W	53W	90°
290192 LenykNIL TRK150/3000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	7665	53W	53W	DA
290193 LenykNIL TRK150/4000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	7985	53W	53W	DA
290194 LenykNIL TRK150/5000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	8200	53W	53W	DA
290195 LenykNIL TRK150/6500/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	7985	53W	53W	DA
290196 LenykNIL TRK150/3000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	7315	53W	53W	SA
290197 LenykNIL TRK150/4000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	7625	53W	53W	SA
290198 LenykNIL TRK150/5000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	7830	53W	53W	SA
290199 LenykNIL TRK150/6500/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	7625	53W	53W	SA
290200 LenykNIL TRK150/3000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	9085	62W	62W	30°
290201 LenykNIL TRK150/4000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	9470	62W	62W	30°
290202 LenykNIL TRK150/5000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	9725	62W	62W	30°
290203 LenykNIL TRK150/6500/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	9470	62W	62W	30°
290204 LenykNIL TRK150/3000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	9020	62W	62W	60°
290205 LenykNIL TRK150/4000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	9400	62W	62W	60°
290206 LenykNIL TRK150/5000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	9655	62W	62W	60°
290207 LenykNIL TRK150/6500/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	9400	62W	62W	60°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
290208 LenykNIL TRK150/3000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	9060	62W	62W	90°
290209 LenykNIL TRK150/4000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	9440	62W	62W	90°
290210 LenykNIL TRK150/5000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	9695	62W	62W	90°
290211 LenykNIL TRK150/6500/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	9440	62W	62W	90°
290212 LenykNIL TRK150/3000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	9020	62W	62W	DA
290213 LenykNIL TRK150/4000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	9400	62W	62W	DA
290214 LenykNIL TRK150/5000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	9655	62W	62W	DA
290215 LenykNIL TRK150/6500/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	9400	62W	62W	DA
290216 LenykNIL TRK150/3000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	8650	62W	62W	SA
290217 LenykNIL TRK150/4000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	9015	62W	62W	SA
290218 LenykNIL TRK150/5000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	9260	62W	62W	SA
290219 LenykNIL TRK150/6500/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	9015	62W	62W	SA