



## Orsini2

### TRACK SPOTLIGHT | NON-DALI SERIES

A flexible and adjustable spotlight that emphasizes areas in your store or gallery. The spotlight will answer your requirements through simple and efficient design that offers an adjustable light beam angle between 20° and 26° for directional and accent lighting.

Orsini2 has several series, determined by various add-on and controls:


- Orsini Non-DALI: the standard version
- Orsini DALI – with DALI controls for illumination adjustments

### FEATURES & BENEFITS

- CRI 90 as standard
- Color temperatures: 3000K
- Angle: adjustable ( 20° and 26° )

### APPLICATION

Grocery & Supermarket | Retail | Art & Exhibition

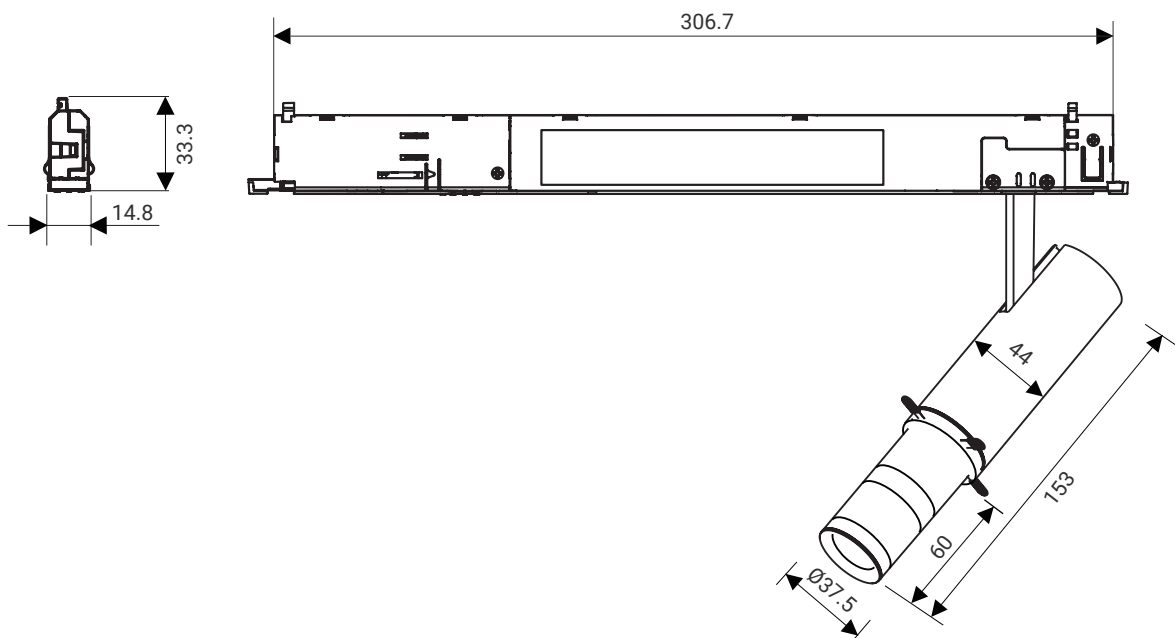


**SPECIFICATIONS**

Power consumption	10W
Dimensions	Ø44x143±1mm
Weight	0.40 Kg
Housing materials	Aluminium, Glass
Protection class	Safety class II
Power factor	>0.9
Operating temperature [°C]	+5°C ... +35°C
AC Input [Vac]	220 - 240 VAC
Lens angle [°]	AVAR (20° to 26°)
Lifespan [h]	50.000
Housing color	○ - White, ● - Black,
Lumen maintenance	L90/B10@50.000h at 25°C
IP factor	IP20
Control optional	-
Warranty [years]	5


#	Standard
CRI	CRI 90
CCT [K]	3000K
MacAdam	3

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency


**PHOTOMETRY**

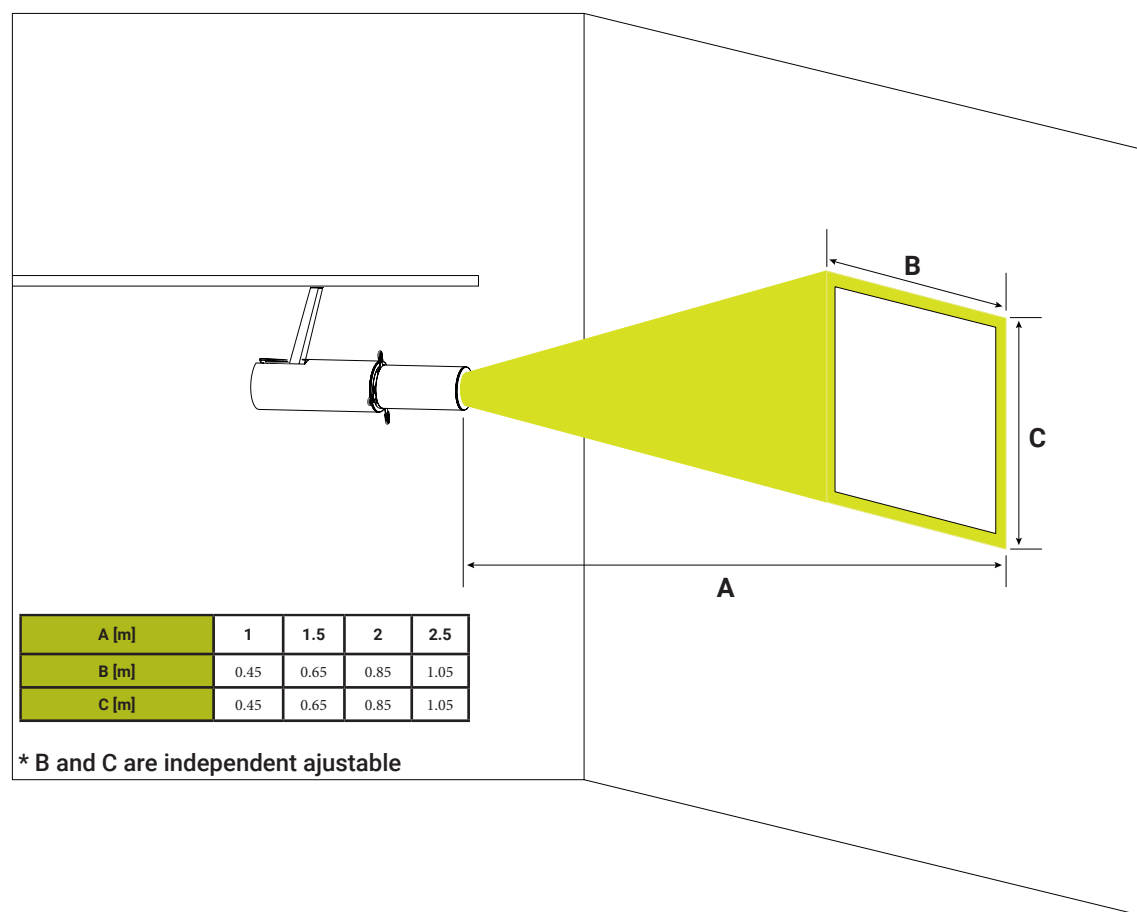

\* B and C are independent adjustable

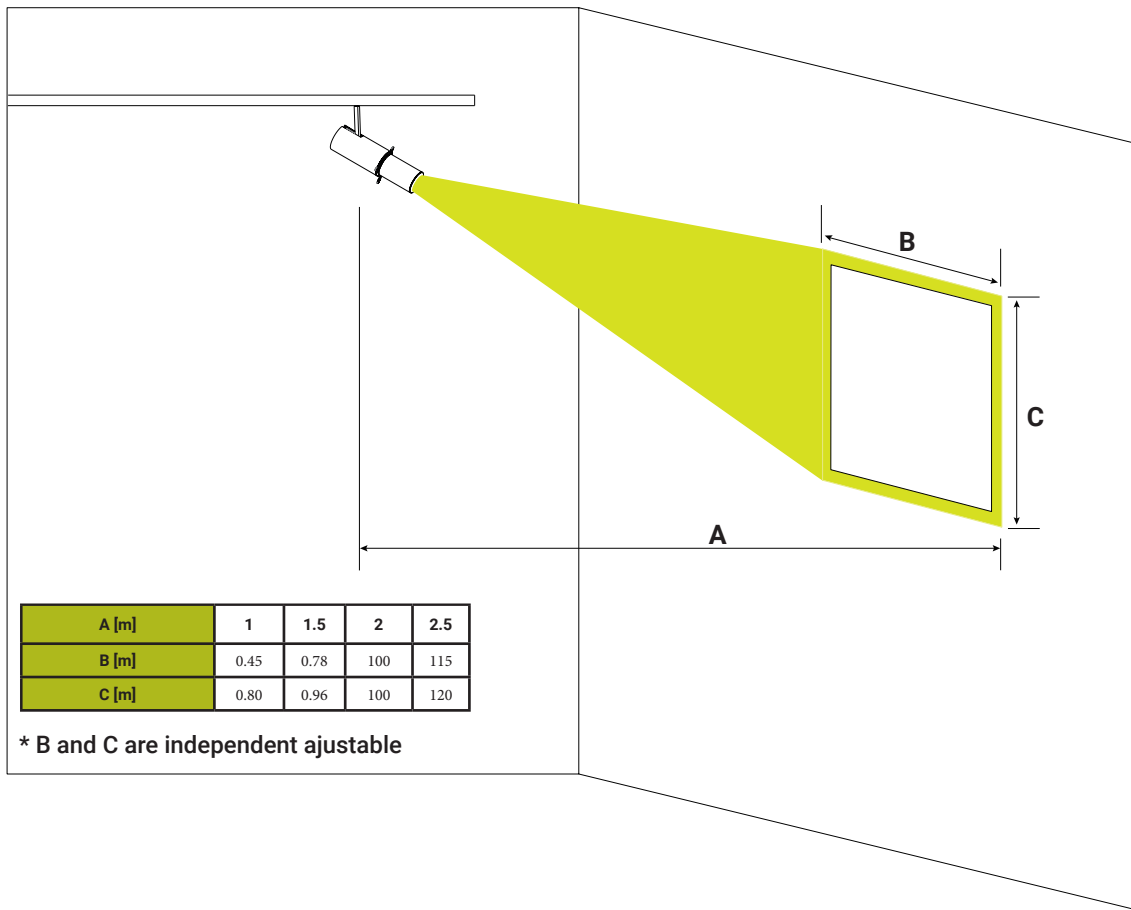

LIGHT DISTRIBUTION



SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 90</b>						
1D7ES185 Orsini2 S34833/AVAR/10W/3000K/90	Ø44x143±1mm	3000K	350	10W	35	AVAR

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting. The presentation picture is for information purposes only. Latest document update: August 9, 2024 11:33 AM. [www.greentek.eu](http://www.greentek.eu)