

## Zephyr Line 1000

### DIRECTED DIFFUSION LIGHTING | DALI SERIES

• Zephyr Line 1000 is a sleek and modern pendant light that features a linear design, making it an ideal choice for creating a continuous and uniform lighting experience. Its elongated form ensures an even distribution of light, effectively reducing harsh shadows and providing a gentle brightness that enhances any environment.


• The minimalist yet impactful design of the Zephyr Line 1000 complements various interior styles. This luminaire combines aesthetic elegance with practical functionality, delivering a balanced and refined illumination that enhances the ambiance without overpowering the space.

### FEATURES & BENEFITS

- Lumen maintenance L90/B10@50.000h at 25°C
- IP45
- 5 years warranty
- CRI90 as standard
- Efficiency@4000K - 66 lm/W

### APPLICATION


Grocery & Supermarkets | Retail | Office | Healthcare | Hospitality | DIY | Home

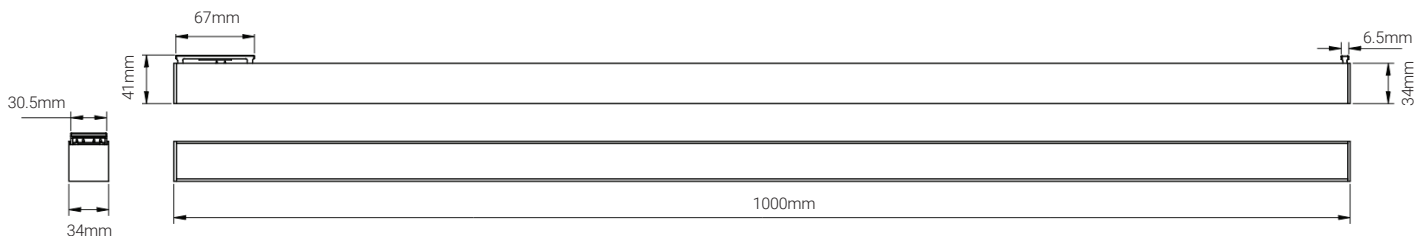

**SPECIFICATIONS**

Power consumption	30W
Dimensions	1000 x 38 x 38 ±1mm
Housing materials	Aluminium, Acrylic
IK code	IK07
THD (at 230V, 50Hz, Full load)	-
Protection class	Safety class 1
Operating temperature [°C]	-20C...+45C/-4F...+113F
Operating humidity [%]	10 ÷ 85
Power factor	-
DC Input [Vdc]	24 Vdc
Lens angle [°]	110°
Lifespan [h]	50000h
Housing color	● Black NCS 9000-N ● Terra red NCS S 4040-Y70R ● Green NCS S 6005-G80Y ● White NCS 0502-G
Lumen maintenance	L90/B10@50.000h at 25°C
IP factor	IP45
Control optional	-
Warranty [years]	5
Storage temperature range [°C]	-20 ÷ +55

**LIGHT DISTRIBUTION**



110°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI90</b>						
1G6000 Zephyr Line 1000/2700/30W/90/B	1000x38x38±1mm	2700	1980	30W	66	A110
1G6001 Zephyr Line 1000/2700/30W/90/R	1000x38x38±1mm	2700	1980	30W	66	A110
1G6002 Zephyr Line 1000/2700/30W/90/GN	1000x38x38±1mm	2700	1980	30W	66	A110
1G6003 Zephyr Line 1000/2700/30W/90/W	1000x38x38±1mm	2700	1980	30W	66	A110
1G6004 Zephyr Line 1000/3000/30W/90/B	1000x38x38±1mm	3000	1980	30W	66	A110
1G6005 Zephyr Line 1000/3000/30W/90/R	1000x38x38±1mm	3000	1980	30W	66	A110
1G6006 Zephyr Line 1000/3000/30W/90/GN	1000x38x38±1mm	3000	1980	30W	66	A110
1G6007 Zephyr Line 1000/3000/30W/90/W	1000x38x38±1mm	3000	1980	30W	66	A110
1G6008 Zephyr Line 1000/4000/30W/90/B	1000x38x38±1mm	4000	1980	30W	66	A110
1G6009 Zephyr Line 1000/4000/30W/90/R	1000x38x38±1mm	4000	1980	30W	66	A110
1G6010 Zephyr Line 1000/4000/30W/90/GN	1000x38x38±1mm	4000	1980	30W	66	A110
1G6011 Zephyr Line 1000/4000/30W/90/W	1000x38x38±1mm	4000	1980	30W	66	A110

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: July 12, 2024 1:52 AM. [www.greentek.eu](http://www.greentek.eu)