

Stiletto

GREENTEK LIGHTING

01



01

Our team has been innovating in the LED lighting field for over 15 years.

02

We are pioneers in special temperature colors for retail.



03

We provide custom LED lighting solutions tailored to your unique business needs.

05

We are crazy about customer care. Each customer has a dedicated account manager.

04

We are committed to manufacturing our products in the EU – from sourcing to finished product.



Account Management

Delivering dedicated support for a precise, satisfaction-driven vision.



R&D

Tailoring solutions to unique needs while continuously innovating for cutting-edge designs.



Concept

Crafting brand-defining lighting concepts, informed by market trends, industry insights, and EU standards.



Implementation

Expertly deploying lighting infrastructure with support for smart lighting system setup.



Customer Care

Enhancing post-implementation commitment to durability and performance.

About Stiletto

GREENTEK LIGHTING

02

Stiletto: Timeless Elegance

Step into a realm of refined illumination with the Stiletto Line, a collection that combines aesthetics with the precision of LED technology. This series showcases an array of luminaires and tracks that together form an ensemble of understated sophistication and brilliance.

Each luminaire within the Stiletto Line is a testament to meticulous craftsmanship. The design seamlessly blends sleek contours with architectural precision, resulting in luminaires that are not only a source of light but also an embodiment of artistry.

Elevate your space with the Stiletto Line, a manifestation of timeless aesthetics and modern ingenuity. Let these luminaires and tracks be your companions in creating an atmosphere that is both captivating and refined.



Stiletto Products

GREENTEK LIGHTING

03



Stiletto A

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 22lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto A - 2

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 22lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.




Stiletto A - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 32lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto B

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 24lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

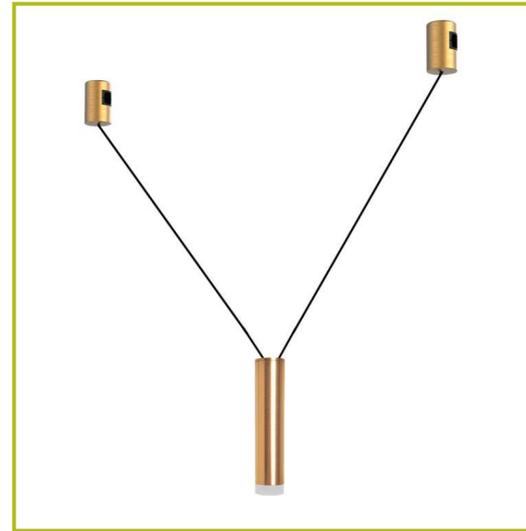

Stiletto B - 2

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 27lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto B - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 25°, 38°
- Luminaire efficiency: 24lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto B - 4

- CRI > 90 as standard
- Color temperatures: 3000K
- Beam angles: 120°
- Luminaire efficiency: 44lm/W @3000K
- Output power: 4 x 5W



Stiletto B - 6

- CRI > 90 as standard
- Color temperatures: 3000K
- Beam angles: 120°
- Luminaire efficiency: 44lm/W @3000K
- Output power: 6 x 5W




Stiletto B - 8

- CRI > 90 as standard
- Color temperatures: 3000K
- Beam angles: 120°
- Luminaire efficiency: 44lm/W @3000K
- Output power: 8 x 5W



Stiletto C - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 39lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

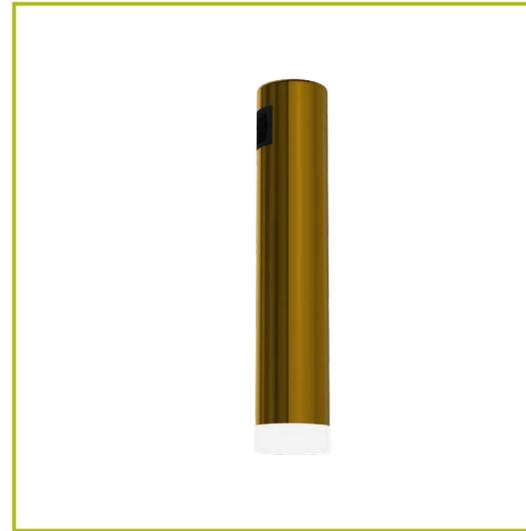

Stiletto D - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 21lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto E - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 25°, 38°
- Luminaire efficiency: 53lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto F - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 35°, 45°
- Luminaire efficiency: 88lm/W @3000K
- Output power: 4W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto G

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 17°, 24°, 36°
- Luminaire efficiency: 64lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto G - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 25lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto H

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 15°, 24°, 36°, 50°
- Luminaire efficiency: 64lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto H - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 24lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto I

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 17°, 24°, 36°
- Luminaire efficiency: 65lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto I - 10

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 38lm/W @3000K
- Output power: 12W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto J

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 15°, 24°, 36°, 50°
- Luminaire efficiency: 60lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto J - 5

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 26lm/W @3000K
- Output power: 5W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.




Stiletto K - 8

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 32lm/W @3000K
- Output power: 8W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto L

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 20°, 40°, 60°
- Luminaire efficiency: 31lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

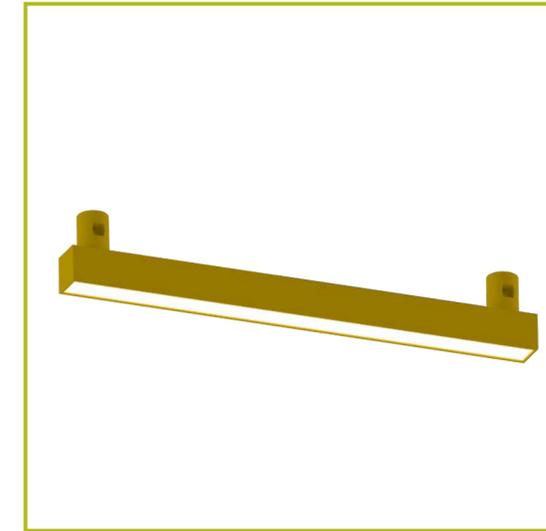


Stiletto L - 15

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 74lm/W @3000K
- Output power: 15W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.




Stiletto M - 15

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 60lm/W @3000K
- Output power: 18W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

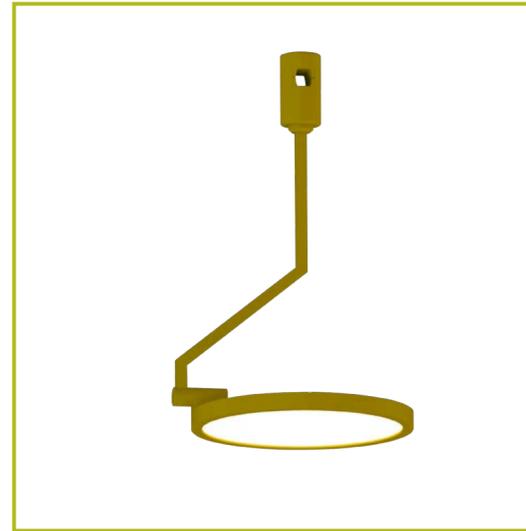

Stiletto N - 15

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 120°
- Luminaire efficiency: 74lm/W @3000K
- Output power: 15W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.

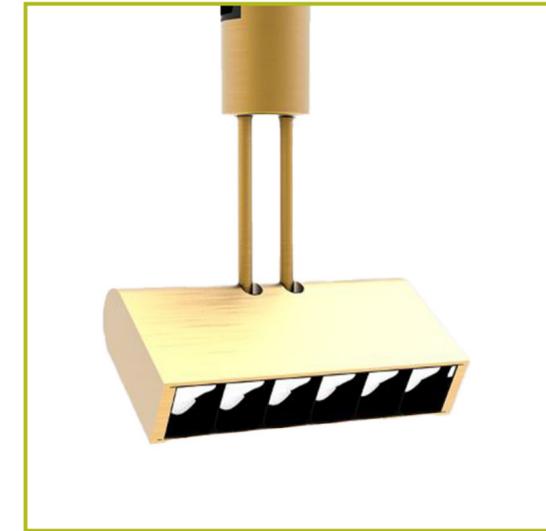

Stiletto O - 6L

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 30°
- Luminaire efficiency: 43lm/W @3000K
- Output power: 9W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto O - 6S

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 30°
- Luminaire efficiency: 37lm/W @3000K
- Output power: 9W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Stiletto P

- CRI > 90 as standard
- Color temperatures: 3000K, 4000K, 6500K
- Beam angles: 27°
- Luminaire efficiency: 22lm/W @3000K
- Output power: 7W
- Luminaires that can be DALI dimmable, by choosing an appropriate driver when configuring the system.



Circle



Circle 2 in 1



Circle 3 in 1




Chandelier




PR Base Kit




Square

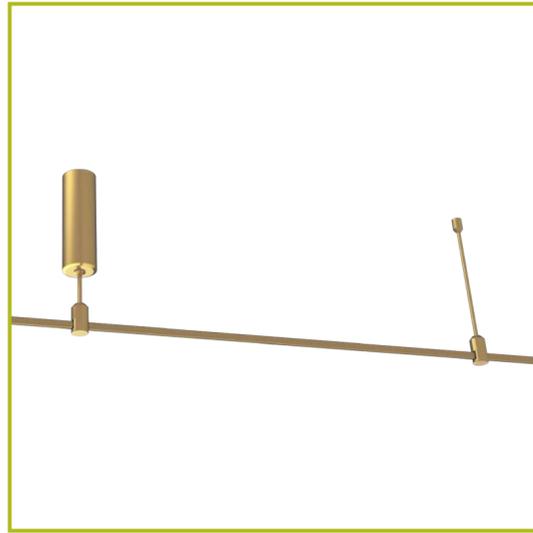


MD L

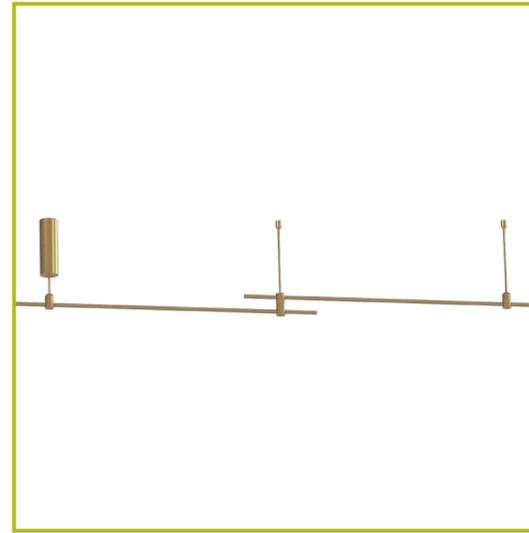

MD 2xL

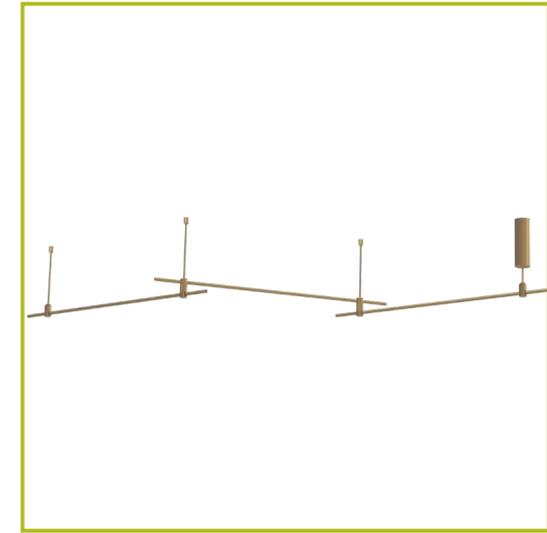

MD 3xL

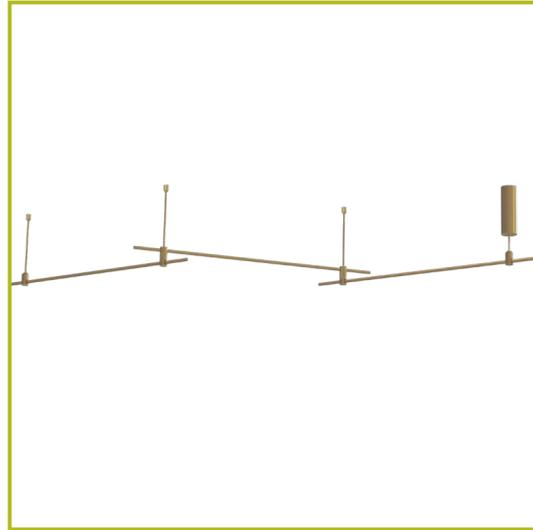

MD 4xL



Desk



Floor

Applications

Uncompromising Design: Immerse yourself in the synergy of form and function. Stiletto luminaires captivate with their sleek lines and precision, embodying the essence of modern design. The tracks, though unyielding in their structure, elegantly guide the luminaires to create a captivating visual journey.

Golden Brilliance: The Stiletto Line celebrates the opulence of gold, bringing a touch of luxury to your surroundings. Crafted with meticulous attention to detail, each luminaire and track radiates a rich golden hue that adds an air of refinement to any space.



Illuminating Artistry: Stiletto luminaires are more than sources of light; they're masterpieces that transform spaces into breathtaking canvases. The gentle glow emanates from within, casting enchanting shadows and highlighting architectural nuances, curating an ambiance that's both inviting and inspiring.

Seamless Integration: The Stiletto tracks offer a seamless integration that is captivating. Their golden tracks gracefully guide the luminaires, enabling you to orchestrate lighting arrangements that evoke emotions, set moods, and create unforgettable experiences.



Contact Us



Monday - Friday
09:00 - 18:00



+40 21 230 24 64/65
office@greentek.eu



Grigore Gafencu Street, 14,
014132, 1st District,
Bucharest, Romania

THANK YOU!