



Ennio SM Individual Lens

SURFACE MOUNTED | DALI SERIES

Ennio SM Individual Lens is a versatile suspended luminaire. Ennio creates a mellow ambient, pleasant light, appropriate for office environments in particular. It can be equipped with dimming and emergency kits.

Ennio SM Individual Lens has several series, determined by various add-on and controls:


- Ennio SM Individual Lens Non-DALI: the standard version
- Ennio SM Individual Lens Non-DALI EM: the standard version with emergency option
- Ennio SM Individual Lens DALI: with DALI controls for illumination adjustments
- Ennio SM Individual Lens DALI EM: with DALI controls for illumination adjustments and emergency options

FEATURES & BENEFITS

- CRI 80 as standard
- Color temperatures: 2200K, 2700K, 3000K, 4000K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency 129 lm/W @4000K

APPLICATION

Office | Healthcare | Hospitality | DIY

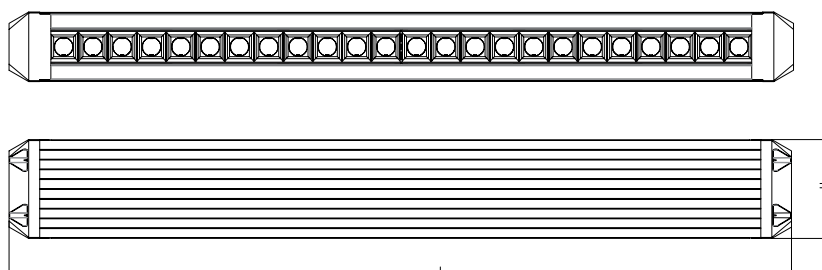


SPECIFICATIONS

Power consumption (W)	19W, 22W, 26W, 30W	23W, 28W, 32W, 36W	38W, 44W, 52W, 60W	46W, 56W, 64W, 72W
Dimensions (mm)	1189 x 57 x 81 ± 1mm	1476 x 57 x 81 ± 1mm	2337 x 57 x 81 ± 1mm	2911 x 57 x 81 ± 1mm
Weight (kg)	3.1 kg	3.8 kg	6.1 kg	7.1 kg
DALI addresses	1 address	1 address	2 addresses	2 addresses
Housing materials	Aluminum & Polycarbonate			
IK code	IK02			
THD (at 230V, 50Hz, Full load)	<9%			
Protection class	Safety class 1			
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F			
Operating humidity [%]	10 ÷ 85			
Power factor	≥0.95			
AC Input [Vac]	220 - 240 VAC			
Lens angle [°] (UP/DOWN)	15°, 21°, 28°, 46°, 57°			
Lifespan [h]	50.000			
Housing color	○ White - RAL 9003, ● Anodised black			
Lumen maintenance	L90/B10@50.000h at 25°C			
IP factor	IP20			
Control optional	DALI			
Warranty [years]	5			
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F			
Emergency option	-			


Light application	Standard
CRI	CRI 80
CCT [K]	2200K, 2700K, 3000K, 4000K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency


LIGHT DISTRIBUTION




15°




21°



28°



46°



57°

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

BATTERY WARRANTY

Non-DALI EM & DALI EM: 12 months warranty

Non-DALI & DALI: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT FOR DIMENSIONS 1214 X 57 X 81 ± 1MM AND 1501 X 57 X 81 ± 1MM

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 100W	Non-DALI	19	15	9	31	26	16
≥ 100W	Non-DALI	19	15	9	31	26	16
< 160W	DALI	13	10	6	22	17	10

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT FOR DIMENSIONS 2362 X 57 X 81 ± 1MM AND 2936 X 57 X 81 ± 1MM

Luminaire Power(W)	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	9	7	4	15	12	7
≥ 50W	Non-DALI	9	7	4	15	12	7
< 80W	DALI	6	5	3	11	8	5

RISK GROUP

Standard (CRI80)	RG1
FOOD (BVF, FBS, FSM)	RG1
FOOD ≤35W (FZM, FSH)	RG1
FOOD >35W (FZM, FSH)	RG2
FAS	RG1
AMB2200	RG1
ART	RG1
AGI	RG1
CRI90	RG1
CRI95	RG1
ENT	RG1

RG1

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30300 EnnioSM 120SM/2200/19W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	1690	19W	89	15°
2B30301 EnnioSM 120SM/2700/19W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2195	19W	116	15°
2B30302 EnnioSM 120SM/3000/19W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	2355	19W	124	15°
2B30303 EnnioSM 120SM/4000/19W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	2355	19W	124	15°
2B30304 EnnioSM 120SM/2200/19W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	1710	19W	90	21°
2B30305 EnnioSM 120SM/2700/19W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2215	19W	117	21°
2B30306 EnnioSM 120SM/3000/19W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	2375	19W	125	21°
2B30307 EnnioSM 120SM/4000/19W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	2375	19W	125	21°
2B30308 EnnioSM 120SM/2200/19W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	1640	19W	87	28°
2B30309 EnnioSM 120SM/2700/19W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2130	19W	113	28°
2B30310 EnnioSM 120SM/3000/19W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	2285	19W	121	28°
2B30311 EnnioSM 120SM/4000/19W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	2285	19W	121	28°
2B30312 EnnioSM 120SM/2200/19W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	1675	19W	89	46°
2B30313 EnnioSM 120SM/2700/19W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2175	19W	115	46°
2B30314 EnnioSM 120SM/3000/19W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	2330	19W	123	46°
2B30315 EnnioSM 120SM/4000/19W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	2330	19W	123	46°
2B30316 EnnioSM 120SM/2200/19W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	1610	19W	85	57°
2B30317 EnnioSM 120SM/2700/19W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2085	19W	110	57°
2B30318 EnnioSM 120SM/3000/19W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2235	19W	118	57°
2B30319 EnnioSM 120SM/4000/19W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2235	19W	118	57°
2B30320 EnnioSM 120SM/2200/22W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	1965	22W	90	15°
2B30321 EnnioSM 120SM/2700/22W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2550	22W	116	15°
2B30322 EnnioSM 120SM/3000/22W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	2735	22W	125	15°
2B30323 EnnioSM 120SM/4000/22W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	2735	22W	125	15°
2B30324 EnnioSM 120SM/2200/22W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	1985	22W	91	21°
2B30325 EnnioSM 120SM/2700/22W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2575	22W	118	21°
2B30326 EnnioSM 120SM/3000/22W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	2760	22W	126	21°
2B30327 EnnioSM 120SM/4000/22W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	2760	22W	126	21°
2B30328 EnnioSM 120SM/2200/22W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	1905	22W	87	28°
2B30329 EnnioSM 120SM/2700/22W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2475	22W	113	28°
2B30330 EnnioSM 120SM/3000/22W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	2655	22W	121	28°
2B30331 EnnioSM 120SM/4000/22W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	2655	22W	121	28°
2B30332 EnnioSM 120SM/2200/22W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	1945	22W	89	46°
2B30333 EnnioSM 120SM/2700/22W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2525	22W	115	46°
2B30334 EnnioSM 120SM/3000/22W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	2705	22W	123	46°
2B30335 EnnioSM 120SM/4000/22W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	2705	22W	123	46°
2B30336 EnnioSM 120SM/2200/22W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	1870	22W	85	57°
2B30337 EnnioSM 120SM/2700/22W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2425	22W	111	57°
2B30338 EnnioSM 120SM/3000/22W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2600	22W	119	57°
2B30339 EnnioSM 120SM/4000/22W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2600	22W	119	57°
2B30340 EnnioSM 120SM/2200/26W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	2235	26W	86	15°
2B30341 EnnioSM 120SM/2700/26W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	2900	26W	112	15°
2B30342 EnnioSM 120SM/3000/26W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	3110	26W	120	15°
2B30343 EnnioSM 120SM/4000/26W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	3110	26W	120	15°
2B30344 EnnioSM 120SM/2200/26W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	2255	26W	87	21°
2B30345 EnnioSM 120SM/2700/26W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	2930	26W	113	21°
2B30346 EnnioSM 120SM/3000/26W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	3140	26W	121	21°
2B30347 EnnioSM 120SM/4000/26W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	3140	26W	121	21°
2B30348 EnnioSM 120SM/2200/26W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	2170	26W	84	28°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30349 EnnioSM 120SM/2700/26W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	2815	26W	109	28°
2B30350 EnnioSM 120SM/3000/26W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	3020	26W	117	28°
2B30351 EnnioSM 120SM/4000/26W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	3020	26W	117	28°
2B30352 EnnioSM 120SM/2200/26W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	2215	26W	86	46°
2B30353 EnnioSM 120SM/2700/26W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	2870	26W	111	46°
2B30354 EnnioSM 120SM/3000/26W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	3080	26W	119	46°
2B30355 EnnioSM 120SM/4000/26W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	3080	26W	119	46°
2B30356 EnnioSM 120SM/2200/26W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	2125	26W	82	57°
2B30357 EnnioSM 120SM/2700/26W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	2755	26W	106	57°
2B30358 EnnioSM 120SM/3000/26W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	2955	26W	114	57°
2B30359 EnnioSM 120SM/4000/26W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	2955	26W	114	57°
2B30360 EnnioSM 120SM/2200/30W/80/A15/F	1189 x 57 x 81 ± 1mm	2200	2595	30W	90	15°
2B30361 EnnioSM 120SM/2700/30W/80/A15/F	1189 x 57 x 81 ± 1mm	2700	3365	30W	117	15°
2B30362 EnnioSM 120SM/3000/30W/80/A15/F	1189 x 57 x 81 ± 1mm	3000	3610	30W	125	15°
2B30363 EnnioSM 120SM/4000/30W/80/A15/F	1189 x 57 x 81 ± 1mm	4000	3610	30W	125	15°
2B30364 EnnioSM 120SM/2200/30W/80/A21/F	1189 x 57 x 81 ± 1mm	2200	2620	30W	91	21°
2B30365 EnnioSM 120SM/2700/30W/80/A21/F	1189 x 57 x 81 ± 1mm	2700	3400	30W	118	21°
2B30366 EnnioSM 120SM/3000/30W/80/A21/F	1189 x 57 x 81 ± 1mm	3000	3645	30W	126	21°
2B30367 EnnioSM 120SM/4000/30W/80/A21/F	1189 x 57 x 81 ± 1mm	4000	3645	30W	126	21°
2B30368 EnnioSM 120SM/2200/30W/80/A28/F	1189 x 57 x 81 ± 1mm	2200	2515	30W	87	28°
2B30369 EnnioSM 120SM/2700/30W/80/A28/F	1189 x 57 x 81 ± 1mm	2700	3265	30W	113	28°
2B30370 EnnioSM 120SM/3000/30W/80/A28/F	1189 x 57 x 81 ± 1mm	3000	3505	30W	121	28°
2B30371 EnnioSM 120SM/4000/30W/80/A28/F	1189 x 57 x 81 ± 1mm	4000	3505	30W	121	28°
2B30372 EnnioSM 120SM/2200/30W/80/A46/F	1189 x 57 x 81 ± 1mm	2200	2570	30W	89	46°
2B30373 EnnioSM 120SM/2700/30W/80/A46/F	1189 x 57 x 81 ± 1mm	2700	3335	30W	115	46°
2B30374 EnnioSM 120SM/3000/30W/80/A46/F	1189 x 57 x 81 ± 1mm	3000	3575	30W	124	46°
2B30375 EnnioSM 120SM/4000/30W/80/A46/F	1189 x 57 x 81 ± 1mm	4000	3575	30W	124	46°
2B30376 EnnioSM 120SM/2200/30W/80/A57/F	1189 x 57 x 81 ± 1mm	2200	2465	30W	85	57°
2B30377 EnnioSM 120SM/2700/30W/80/A57/F	1189 x 57 x 81 ± 1mm	2700	3200	30W	111	57°
2B30378 EnnioSM 120SM/3000/30W/80/A57/F	1189 x 57 x 81 ± 1mm	3000	3430	30W	119	57°
2B30379 EnnioSM 120SM/4000/30W/80/A57/F	1189 x 57 x 81 ± 1mm	4000	3430	30W	119	57°
2B30380 EnnioSM 150SM/2200/23W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2110	23W	92	15°
2B30381 EnnioSM 150SM/2700/23W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	2740	23W	120	15°
2B30382 EnnioSM 150SM/3000/23W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	2935	23W	128	15°
2B30383 EnnioSM 150SM/4000/23W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	2935	23W	128	15°
2B30384 EnnioSM 150SM/2200/23W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2130	23W	93	21°
2B30385 EnnioSM 150SM/2700/23W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	2765	23W	121	21°
2B30386 EnnioSM 150SM/3000/23W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	2965	23W	129	21°
2B30387 EnnioSM 150SM/4000/23W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	2965	23W	129	21°
2B30388 EnnioSM 150SM/2200/23W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2045	23W	89	28°
2B30389 EnnioSM 150SM/2700/23W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	2655	23W	116	28°
2B30390 EnnioSM 150SM/3000/23W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	2850	23W	124	28°
2B30391 EnnioSM 150SM/4000/23W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	2850	23W	124	28°
2B30392 EnnioSM 150SM/2200/23W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2090	23W	91	46°
2B30393 EnnioSM 150SM/2700/23W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	2710	23W	118	46°
2B30394 EnnioSM 150SM/3000/23W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	2905	23W	127	46°
2B30395 EnnioSM 150SM/4000/23W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	2905	23W	127	46°
2B30396 EnnioSM 150SM/2200/23W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2005	23W	88	57°
2B30397 EnnioSM 150SM/2700/23W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	2605	23W	114	57°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30398 EnnioSM 150SM/3000/23W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	2790	23W	122	57°
2B30399 EnnioSM 150SM/4000/23W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	2790	23W	122	57°
2B30400 EnnioSM 150SM/2200/28W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2450	28W	88	15°
2B30401 EnnioSM 150SM/2700/28W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	3180	28W	114	15°
2B30402 EnnioSM 150SM/3000/28W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	3410	28W	122	15°
2B30403 EnnioSM 150SM/4000/28W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	3410	28W	122	15°
2B30404 EnnioSM 150SM/2200/28W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2475	28W	89	21°
2B30405 EnnioSM 150SM/2700/28W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	3215	28W	115	21°
2B30406 EnnioSM 150SM/3000/28W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	3445	28W	124	21°
2B30407 EnnioSM 150SM/4000/28W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	3445	28W	124	21°
2B30408 EnnioSM 150SM/2200/28W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2380	28W	85	28°
2B30409 EnnioSM 150SM/2700/28W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	3090	28W	111	28°
2B30410 EnnioSM 150SM/3000/28W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	3310	28W	119	28°
2B30411 EnnioSM 150SM/4000/28W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	3310	28W	119	28°
2B30412 EnnioSM 150SM/2200/28W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2425	28W	87	46°
2B30413 EnnioSM 150SM/2700/28W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	3150	28W	113	46°
2B30414 EnnioSM 150SM/3000/28W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	3380	28W	121	46°
2B30415 EnnioSM 150SM/4000/28W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	3380	28W	121	46°
2B30416 EnnioSM 150SM/2200/28W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2330	28W	84	57°
2B30417 EnnioSM 150SM/2700/28W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3025	28W	109	57°
2B30418 EnnioSM 150SM/3000/28W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	3245	28W	116	57°
2B30419 EnnioSM 150SM/4000/28W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	3245	28W	116	57°
2B30420 EnnioSM 150SM/2200/32W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	2795	32W	88	15°
2B30421 EnnioSM 150SM/2700/32W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	3625	32W	114	15°
2B30422 EnnioSM 150SM/3000/32W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	3885	32W	122	15°
2B30423 EnnioSM 150SM/4000/32W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	3885	32W	122	15°
2B30424 EnnioSM 150SM/2200/32W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	2820	32W	89	21°
2B30425 EnnioSM 150SM/2700/32W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	3660	32W	115	21°
2B30426 EnnioSM 150SM/3000/32W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	3925	32W	123	21°
2B30427 EnnioSM 150SM/4000/32W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	3925	32W	123	21°
2B30428 EnnioSM 150SM/2200/32W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	2710	32W	85	28°
2B30429 EnnioSM 150SM/2700/32W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	3515	32W	110	28°
2B30430 EnnioSM 150SM/3000/32W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	3770	32W	118	28°
2B30431 EnnioSM 150SM/4000/32W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	3770	32W	118	28°
2B30432 EnnioSM 150SM/2200/32W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	2765	32W	87	46°
2B30433 EnnioSM 150SM/2700/32W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	3590	32W	113	46°
2B30434 EnnioSM 150SM/3000/32W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	3850	32W	121	46°
2B30435 EnnioSM 150SM/4000/32W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	3850	32W	121	46°
2B30436 EnnioSM 150SM/2200/32W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	2655	32W	83	57°
2B30437 EnnioSM 150SM/2700/32W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3445	32W	108	57°
2B30438 EnnioSM 150SM/3000/32W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	3695	32W	116	57°
2B30439 EnnioSM 150SM/4000/32W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	3695	32W	116	57°
2B30440 EnnioSM 150SM/2200/36W/80/A15/F	1476 x 57 x 81 ± 1mm	2200	3220	36W	90	15°
2B30441 EnnioSM 150SM/2700/36W/80/A15/F	1476 x 57 x 81 ± 1mm	2700	4180	36W	117	15°
2B30442 EnnioSM 150SM/3000/36W/80/A15/F	1476 x 57 x 81 ± 1mm	3000	4480	36W	125	15°
2B30443 EnnioSM 150SM/4000/36W/80/A15/F	1476 x 57 x 81 ± 1mm	4000	4480	36W	125	15°
2B30444 EnnioSM 150SM/2200/36W/80/A21/F	1476 x 57 x 81 ± 1mm	2200	3250	36W	91	21°
2B30445 EnnioSM 150SM/2700/36W/80/A21/F	1476 x 57 x 81 ± 1mm	2700	4220	36W	118	21°
2B30446 EnnioSM 150SM/3000/36W/80/A21/F	1476 x 57 x 81 ± 1mm	3000	4525	36W	126	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30447 EnnioSM 150SM/4000/36W/80/A21/F	1476 x 57 x 81 ± 1mm	4000	4525	36W	126	21°
2B30448 EnnioSM 150SM/2200/36W/80/A28/F	1476 x 57 x 81 ± 1mm	2200	3125	36W	87	28°
2B30449 EnnioSM 150SM/2700/36W/80/A28/F	1476 x 57 x 81 ± 1mm	2700	4055	36W	113	28°
2B30450 EnnioSM 150SM/3000/36W/80/A28/F	1476 x 57 x 81 ± 1mm	3000	4350	36W	121	28°
2B30451 EnnioSM 150SM/4000/36W/80/A28/F	1476 x 57 x 81 ± 1mm	4000	4350	36W	121	28°
2B30452 EnnioSM 150SM/2200/36W/80/A46/F	1476 x 57 x 81 ± 1mm	2200	3185	36W	89	46°
2B30453 EnnioSM 150SM/2700/36W/80/A46/F	1476 x 57 x 81 ± 1mm	2700	4135	36W	115	46°
2B30454 EnnioSM 150SM/3000/36W/80/A46/F	1476 x 57 x 81 ± 1mm	3000	4435	36W	124	46°
2B30455 EnnioSM 150SM/4000/36W/80/A46/F	1476 x 57 x 81 ± 1mm	4000	4435	36W	124	46°
2B30456 EnnioSM 150SM/2200/36W/80/A57/F	1476 x 57 x 81 ± 1mm	2200	3060	36W	85	57°
2B30457 EnnioSM 150SM/2700/36W/80/A57/F	1476 x 57 x 81 ± 1mm	2700	3970	36W	111	57°
2B30458 EnnioSM 150SM/3000/36W/80/A57/F	1476 x 57 x 81 ± 1mm	3000	4260	36W	119	57°
2B30459 EnnioSM 150SM/4000/36W/80/A57/F	1476 x 57 x 81 ± 1mm	4000	4260	36W	119	57°
2B30460 EnnioSM 240SM/2200/38W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	3380	38W	89	15°
2B30461 EnnioSM 240SM/2700/38W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	4390	38W	116	15°
2B30462 EnnioSM 240SM/3000/38W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	4710	38W	124	15°
2B30463 EnnioSM 240SM/4000/38W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	4710	38W	124	15°
2B30464 EnnioSM 240SM/2200/38W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	3420	38W	90	21°
2B30465 EnnioSM 240SM/2700/38W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	4430	38W	117	21°
2B30466 EnnioSM 240SM/3000/38W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	4750	38W	125	21°
2B30467 EnnioSM 240SM/4000/38W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	4750	38W	125	21°
2B30468 EnnioSM 240SM/2200/38W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	3280	38W	87	28°
2B30469 EnnioSM 240SM/2700/38W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	4260	38W	113	28°
2B30470 EnnioSM 240SM/3000/38W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	4570	38W	121	28°
2B30471 EnnioSM 240SM/4000/38W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	4570	38W	121	28°
2B30472 EnnioSM 240SM/2200/38W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	3350	38W	89	46°
2B30473 EnnioSM 240SM/2700/38W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	4350	38W	115	46°
2B30474 EnnioSM 240SM/3000/38W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	4660	38W	123	46°
2B30475 EnnioSM 240SM/4000/38W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	4660	38W	123	46°
2B30476 EnnioSM 240SM/2200/38W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	3220	38W	85	57°
2B30477 EnnioSM 240SM/2700/38W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	4170	38W	110	57°
2B30478 EnnioSM 240SM/3000/38W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	4470	38W	118	57°
2B30479 EnnioSM 240SM/4000/38W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	4470	38W	118	57°
2B30480 EnnioSM 240SM/2200/44W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	3930	44W	90	15°
2B30481 EnnioSM 240SM/2700/44W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	5100	44W	116	15°
2B30482 EnnioSM 240SM/3000/44W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	5470	44W	125	15°
2B30483 EnnioSM 240SM/4000/44W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	5470	44W	125	15°
2B30484 EnnioSM 240SM/2200/44W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	3970	44W	91	21°
2B30485 EnnioSM 240SM/2700/44W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	5150	44W	118	21°
2B30486 EnnioSM 240SM/3000/44W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	5520	44W	126	21°
2B30487 EnnioSM 240SM/4000/44W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	5520	44W	126	21°
2B30488 EnnioSM 240SM/2200/44W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	3810	44W	87	28°
2B30489 EnnioSM 240SM/2700/44W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	4950	44W	113	28°
2B30490 EnnioSM 240SM/3000/44W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	5310	44W	121	28°
2B30491 EnnioSM 240SM/4000/44W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	5310	44W	121	28°
2B30492 EnnioSM 240SM/2200/44W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	3890	44W	89	46°
2B30493 EnnioSM 240SM/2700/44W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	5050	44W	115	46°
2B30494 EnnioSM 240SM/3000/44W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	5410	44W	123	46°
2B30495 EnnioSM 240SM/4000/44W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	5410	44W	123	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30496 EnnioSM 240SM/2200/44W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	3740	44W	85	57°
2B30497 EnnioSM 240SM/2700/44W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	4850	44W	111	57°
2B30498 EnnioSM 240SM/3000/44W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	5200	44W	119	57°
2B30499 EnnioSM 240SM/4000/44W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	5200	44W	119	57°
2B30500 EnnioSM 240SM/2200/52W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	4470	52W	86	15°
2B30501 EnnioSM 240SM/2700/52W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	5800	52W	112	15°
2B30502 EnnioSM 240SM/3000/52W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	6220	52W	120	15°
2B30503 EnnioSM 240SM/4000/52W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	6220	52W	120	15°
2B30504 EnnioSM 240SM/2200/52W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	4510	52W	87	21°
2B30505 EnnioSM 240SM/2700/52W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	5860	52W	113	21°
2B30506 EnnioSM 240SM/3000/52W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	6280	52W	121	21°
2B30507 EnnioSM 240SM/4000/52W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	6280	52W	121	21°
2B30508 EnnioSM 240SM/2200/52W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	4340	52W	84	28°
2B30509 EnnioSM 240SM/2700/52W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	5630	52W	109	28°
2B30510 EnnioSM 240SM/3000/52W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	6040	52W	117	28°
2B30511 EnnioSM 240SM/4000/52W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	6040	52W	117	28°
2B30512 EnnioSM 240SM/2200/52W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	4430	52W	86	46°
2B30513 EnnioSM 240SM/2700/52W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	5740	52W	111	46°
2B30514 EnnioSM 240SM/3000/52W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	6160	52W	119	46°
2B30515 EnnioSM 240SM/4000/52W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	6160	52W	119	46°
2B30516 EnnioSM 240SM/2200/52W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	4250	52W	82	57°
2B30517 EnnioSM 240SM/2700/52W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	5510	52W	106	57°
2B30518 EnnioSM 240SM/3000/52W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	5910	52W	114	57°
2B30519 EnnioSM 240SM/4000/52W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	5910	52W	114	57°
2B30520 EnnioSM 240SM/2200/60W/80/A15/F	2337 x 57 x 81 ± 1mm	2200	5190	60W	90	15°
2B30521 EnnioSM 240SM/2700/60W/80/A15/F	2337 x 57 x 81 ± 1mm	2700	6730	60W	117	15°
2B30522 EnnioSM 240SM/3000/60W/80/A15/F	2337 x 57 x 81 ± 1mm	3000	7220	60W	125	15°
2B30523 EnnioSM 240SM/4000/60W/80/A15/F	2337 x 57 x 81 ± 1mm	4000	7220	60W	125	15°
2B30524 EnnioSM 240SM/2200/60W/80/A21/F	2337 x 57 x 81 ± 1mm	2200	5240	60W	91	21°
2B30525 EnnioSM 240SM/2700/60W/80/A21/F	2337 x 57 x 81 ± 1mm	2700	6800	60W	118	21°
2B30526 EnnioSM 240SM/3000/60W/80/A21/F	2337 x 57 x 81 ± 1mm	3000	7290	60W	126	21°
2B30527 EnnioSM 240SM/4000/60W/80/A21/F	2337 x 57 x 81 ± 1mm	4000	7290	60W	126	21°
2B30528 EnnioSM 240SM/2200/60W/80/A28/F	2337 x 57 x 81 ± 1mm	2200	5030	60W	87	28°
2B30529 EnnioSM 240SM/2700/60W/80/A28/F	2337 x 57 x 81 ± 1mm	2700	6530	60W	113	28°
2B30530 EnnioSM 240SM/3000/60W/80/A28/F	2337 x 57 x 81 ± 1mm	3000	7010	60W	121	28°
2B30531 EnnioSM 240SM/4000/60W/80/A28/F	2337 x 57 x 81 ± 1mm	4000	7010	60W	121	28°
2B30532 EnnioSM 240SM/2200/60W/80/A46/F	2337 x 57 x 81 ± 1mm	2200	5140	60W	89	46°
2B30533 EnnioSM 240SM/2700/60W/80/A46/F	2337 x 57 x 81 ± 1mm	2700	6670	60W	115	46°
2B30534 EnnioSM 240SM/3000/60W/80/A46/F	2337 x 57 x 81 ± 1mm	3000	7150	60W	124	46°
2B30535 EnnioSM 240SM/4000/60W/80/A46/F	2337 x 57 x 81 ± 1mm	4000	7150	60W	124	46°
2B30536 EnnioSM 240SM/2200/60W/80/A57/F	2337 x 57 x 81 ± 1mm	2200	4930	60W	85	57°
2B30537 EnnioSM 240SM/2700/60W/80/A57/F	2337 x 57 x 81 ± 1mm	2700	6400	60W	111	57°
2B30538 EnnioSM 240SM/3000/60W/80/A57/F	2337 x 57 x 81 ± 1mm	3000	6860	60W	119	57°
2B30539 EnnioSM 240SM/4000/60W/80/A57/F	2337 x 57 x 81 ± 1mm	4000	6860	60W	119	57°
2B30540 EnnioSM 300SM/2200/46W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	4220	46W	92	15°
2B30541 EnnioSM 300SM/2700/46W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	5480	46W	120	15°
2B30542 EnnioSM 300SM/3000/46W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	5870	46W	128	15°
2B30543 EnnioSM 300SM/4000/46W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	5870	46W	128	15°
2B30544 EnnioSM 300SM/2200/46W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	4260	46W	93	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30545 EnnioSM 300SM/2700/46W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	5530	46W	121	21°
2B30546 EnnioSM 300SM/3000/46W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	5930	46W	129	21°
2B30547 EnnioSM 300SM/4000/46W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	5930	46W	129	21°
2B30548 EnnioSM 300SM/2200/46W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	4090	46W	89	28°
2B30549 EnnioSM 300SM/2700/46W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	5310	46W	116	28°
2B30550 EnnioSM 300SM/3000/46W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	5700	46W	124	28°
2B30551 EnnioSM 300SM/4000/46W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	5700	46W	124	28°
2B30552 EnnioSM 300SM/2200/46W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	4180	46W	91	46°
2B30553 EnnioSM 300SM/2700/46W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	5420	46W	118	46°
2B30554 EnnioSM 300SM/3000/46W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	5810	46W	127	46°
2B30555 EnnioSM 300SM/4000/46W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	5810	46W	127	46°
2B30556 EnnioSM 300SM/2200/46W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	4010	46W	88	57°
2B30557 EnnioSM 300SM/2700/46W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	5210	46W	114	57°
2B30558 EnnioSM 300SM/3000/46W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	5580	46W	122	57°
2B30559 EnnioSM 300SM/4000/46W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	5580	46W	122	57°
2B30560 EnnioSM 300SM/2200/56W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	4900	56W	88	15°
2B30561 EnnioSM 300SM/2700/56W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	6360	56W	114	15°
2B30562 EnnioSM 300SM/3000/56W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	6820	56W	122	15°
2B30563 EnnioSM 300SM/4000/56W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	6820	56W	122	15°
2B30564 EnnioSM 300SM/2200/56W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	4950	56W	89	21°
2B30565 EnnioSM 300SM/2700/56W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	6430	56W	115	21°
2B30566 EnnioSM 300SM/3000/56W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	6890	56W	124	21°
2B30567 EnnioSM 300SM/4000/56W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	6890	56W	124	21°
2B30568 EnnioSM 300SM/2200/56W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	4760	56W	85	28°
2B30569 EnnioSM 300SM/2700/56W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	6180	56W	111	28°
2B30570 EnnioSM 300SM/3000/56W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	6620	56W	119	28°
2B30571 EnnioSM 300SM/4000/56W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	6620	56W	119	28°
2B30572 EnnioSM 300SM/2200/56W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	4850	56W	87	46°
2B30573 EnnioSM 300SM/2700/56W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	6300	56W	113	46°
2B30574 EnnioSM 300SM/3000/56W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	6760	56W	121	46°
2B30575 EnnioSM 300SM/4000/56W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	6760	56W	121	46°
2B30576 EnnioSM 300SM/2200/56W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	4660	56W	84	57°
2B30577 EnnioSM 300SM/2700/56W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	6050	56W	109	57°
2B30578 EnnioSM 300SM/3000/56W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	6490	56W	116	57°
2B30579 EnnioSM 300SM/4000/56W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	6490	56W	116	57°
2B30580 EnnioSM 300SM/2200/64W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	5590	64W	88	15°
2B30581 EnnioSM 300SM/2700/64W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	7250	64W	114	15°
2B30582 EnnioSM 300SM/3000/64W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	7770	64W	122	15°
2B30583 EnnioSM 300SM/4000/64W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	7770	64W	122	15°
2B30584 EnnioSM 300SM/2200/64W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	5640	64W	89	21°
2B30585 EnnioSM 300SM/2700/64W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	7320	64W	115	21°
2B30586 EnnioSM 300SM/3000/64W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	7850	64W	123	21°
2B30587 EnnioSM 300SM/4000/64W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	7850	64W	123	21°
2B30588 EnnioSM 300SM/2200/64W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	5420	64W	85	28°
2B30589 EnnioSM 300SM/2700/64W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	7030	64W	110	28°
2B30590 EnnioSM 300SM/3000/64W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	7540	64W	118	28°
2B30591 EnnioSM 300SM/4000/64W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	7540	64W	118	28°
2B30592 EnnioSM 300SM/2200/64W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	5530	64W	87	46°
2B30593 EnnioSM 300SM/2700/64W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	7180	64W	113	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30594 EnnioSM 300SM/3000/64W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	7700	64W	121	46°
2B30595 EnnioSM 300SM/4000/64W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	7700	64W	121	46°
2B30596 EnnioSM 300SM/2200/64W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	5310	64W	83	57°
2B30597 EnnioSM 300SM/2700/64W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	6890	64W	108	57°
2B30598 EnnioSM 300SM/3000/64W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	7390	64W	116	57°
2B30599 EnnioSM 300SM/4000/64W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	7390	64W	116	57°
2B30600 EnnioSM 300SM/2200/72W/80/A15/F	2911 x 57 x 81 ± 1mm	2200	6440	72W	90	15°
2B30601 EnnioSM 300SM/2700/72W/80/A15/F	2911 x 57 x 81 ± 1mm	2700	8360	72W	117	15°
2B30602 EnnioSM 300SM/3000/72W/80/A15/F	2911 x 57 x 81 ± 1mm	3000	8960	72W	125	15°
2B30603 EnnioSM 300SM/4000/72W/80/A15/F	2911 x 57 x 81 ± 1mm	4000	8960	72W	125	15°
2B30604 EnnioSM 300SM/2200/72W/80/A21/F	2911 x 57 x 81 ± 1mm	2200	6500	72W	91	21°
2B30605 EnnioSM 300SM/2700/72W/80/A21/F	2911 x 57 x 81 ± 1mm	2700	8440	72W	118	21°
2B30606 EnnioSM 300SM/3000/72W/80/A21/F	2911 x 57 x 81 ± 1mm	3000	9050	72W	126	21°
2B30607 EnnioSM 300SM/4000/72W/80/A21/F	2911 x 57 x 81 ± 1mm	4000	9050	72W	126	21°
2B30608 EnnioSM 300SM/2200/72W/80/A28/F	2911 x 57 x 81 ± 1mm	2200	6250	72W	87	28°
2B30609 EnnioSM 300SM/2700/72W/80/A28/F	2911 x 57 x 81 ± 1mm	2700	8110	72W	113	28°
2B30610 EnnioSM 300SM/3000/72W/80/A28/F	2911 x 57 x 81 ± 1mm	3000	8700	72W	121	28°
2B30611 EnnioSM 300SM/4000/72W/80/A28/F	2911 x 57 x 81 ± 1mm	4000	8700	72W	121	28°
2B30612 EnnioSM 300SM/2200/72W/80/A46/F	2911 x 57 x 81 ± 1mm	2200	6370	72W	89	46°
2B30613 EnnioSM 300SM/2700/72W/80/A46/F	2911 x 57 x 81 ± 1mm	2700	8270	72W	115	46°
2B30614 EnnioSM 300SM/3000/72W/80/A46/F	2911 x 57 x 81 ± 1mm	3000	8870	72W	124	46°
2B30615 EnnioSM 300SM/4000/72W/80/A46/F	2911 x 57 x 81 ± 1mm	4000	8870	72W	124	46°
2B30616 EnnioSM 300SM/2200/72W/80/A57/F	2911 x 57 x 81 ± 1mm	2200	6120	72W	85	57°
2B30617 EnnioSM 300SM/2700/72W/80/A57/F	2911 x 57 x 81 ± 1mm	2700	7940	72W	111	57°
2B30618 EnnioSM 300SM/3000/72W/80/A57/F	2911 x 57 x 81 ± 1mm	3000	8520	72W	119	57°
2B30619 EnnioSM 300SM/4000/72W/80/A57/F	2911 x 57 x 81 ± 1mm	4000	8520	72W	119	57°