



## Lenyk N IL TRK

### TRACK LINEARS | NON-DALI SERIES

A sleek track-mounted luminaire that delivers uniform lighting for industrial and retail applications. It can be mounted in continuous rows for an impressive effect. The luminaire has a new and modern aluminium housing, while featuring very high efficiency (171 lm/W). It delivers high lighting quality and comes equipped with a wide range of beam angles, from the narrowest to the widest. Lenyk N IL TRK also features double and simple-asymmetric beams for a perfect spread of light across the shelves without wasting it on the corridors.

Lenyk N IL TRK has several series, determined by various add-on and controls:


- Lenyk N IL TRK Non-DALI: the standard for industrial, DIY and retail spaces
- Lenyk N IL TRK DALI: with DALI dimming

### FEATURES & BENEFITS

- CRI  $\geq$  80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: WB (Wide Beam - 90°), NB (Narrow Beam - 60°), TB (Tight Beam - 30°), DA (Double Asymmetric) and SA (Simple Asymmetric)

### APPLICATION

Grocery & Supermarkets | Retail | DIY

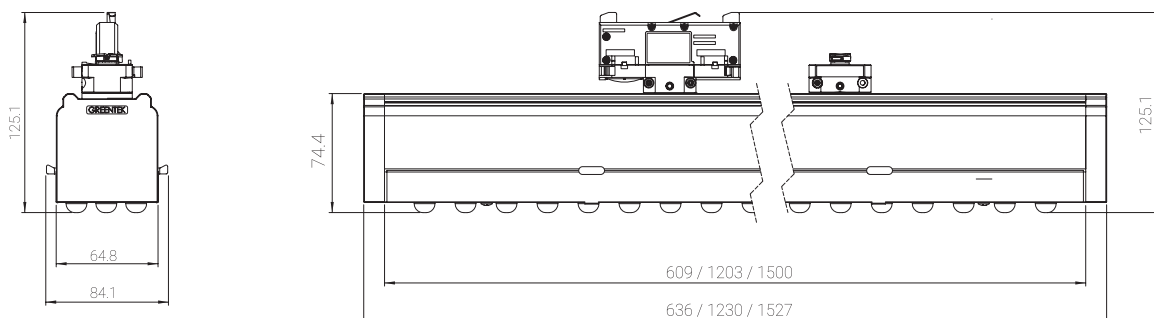


SPECIFICATIONS

Power consumption	12W, 20W	21W, 37W, 44W, 50W	26W, 35W, 45W, 53W, 62W
Dimensions	636 x 125.1 x 84.1 ± 1mm	1230 x 125.1 x 84.1 ± 1mm	1527 x 125.1 x 84.1 ± 1mm
Weight	2 Kg	2.7 Kg	3.1 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<8%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA, SA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	-		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

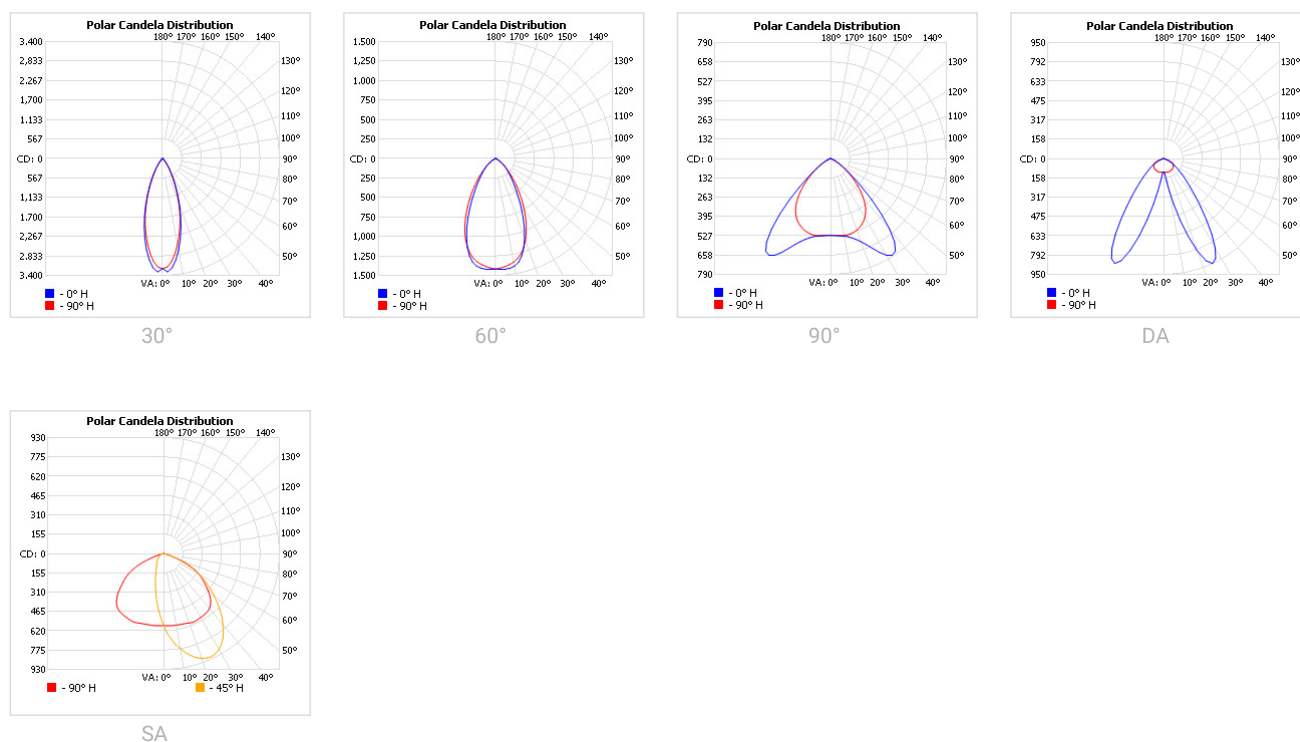

**TOLERANCES****Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power [W]	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
<50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
<80W	DALI	27	21	13	45	35	21

**RISK GROUP****Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**RG2**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
190000 LenykNIL TRK60/3000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	3000	1740	12W	145	30°
190001 LenykNIL TRK60/4000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	4000	1810	12W	151	30°
190002 LenykNIL TRK60/5000/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	5000	1860	12W	155	30°
190003 LenykNIL TRK60/6500/12W/80/TB	636 x 125.1 x 84.1 ± 1mm	6500	1810	12W	151	30°
190004 LenykNIL TRK60/3000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	3000	1725	12W	144	60°
190005 LenykNIL TRK60/4000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	4000	1800	12W	150	60°
190006 LenykNIL TRK60/5000/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	5000	1845	12W	154	60°
190007 LenykNIL TRK60/6500/12W/80/NB	636 x 125.1 x 84.1 ± 1mm	6500	1800	12W	150	60°
190008 LenykNIL TRK60/3000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	3000	1735	12W	145	90°
190009 LenykNIL TRK60/4000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	4000	1805	12W	151	90°
190010 LenykNIL TRK60/5000/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	5000	1855	12W	155	90°
190011 LenykNIL TRK60/6500/12W/80/WB	636 x 125.1 x 84.1 ± 1mm	6500	1805	12W	151	90°
190012 LenykNIL TRK60/3000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	3000	1725	12W	144	DA
190013 LenykNIL TRK60/4000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	4000	1800	12W	150	DA
190014 LenykNIL TRK60/5000/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	5000	1845	12W	154	DA
190015 LenykNIL TRK60/6500/12W/80/DA	636 x 125.1 x 84.1 ± 1mm	6500	1800	12W	150	DA
190016 LenykNIL TRK60/3000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	3000	1655	12W	138	SA
190017 LenykNIL TRK60/4000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	4000	1725	12W	144	SA
190018 LenykNIL TRK60/5000/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	5000	1770	12W	148	SA
190019 LenykNIL TRK60/6500/12W/80/SA	636 x 125.1 x 84.1 ± 1mm	6500	1725	12W	144	SA
190020 LenykNIL TRK60/3000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	3000	2895	20W	145	30°
190021 LenykNIL TRK60/4000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	4000	3020	20W	151	30°
190022 LenykNIL TRK60/5000/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	5000	3100	20W	155	30°
190023 LenykNIL TRK60/6500/20W/80/TB	636 x 125.1 x 84.1 ± 1mm	6500	3020	20W	151	30°
190024 LenykNIL TRK60/3000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	3000	2875	20W	144	60°
190025 LenykNIL TRK60/4000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	4000	2995	20W	150	60°
190026 LenykNIL TRK60/5000/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	5000	3075	20W	154	60°
190027 LenykNIL TRK60/6500/20W/80/NB	636 x 125.1 x 84.1 ± 1mm	6500	2995	20W	150	60°
190028 LenykNIL TRK60/3000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	3000	2890	20W	145	90°
190029 LenykNIL TRK60/4000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	4000	3010	20W	151	90°
190030 LenykNIL TRK60/5000/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	5000	3090	20W	155	90°
190031 LenykNIL TRK60/6500/20W/80/WB	636 x 125.1 x 84.1 ± 1mm	6500	3010	20W	151	90°
190032 LenykNIL TRK60/3000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	3000	2875	20W	144	DA
190033 LenykNIL TRK60/4000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	4000	2995	20W	150	DA
190034 LenykNIL TRK60/5000/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	5000	3075	20W	154	DA
190035 LenykNIL TRK60/6500/20W/80/DA	636 x 125.1 x 84.1 ± 1mm	6500	2995	20W	150	DA
190036 LenykNIL TRK60/3000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	3000	2755	20W	138	SA
190037 LenykNIL TRK60/4000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	4000	2875	20W	144	SA
190038 LenykNIL TRK60/5000/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	5000	2950	20W	148	SA
190039 LenykNIL TRK60/6500/20W/80/SA	636 x 125.1 x 84.1 ± 1mm	6500	2875	20W	144	SA
190040 LenykNIL TRK120/3000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	3445	21W	165	30°
190041 LenykNIL TRK120/4000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	3590	21W	171	30°
190042 LenykNIL TRK120/5000/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	3685	21W	176	30°
190043 LenykNIL TRK120/6500/21W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	3590	21W	171	30°
190044 LenykNIL TRK120/3000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	3420	21W	163	60°
190045 LenykNIL TRK120/4000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	3565	21W	170	60°
190046 LenykNIL TRK120/5000/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	3660	21W	175	60°
190047 LenykNIL TRK120/6500/21W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	3565	21W	170	60°
190048 LenykNIL TRK120/3000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	3435	21W	164	90°
190049 LenykNIL TRK120/4000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	3580	21W	171	90°
190050 LenykNIL TRK120/5000/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	3675	21W	175	90°
190051 LenykNIL TRK120/6500/21W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	3580	21W	171	90°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
190052 LenykNIL TRK120/3000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	3420	21W	163	DA
190053 LenykNIL TRK120/4000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	3565	21W	170	DA
190054 LenykNIL TRK120/5000/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	3660	21W	175	DA
190055 LenykNIL TRK120/6500/21W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	3565	21W	170	DA
190056 LenykNIL TRK120/3000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	3280	21W	157	SA
190057 LenykNIL TRK120/4000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	3415	21W	163	SA
190058 LenykNIL TRK120/5000/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	3510	21W	168	SA
190059 LenykNIL TRK120/6500/21W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	3415	21W	163	SA
190060 LenykNIL TRK120/3000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	5615	37W	152	30°
190061 LenykNIL TRK120/4000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	5850	37W	159	30°
190062 LenykNIL TRK120/5000/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	6010	37W	163	30°
190063 LenykNIL TRK120/6500/37W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	5850	37W	159	30°
190064 LenykNIL TRK120/3000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	5575	37W	151	60°
190065 LenykNIL TRK120/4000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	5810	37W	158	60°
190066 LenykNIL TRK120/5000/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	5965	37W	162	60°
190067 LenykNIL TRK120/6500/37W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	5810	37W	158	60°
190068 LenykNIL TRK120/3000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	5600	37W	152	90°
190069 LenykNIL TRK120/4000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	5835	37W	158	90°
190070 LenykNIL TRK120/5000/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	5995	37W	163	90°
190071 LenykNIL TRK120/6500/37W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	5835	37W	158	90°
190072 LenykNIL TRK120/3000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	5575	37W	151	DA
190073 LenykNIL TRK120/4000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	5810	37W	158	DA
190074 LenykNIL TRK120/5000/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	5965	37W	162	DA
190075 LenykNIL TRK120/6500/37W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	5810	37W	158	DA
190076 LenykNIL TRK120/3000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	5345	37W	145	SA
190077 LenykNIL TRK120/4000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	5570	37W	151	SA
190078 LenykNIL TRK120/5000/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	5720	37W	155	SA
190079 LenykNIL TRK120/6500/37W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	5570	37W	151	SA
190080 LenykNIL TRK120/3000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	6525	44W	149	30°
190081 LenykNIL TRK120/4000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	6800	44W	155	30°
190082 LenykNIL TRK120/5000/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	6985	44W	159	30°
190083 LenykNIL TRK120/6500/44W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	6800	44W	155	30°
190084 LenykNIL TRK120/3000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	6480	44W	148	60°
190085 LenykNIL TRK120/4000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	6750	44W	154	60°
190086 LenykNIL TRK120/5000/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	6935	44W	158	60°
190087 LenykNIL TRK120/6500/44W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	6750	44W	154	60°
190088 LenykNIL TRK120/3000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	6505	44W	148	90°
190089 LenykNIL TRK120/4000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	6780	44W	155	90°
190090 LenykNIL TRK120/5000/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	6965	44W	159	90°
190091 LenykNIL TRK120/6500/44W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	6780	44W	155	90°
190092 LenykNIL TRK120/3000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	6480	44W	148	DA
190093 LenykNIL TRK120/4000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	6750	44W	154	DA
190094 LenykNIL TRK120/5000/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	6935	44W	158	DA
190095 LenykNIL TRK120/6500/44W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	6750	44W	154	DA
190096 LenykNIL TRK120/3000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	6210	44W	142	SA
190097 LenykNIL TRK120/4000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	6475	44W	148	SA
190098 LenykNIL TRK120/5000/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	6650	44W	152	SA
190099 LenykNIL TRK120/6500/44W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	6475	44W	148	SA
190100 LenykNIL TRK120/3000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	3000	8050	50W	161	30°
190101 LenykNIL TRK120/4000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	4000	8390	50W	168	30°
190102 LenykNIL TRK120/5000/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	5000	8615	50W	173	30°
190103 LenykNIL TRK120/6500/50W/80/TB	1230 x 125.1 x 84.1 ± 1mm	6500	8390	50W	168	30°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
190104 LenykNIL TRK120/3000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	3000	7990	50W	160	60°
190105 LenykNIL TRK120/4000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	4000	8330	50W	167	60°
190106 LenykNIL TRK120/5000/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	5000	8555	50W	172	60°
190107 LenykNIL TRK120/6500/50W/80/NB	1230 x 125.1 x 84.1 ± 1mm	6500	8330	50W	167	60°
190108 LenykNIL TRK120/3000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	3000	8025	50W	161	90°
190109 LenykNIL TRK120/4000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	4000	8365	50W	168	90°
190110 LenykNIL TRK120/5000/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	5000	8590	50W	172	90°
190111 LenykNIL TRK120/6500/50W/80/WB	1230 x 125.1 x 84.1 ± 1mm	6500	8365	50W	168	90°
190112 LenykNIL TRK120/3000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	3000	7990	50W	160	DA
190113 LenykNIL TRK120/4000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	4000	8330	50W	167	DA
190114 LenykNIL TRK120/5000/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	5000	8555	50W	172	DA
190115 LenykNIL TRK120/6500/50W/80/DA	1230 x 125.1 x 84.1 ± 1mm	6500	8330	50W	167	DA
190116 LenykNIL TRK120/3000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	3000	7660	50W	154	SA
190117 LenykNIL TRK120/4000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	4000	7985	50W	160	SA
190118 LenykNIL TRK120/5000/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	5000	8200	50W	164	SA
190119 LenykNIL TRK120/6500/50W/80/SA	1230 x 125.1 x 84.1 ± 1mm	6500	7985	50W	160	SA
190120 LenykNIL TRK150/3000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	4150	26W	160	30°
190121 LenykNIL TRK150/4000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	4325	26W	167	30°
190122 LenykNIL TRK150/5000/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	4445	26W	171	30°
190123 LenykNIL TRK150/6500/26W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	4325	26W	167	30°
190124 LenykNIL TRK150/3000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	4120	26W	159	60°
190125 LenykNIL TRK150/4000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	4295	26W	166	60°
190126 LenykNIL TRK150/5000/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	4410	26W	170	60°
190127 LenykNIL TRK150/6500/26W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	4295	26W	166	60°
190128 LenykNIL TRK150/3000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	4140	26W	160	90°
190129 LenykNIL TRK150/4000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	4315	26W	166	90°
190130 LenykNIL TRK150/5000/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	4430	26W	171	90°
190131 LenykNIL TRK150/6500/26W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	4315	26W	166	90°
190132 LenykNIL TRK150/3000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	4120	26W	159	DA
190133 LenykNIL TRK150/4000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	4295	26W	166	DA
190134 LenykNIL TRK150/5000/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	4410	26W	170	DA
190135 LenykNIL TRK150/6500/26W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	4295	26W	166	DA
190136 LenykNIL TRK150/3000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	3950	26W	152	SA
190137 LenykNIL TRK150/4000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	4120	26W	159	SA
190138 LenykNIL TRK150/5000/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	4230	26W	163	SA
190139 LenykNIL TRK150/6500/26W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	4120	26W	159	SA
190140 LenykNIL TRK150/3000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	5445	35W	156	30°
190141 LenykNIL TRK150/4000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	5680	35W	163	30°
190142 LenykNIL TRK150/5000/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	5830	35W	167	30°
190143 LenykNIL TRK150/6500/35W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	5680	35W	163	30°
190144 LenykNIL TRK150/3000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	5360	35W	154	60°
190145 LenykNIL TRK150/4000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	5585	35W	160	60°
190146 LenykNIL TRK150/5000/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	5740	35W	164	60°
190147 LenykNIL TRK150/6500/35W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	5585	35W	160	60°
190148 LenykNIL TRK150/3000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	5385	35W	154	90°
190149 LenykNIL TRK150/4000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	5610	35W	161	90°
190150 LenykNIL TRK150/5000/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	5765	35W	165	90°
190151 LenykNIL TRK150/6500/35W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	5610	35W	161	90°
190152 LenykNIL TRK150/3000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	5360	35W	154	DA
190153 LenykNIL TRK150/4000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	5585	35W	160	DA
190154 LenykNIL TRK150/5000/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	5740	35W	164	DA
190155 LenykNIL TRK150/6500/35W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	5585	35W	160	DA

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
190156 LenykNIL TRK150/3000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	5115	35W	147	SA
190157 LenykNIL TRK150/4000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	5335	35W	153	SA
190158 LenykNIL TRK150/5000/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	5480	35W	157	SA
190159 LenykNIL TRK150/6500/35W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	5335	35W	153	SA
190160 LenykNIL TRK150/3000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	6905	45W	154	30°
190161 LenykNIL TRK150/4000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	7195	45W	160	30°
190162 LenykNIL TRK150/5000/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	7390	45W	165	30°
190163 LenykNIL TRK150/6500/45W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	7195	45W	160	30°
190164 LenykNIL TRK150/3000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	6795	45W	151	60°
190165 LenykNIL TRK150/4000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	7080	45W	158	60°
190166 LenykNIL TRK150/5000/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	7275	45W	162	60°
190167 LenykNIL TRK150/6500/45W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	7080	45W	158	60°
190168 LenykNIL TRK150/3000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	6825	45W	152	90°
190169 LenykNIL TRK150/4000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	7115	45W	159	90°
190170 LenykNIL TRK150/5000/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	7305	45W	163	90°
190171 LenykNIL TRK150/6500/45W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	7115	45W	159	90°
190172 LenykNIL TRK150/3000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	6795	45W	151	DA
190173 LenykNIL TRK150/4000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	7080	45W	158	DA
190174 LenykNIL TRK150/5000/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	7275	45W	162	DA
190175 LenykNIL TRK150/6500/45W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	7080	45W	158	DA
190176 LenykNIL TRK150/3000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	6485	45W	145	SA
190177 LenykNIL TRK150/4000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	6760	45W	151	SA
190178 LenykNIL TRK150/5000/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	6945	45W	155	SA
190179 LenykNIL TRK150/6500/45W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	6760	45W	151	SA
190180 LenykNIL TRK150/3000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	7785	53W	147	30°
190181 LenykNIL TRK150/4000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	8115	53W	154	30°
190182 LenykNIL TRK150/5000/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	8335	53W	158	30°
190183 LenykNIL TRK150/6500/53W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	8115	53W	154	30°
190184 LenykNIL TRK150/3000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	7665	53W	145	60°
190185 LenykNIL TRK150/4000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	7985	53W	151	60°
190186 LenykNIL TRK150/5000/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	8200	53W	155	60°
190187 LenykNIL TRK150/6500/53W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	7985	53W	151	60°
190188 LenykNIL TRK150/3000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	7695	53W	146	90°
190189 LenykNIL TRK150/4000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	8020	53W	152	90°
190190 LenykNIL TRK150/5000/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	8240	53W	156	90°
190191 LenykNIL TRK150/6500/53W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	8020	53W	152	90°
190192 LenykNIL TRK150/3000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	7665	53W	145	DA
190193 LenykNIL TRK150/4000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	7985	53W	151	DA
190194 LenykNIL TRK150/5000/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	8200	53W	155	DA
190195 LenykNIL TRK150/6500/53W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	7985	53W	151	DA
190196 LenykNIL TRK150/3000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	7315	53W	139	SA
190197 LenykNIL TRK150/4000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	7625	53W	144	SA
190198 LenykNIL TRK150/5000/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	7830	53W	148	SA
190199 LenykNIL TRK150/6500/53W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	7625	53W	144	SA
190200 LenykNIL TRK150/3000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	3000	9085	62W	147	30°
190201 LenykNIL TRK150/4000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	4000	9470	62W	153	30°
190202 LenykNIL TRK150/5000/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	5000	9725	62W	157	30°
190203 LenykNIL TRK150/6500/62W/80/TB	1527 x 125.1 x 84.1 ± 1mm	6500	9470	62W	153	30°
190204 LenykNIL TRK150/3000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	3000	9020	62W	146	60°
190205 LenykNIL TRK150/4000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	4000	9400	62W	152	60°
190206 LenykNIL TRK150/5000/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	5000	9655	62W	156	60°
190207 LenykNIL TRK150/6500/62W/80/NB	1527 x 125.1 x 84.1 ± 1mm	6500	9400	62W	152	60°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
190208 LenykNIL TRK150/3000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	3000	9060	62W	147	90°
190209 LenykNIL TRK150/4000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	4000	9440	62W	153	90°
190210 LenykNIL TRK150/5000/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	5000	9695	62W	157	90°
190211 LenykNIL TRK150/6500/62W/80/WB	1527 x 125.1 x 84.1 ± 1mm	6500	9440	62W	153	90°
190212 LenykNIL TRK150/3000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	3000	9020	62W	146	DA
190213 LenykNIL TRK150/4000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	4000	9400	62W	152	DA
190214 LenykNIL TRK150/5000/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	5000	9655	62W	156	DA
190215 LenykNIL TRK150/6500/62W/80/DA	1527 x 125.1 x 84.1 ± 1mm	6500	9400	62W	152	DA
190216 LenykNIL TRK150/3000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	3000	8650	62W	140	SA
190217 LenykNIL TRK150/4000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	4000	9015	62W	146	SA
190218 LenykNIL TRK150/5000/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	5000	9260	62W	150	SA
190219 LenykNIL TRK150/6500/62W/80/SA	1527 x 125.1 x 84.1 ± 1mm	6500	9015	62W	146	SA