



Kaypro Phonic-Absorbent

SURFACE MOUNTED & SUSPENDED | ECO-DALI EM SERIES

Kaypro PA is a sleek, minimalist luminaire, proven to provide high visual comfort and sound-absorption. Especially suitable for noisy offices, call-centers or companies that sell sound equipment. Promoting the smart lighting technology, this luminaire distributes the light in a pleasant way while contributing to a harmonious working atmosphere.

The Kaypro PA SM Family has several series, determined by various add-on and controls:


- Kaypro PA SM TEC the standard sound-absorbent for office spaces
- Kaypro PA SM TEC EM with emergency kits of 1h and 3h
- Kaypro PA SM ECO-DALI with DALI control option for illumination adjustments
- Kaypro PA SM ECO-DALI EM with both dimming and emergency

FEATURES & BENEFITS

- Sound-absorbent: the noise reduction coefficient is 0.4, meaning reflected noise is reduced by 40% (as measured by ISO 354:2004 and ISO 11654:2005)
- Easy to install into a variety of ceiling types due to its modular concept
- Several color temperatures: 3000K, 4000K, 5000K and 6500K
- CRI 80 as standard
- Long rated life: L90/B10@50,000h
- Luminaire efficiency: 110 lm/W @4000K
- Equipped with 1h & 3h emergency kit
- UGR: 18-19

APPLICATION

Office | Healthcare | Hospitality | DIY

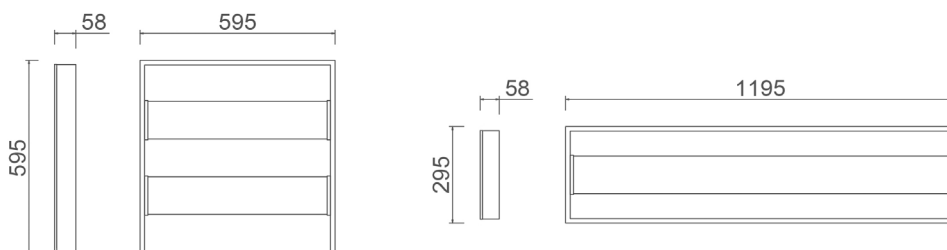


Specificații

Power consumption	32W, 38W, 50W	
Dimensions	595 x 595 x 58 ± 1mm	1195 x 295 x 58 ± 1mm
Weight	6.3 - 6.4Kg	6.3 - 6.4Kg
Housing materials	Steel sheet & Polycarbonate	
IK code	IK04	
THD (at 230V, 50Hz, Full load)	<8%	
Protection class	Safety class 1	
Operating temperature [°C]	+5C...+45C/+41F...+113F	
Operating humidity [%]	10 ÷ 85	
Power factor	≥0.95	
AC Input [Vac]	220 - 240 VAC	
Lens angle [°]	100°	
Lifespan [h]	50,000	
Housing color	○ RAL 9003 - Signal white	
Lumen maintenance	L90/B10@50.000h at 25°C	
IP factor	IP20	
Control optional	ECO-DALI	
Warranty [years]	5	
Storage temperature range [°C]	+5C ÷ +25C/+41F...+77F	
Emergency option	EM1H, EM3H	
Phonic absorption [αW]	0.4	

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION



A110

RISK GROUP**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

BATTERY WARRANTY

TEC EM & ECO EM: 12 months warranty

TEC & ECO: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
211360 Kaypro 2L 6060/SM/3000/32W/80/PA/EM1H	595 x 595 x 58 ± 1mm	3000	3350	32W	105	100°
211361 Kaypro 2L 6060/SM/4000/32W/80/PA/EM1H	595 x 595 x 58 ± 1mm	4000	3490	32W	110	100°
211362 Kaypro 2L 6060/SM/5000/32W/80/PA/EM1H	595 x 595 x 58 ± 1mm	5000	3585	32W	113	100°
211363 Kaypro 2L 6060/SM/6500/32W/80/PA/EM1H	595 x 595 x 58 ± 1mm	6500	3490	32W	110	100°
211364 Kaypro 2L 6060/SM/3000/38W/80/PA/EM1H	595 x 595 x 58 ± 1mm	3000	3940	38W	104	100°
211365 Kaypro 2L 6060/SM/4000/38W/80/PA/EM1H	595 x 595 x 58 ± 1mm	4000	4105	38W	109	100°
211366 Kaypro 2L 6060/SM/5000/38W/80/PA/EM1H	595 x 595 x 58 ± 1mm	5000	4215	38W	111	100°
211367 Kaypro 2L 6060/SM/6500/38W/80/PA/EM1H	595 x 595 x 58 ± 1mm	6500	4105	38W	109	100°
211368 Kaypro 2L 6060/SM/3000/50W/80/PA/EM1H	595 x 595 x 58 ± 1mm	3000	4825	50W	97	100°
211369 Kaypro 2L 6060/SM/4000/50W/80/PA/EM1H	595 x 595 x 58 ± 1mm	4000	5030	50W	101	100°
211370 Kaypro 2L 6060/SM/5000/50W/80/PA/EM1H	595 x 595 x 58 ± 1mm	5000	5165	50W	104	100°
211371 Kaypro 2L 6060/SM/6500/50W/80/PA/EM1H	595 x 595 x 58 ± 1mm	6500	5030	50W	101	100°
211432 Kaypro 2L 6060/SM/3000/32W/80/PA/EM3H	595 x 595 x 58 ± 1mm	3000	3350	32W	105	100°
211433 Kaypro 2L 6060/SM/4000/32W/80/PA/EM3H	595 x 595 x 58 ± 1mm	4000	3490	32W	110	100°
211434 Kaypro 2L 6060/SM/5000/32W/80/PA/EM3H	595 x 595 x 58 ± 1mm	5000	3585	32W	113	100°
211435 Kaypro 2L 6060/SM/6500/32W/80/PA/EM3H	595 x 595 x 58 ± 1mm	6500	3490	32W	110	100°
211436 Kaypro 2L 6060/SM/3000/38W/80/PA/EM3H	595 x 595 x 58 ± 1mm	3000	3940	38W	104	100°
211437 Kaypro 2L 6060/SM/4000/38W/80/PA/EM3H	595 x 595 x 58 ± 1mm	4000	4105	38W	109	100°
211438 Kaypro 2L 6060/SM/5000/38W/80/PA/EM3H	595 x 595 x 58 ± 1mm	5000	4215	38W	111	100°
211439 Kaypro 2L 6060/SM/6500/38W/80/PA/EM3H	595 x 595 x 58 ± 1mm	6500	4105	38W	109	100°
211440 Kaypro 2L 6060/SM/3000/50W/80/PA/EM3H	595 x 595 x 58 ± 1mm	3000	4825	50W	97	100°
211441 Kaypro 2L 6060/SM/4000/50W/80/PA/EM3H	595 x 595 x 58 ± 1mm	4000	5030	50W	101	100°
211442 Kaypro 2L 6060/SM/5000/50W/80/PA/EM3H	595 x 595 x 58 ± 1mm	5000	5165	50W	104	100°
211443 Kaypro 2L 6060/SM/6500/50W/80/PA/EM3H	595 x 595 x 58 ± 1mm	6500	5030	50W	101	100°
211384 Kaypro 1L 12030/SM/3000/32W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	3000	3350	32W	105	100°
211385 Kaypro 1L 12030/SM/4000/32W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	4000	3490	32W	110	100°
211386 Kaypro 1L 12030/SM/5000/32W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	5000	3585	32W	113	100°
211387 Kaypro 1L 12030/SM/6500/32W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	6500	3490	32W	110	100°
211388 Kaypro 1L 12030/SM/3000/38W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	3000	3940	38W	104	100°
211389 Kaypro 1L 12030/SM/4000/38W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	4000	4105	38W	109	100°
211390 Kaypro 1L 12030/SM/5000/38W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	5000	4215	38W	111	100°
211391 Kaypro 1L 12030/SM/6500/38W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	6500	4105	38W	109	100°
211392 Kaypro 1L 12030/SM/3000/50W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	3000	4825	50W	97	100°
211393 Kaypro 1L 12030/SM/4000/50W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	4000	5030	50W	101	100°
211394 Kaypro 1L 12030/SM/5000/50W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	5000	5165	50W	104	100°
211395 Kaypro 1L 12030/SM/6500/50W/80/PA/EM1H	1195 x 295 x 58 ± 1mm	6500	5030	50W	101	100°
211456 Kaypro 1L 12030/SM/3000/32W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	3000	3350	32W	105	100°
211457 Kaypro 1L 12030/SM/4000/32W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	4000	3490	32W	110	100°
211458 Kaypro 1L 12030/SM/5000/32W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	5000	3585	32W	113	100°
211459 Kaypro 1L 12030/SM/6500/32W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	6500	3490	32W	110	100°
211460 Kaypro 1L 12030/SM/3000/38W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	3000	3940	38W	104	100°
211461 Kaypro 1L 12030/SM/4000/38W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	4000	4105	38W	109	100°
211462 Kaypro 1L 12030/SM/5000/38W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	5000	4215	38W	111	100°
211463 Kaypro 1L 12030/SM/6500/38W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	6500	4105	38W	109	100°
211464 Kaypro 1L 12030/SM/3000/50W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	3000	4825	50W	97	100°
211465 Kaypro 1L 12030/SM/4000/50W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	4000	5030	50W	101	100°
211466 Kaypro 1L 12030/SM/5000/50W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	5000	5165	50W	104	100°
211467 Kaypro 1L 12030/SM/6500/50W/80/PA/EM3H	1195 x 295 x 58 ± 1mm	6500	5030	50W	101	100°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: November 6, 2017 6:33 PM. www.greentek.eu