

## Lenyk IL

### SURFACED MOUNTED & SUSPENDED | ECO-DALI SERIES

Lenyk IL is a flexible luminaire suitable to fulfill a wide range of lighting tasks in the industrial or retail sectors. With various luminous flux packages and optics. Lenyk IL has LED modules encased in individual lenses, placed within a sleek and modern aluminum housing that merges with all the industrial environments. The individual lenses ensure that the beam can be precisely targeted towards the desired objects, irrespective of the mounting height. This features brings the benefit of little-wasted light, and thus, of lower energy usage.

Lenyk IL has several series, determined by various add-on and control:


- Lenyk IL TEC: the standard for industrial, DIY and retail spaces
- **Lenyk IL ECO-DALI: with DALI dimming**
- Lenyk IL TEC EM: with emergency lighting kit
- Lenyk IL ECO-DALI EM: with dimming and emergency kit

### FEATURES & BENEFITS

- CRI  $\geq$  80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: WB (Wide Beam - 90°), NB (Narrow Beam - 60°), TB (Tight Beam - 30°), DA (Double Asymmetric)

### APPLICATION

Grocery & Supermarket | Retail | DIY

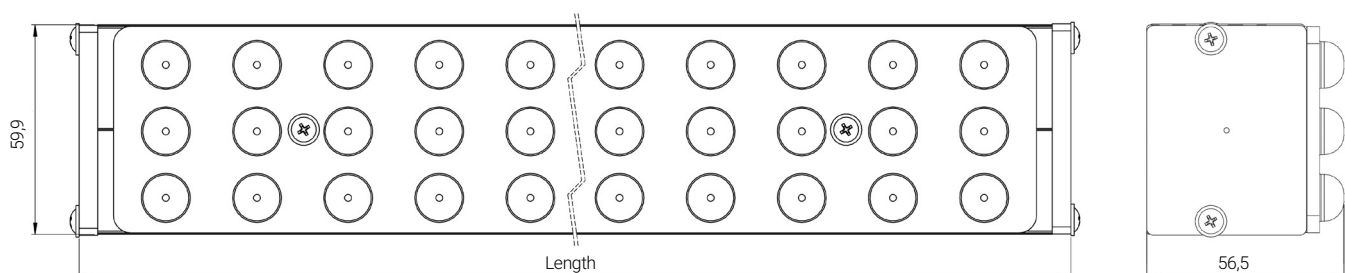


**SPECIFICATIONS**

Power consumption	20W	20W, 34W, 41W, 49W	25W, 33W, 42W, 51W, 60W
Dimensions	607 x 56.5 x 59.9 ± 1mm	1201 x 56.5 x 59.9 ± 1mm	1498 x 56.5 x 59.9 ± 1mm
Weight	1.6Kg	2.5Kg	3.0Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20 ... +45 °C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	ECO-DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20...+55°C / -4F ... +131F		
Emergency option	For product information please see <b>Lenyk IL ECO-DALI EM</b> datasheet		

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

**LIGHT DISTRIBUTION**

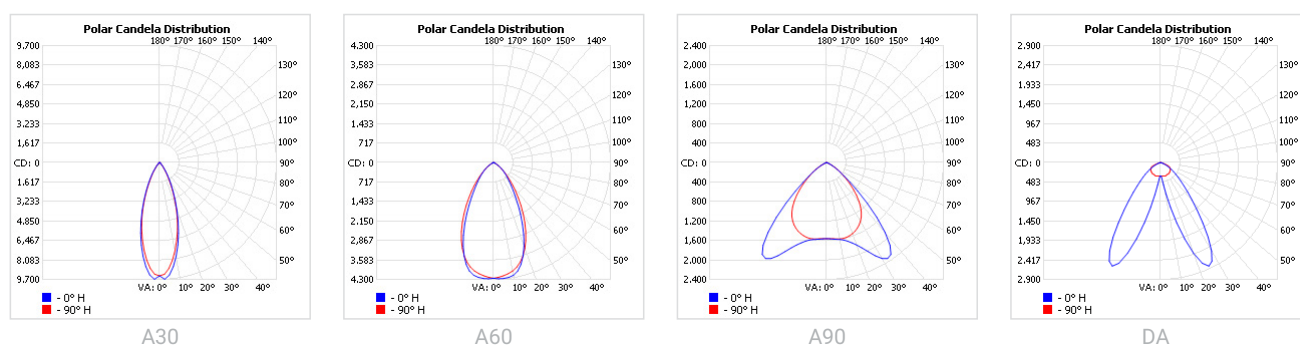

**RISK GROUP****RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**TOLERANCES**

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

**BATTERY WARRANTY**

**TEC EM & ECO EM:** 12 months warranty

**TEC & ECO:** -

**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
216508 Lenyk IL 60/3000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	3000	2890	20W	145	90°
216509 Lenyk IL 60/4000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	4000	3010	20W	151	90°
216510 Lenyk IL 60/5000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	5000	3090	20W	155	90°
216511 Lenyk IL 60/6500/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	6500	3010	20W	151	90°
216800 Lenyk IL 60/3000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	60°
216801 Lenyk IL 60/4000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	60°
216802 Lenyk IL 60/5000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	60°
216803 Lenyk IL 60/6500/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	60°
216804 Lenyk IL 60/3000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	3000	2895	20W	145	30°
216805 Lenyk IL 60/4000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	4000	3020	20W	151	30°
216806 Lenyk IL 60/5000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	5000	3100	20W	155	30°
216807 Lenyk IL 60/6500/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	6500	3020	20W	151	30°
216808 Lenyk IL 60/3000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	DA
216809 Lenyk IL 60/4000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	DA
216810 Lenyk IL 60/5000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	DA
216811 Lenyk IL 60/6500/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	DA
216196 Lenyk IL 120/3000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	3280	20W	164	30°
216197 Lenyk IL 120/4000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	3420	20W	171	30°
216198 Lenyk IL 120/5000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	3510	20W	176	30°
216199 Lenyk IL 120/6500/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	3420	20W	171	30°
216000 Lenyk IL 120/3000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	60°
216001 Lenyk IL 120/4000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	60°
216002 Lenyk IL 120/5000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	60°
216003 Lenyk IL 120/6500/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	60°
216004 Lenyk IL 120/3000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	3270	20W	164	90°
216005 Lenyk IL 120/4000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	3410	20W	171	90°
216006 Lenyk IL 120/5000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	3500	20W	175	90°
216007 Lenyk IL 120/6500/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	3410	20W	171	90°
216008 Lenyk IL 120/3000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	DA
216009 Lenyk IL 120/4000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	DA
216010 Lenyk IL 120/5000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	DA
216011 Lenyk IL 120/6500/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	DA
216200 Lenyk IL 120/3000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	5190	34W	153	30°
216201 Lenyk IL 120/4000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	5410	34W	160	30°
216202 Lenyk IL 120/5000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	5555	34W	164	30°
216203 Lenyk IL 120/6500/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	5410	34W	160	30°
216012 Lenyk IL 120/3000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	60°
216013 Lenyk IL 120/4000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	60°
216014 Lenyk IL 120/5000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	60°
216015 Lenyk IL 120/6500/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	60°
216016 Lenyk IL 120/3000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	5175	34W	153	90°
216017 Lenyk IL 120/4000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	5395	34W	159	90°
216018 Lenyk IL 120/5000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	5540	34W	163	90°
216019 Lenyk IL 120/6500/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	5395	34W	159	90°
216020 Lenyk IL 120/3000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	DA
216021 Lenyk IL 120/4000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	DA
216022 Lenyk IL 120/5000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	DA
216023 Lenyk IL 120/6500/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	DA
216204 Lenyk IL 120/3000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	6080	41W	149	30°
216205 Lenyk IL 120/4000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	6335	41W	155	30°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
216206 Lenyk IL 120/5000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	6510	41W	159	30°
216207 Lenyk IL 120/6500/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	6335	41W	155	30°
216024 Lenyk IL 120/3000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	60°
216025 Lenyk IL 120/4000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	60°
216026 Lenyk IL 120/5000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	60°
216027 Lenyk IL 120/6500/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	60°
216028 Lenyk IL 120/3000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	6065	41W	148	90°
216029 Lenyk IL 120/4000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	6320	41W	155	90°
216030 Lenyk IL 120/5000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	6490	41W	159	90°
216031 Lenyk IL 120/6500/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	6320	41W	155	90°
216032 Lenyk IL 120/3000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	DA
216033 Lenyk IL 120/4000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	DA
216034 Lenyk IL 120/5000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	DA
216035 Lenyk IL 120/6500/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	DA
216208 Lenyk IL 120/3000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	7885	49W	161	30°
216209 Lenyk IL 120/4000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	8220	49W	168	30°
216210 Lenyk IL 120/5000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	8445	49W	173	30°
216211 Lenyk IL 120/6500/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	8220	49W	168	30°
216036 Lenyk IL 120/3000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	60°
216037 Lenyk IL 120/4000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	60°
216038 Lenyk IL 120/5000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	60°
216039 Lenyk IL 120/6500/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	60°
216040 Lenyk IL 120/3000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	7865	49W	161	90°
216041 Lenyk IL 120/4000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	8200	49W	168	90°
216042 Lenyk IL 120/5000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	8420	49W	172	90°
216043 Lenyk IL 120/6500/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	8200	49W	168	90°
216044 Lenyk IL 120/3000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	DA
216045 Lenyk IL 120/4000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	DA
216046 Lenyk IL 120/5000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	DA
216047 Lenyk IL 120/6500/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	DA
216180 Lenyk IL 150/3000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	3990	25W	160	30°
216181 Lenyk IL 150/4000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	4160	25W	167	30°
216182 Lenyk IL 150/5000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	4275	25W	171	30°
216183 Lenyk IL 150/6500/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	4160	25W	167	30°
216184 Lenyk IL 150/3000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	60°
216185 Lenyk IL 150/4000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	60°
216186 Lenyk IL 150/5000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	60°
216187 Lenyk IL 150/6500/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	60°
216188 Lenyk IL 150/3000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	3980	25W	160	90°
216189 Lenyk IL 150/4000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	4150	25W	166	90°
216190 Lenyk IL 150/5000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	4260	25W	171	90°
216191 Lenyk IL 150/6500/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	4150	25W	166	90°
216192 Lenyk IL 150/3000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	DA
216193 Lenyk IL 150/4000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	DA
216194 Lenyk IL 150/5000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	DA
216195 Lenyk IL 150/6500/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	DA
216212 Lenyk IL 150/3000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	5045	33W	153	30°
216213 Lenyk IL 150/4000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	5260	33W	160	30°
216214 Lenyk IL 150/5000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	5400	33W	164	30°
216215 Lenyk IL 150/6500/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	5260	33W	160	30°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
216048 Lenyk IL 150/3000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	60°
216049 Lenyk IL 150/4000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	60°
216050 Lenyk IL 150/5000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	60°
216051 Lenyk IL 150/6500/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	60°
216052 Lenyk IL 150/3000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	4985	33W	152	90°
216053 Lenyk IL 150/4000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	5195	33W	158	90°
216054 Lenyk IL 150/5000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	5340	33W	162	90°
216055 Lenyk IL 150/6500/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	5195	33W	158	90°
216056 Lenyk IL 150/3000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	DA
216057 Lenyk IL 150/4000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	DA
216058 Lenyk IL 150/5000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	DA
216059 Lenyk IL 150/6500/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	DA
216216 Lenyk IL 150/3000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	6445	42W	154	30°
216217 Lenyk IL 150/4000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	6720	42W	160	30°
216218 Lenyk IL 150/5000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	6900	42W	165	30°
216219 Lenyk IL 150/6500/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	6720	42W	160	30°
216060 Lenyk IL 150/3000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	60°
216061 Lenyk IL 150/4000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	60°
216062 Lenyk IL 150/5000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	60°
216063 Lenyk IL 150/6500/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	60°
216064 Lenyk IL 150/3000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	6370	42W	152	90°
216065 Lenyk IL 150/4000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	6640	42W	159	90°
216066 Lenyk IL 150/5000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	6820	42W	163	90°
216067 Lenyk IL 150/6500/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	6640	42W	159	90°
216068 Lenyk IL 150/3000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	DA
216069 Lenyk IL 150/4000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	DA
216070 Lenyk IL 150/5000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	DA
216071 Lenyk IL 150/6500/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	DA
216220 Lenyk IL 150/3000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	7495	51W	147	30°
216221 Lenyk IL 150/4000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	7810	51W	154	30°
216222 Lenyk IL 150/5000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	8020	51W	158	30°
216223 Lenyk IL 150/6500/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	7810	51W	154	30°
216072 Lenyk IL 150/3000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	145	60°
216073 Lenyk IL 150/4000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	151	60°
216074 Lenyk IL 150/5000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	155	60°
216075 Lenyk IL 150/6500/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	151	60°
216076 Lenyk IL 150/3000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	7405	51W	146	90°
216077 Lenyk IL 150/4000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	7720	51W	152	90°
216078 Lenyk IL 150/5000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	7930	51W	156	90°
216079 Lenyk IL 150/6500/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	7720	51W	152	90°
216080 Lenyk IL 150/3000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	139	DA
216081 Lenyk IL 150/4000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	144	DA
216082 Lenyk IL 150/5000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	148	DA
216083 Lenyk IL 150/6500/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	144	DA
216224 Lenyk IL 150/3000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	8790	60W	147	30°
216225 Lenyk IL 150/4000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	9160	60W	153	30°
216226 Lenyk IL 150/5000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	9410	60W	157	30°
216227 Lenyk IL 150/6500/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	9160	60W	153	30°
216084 Lenyk IL 150/3000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	60°
216085 Lenyk IL 150/4000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	60°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
216086 Lenyk IL 150/5000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	60°
216087 Lenyk IL 150/6500/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	60°
216088 Lenyk IL 150/3000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	8765	60W	147	90°
216089 Lenyk IL 150/4000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	9135	60W	153	90°
216090 Lenyk IL 150/5000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	9385	60W	157	90°
216091 Lenyk IL 150/6500/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	9135	60W	153	90°
216092 Lenyk IL 150/3000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	DA
216093 Lenyk IL 150/4000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	DA
216094 Lenyk IL 150/5000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	DA
216095 Lenyk IL 150/6500/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	DA
261508 Lenyk IL/S 60/3000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	3000	2890	20W	145	90°
261509 Lenyk IL/S 60/4000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	4000	3010	20W	151	90°
261510 Lenyk IL/S 60/5000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	5000	3090	20W	155	90°
261511 Lenyk IL/S 60/6500/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	6500	3010	20W	151	90°
261800 Lenyk IL/S 60/3000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	60°
261801 Lenyk IL/S 60/4000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	60°
261802 Lenyk IL/S 60/5000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	60°
261803 Lenyk IL/S 60/6500/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	60°
261804 Lenyk IL/S 60/3000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	3000	2895	20W	145	30°
261805 Lenyk IL/S 60/4000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	4000	3020	20W	151	30°
261806 Lenyk IL/S 60/5000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	5000	3100	20W	155	30°
261807 Lenyk IL/S 60/6500/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	6500	3020	20W	151	30°
261808 Lenyk IL/S 60/3000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	DA
261809 Lenyk IL/S 60/4000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	DA
261810 Lenyk IL/S 60/5000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	DA
261811 Lenyk IL/S 60/6500/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	DA
261196 Lenyk IL/S 120/3000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	3280	20W	164	30°
261197 Lenyk IL/S 120/4000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	3420	20W	171	30°
261198 Lenyk IL/S 120/5000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	3510	20W	176	30°
261199 Lenyk IL/S 120/6500/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	3420	20W	171	30°
261000 Lenyk IL/S 120/3000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	60°
261001 Lenyk IL/S 120/4000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	60°
261002 Lenyk IL/S 120/5000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	60°
261003 Lenyk IL/S 120/6500/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	60°
261004 Lenyk IL/S 120/3000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	3270	20W	164	90°
261005 Lenyk IL/S 120/4000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	3410	20W	171	90°
261006 Lenyk IL/S 120/5000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	3500	20W	175	90°
261007 Lenyk IL/S 120/6500/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	3410	20W	171	90°
261008 Lenyk IL/S 120/3000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	DA
261009 Lenyk IL/S 120/4000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	DA
261010 Lenyk IL/S 120/5000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	DA
261011 Lenyk IL/S 120/6500/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	DA
261200 Lenyk IL/S 120/3000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	5190	34W	153	30°
261201 Lenyk IL/S 120/4000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	5410	34W	160	30°
261202 Lenyk IL/S 120/5000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	5555	34W	164	30°
261203 Lenyk IL/S 120/6500/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	5410	34W	160	30°
261012 Lenyk IL/S 120/3000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	60°
261013 Lenyk IL/S 120/4000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	60°
261014 Lenyk IL/S 120/5000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	60°
261015 Lenyk IL/S 120/6500/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	60°



## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
261016 Lenyk IL/S 120/3000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	5175	34W	153	90°
261017 Lenyk IL/S 120/4000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	5395	34W	159	90°
261018 Lenyk IL/S 120/5000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	5540	34W	163	90°
261019 Lenyk IL/S 120/6500/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	5395	34W	159	90°
261020 Lenyk IL/S 120/3000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	DA
261021 Lenyk IL/S 120/4000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	DA
261022 Lenyk IL/S 120/5000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	DA
261023 Lenyk IL/S 120/6500/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	DA
261204 Lenyk IL/S 120/3000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	6080	41W	149	30°
261205 Lenyk IL/S 120/4000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	6335	41W	155	30°
261206 Lenyk IL/S 120/5000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	6510	41W	159	30°
261207 Lenyk IL/S 120/6500/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	6335	41W	155	30°
261024 Lenyk IL/S 120/3000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	60°
261025 Lenyk IL/S 120/4000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	60°
261026 Lenyk IL/S 120/5000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	60°
261027 Lenyk IL/S 120/6500/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	60°
261028 Lenyk IL/S 120/3000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	6065	41W	148	90°
261029 Lenyk IL/S 120/4000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	6320	41W	155	90°
261030 Lenyk IL/S 120/5000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	6490	41W	159	90°
261031 Lenyk IL/S 120/6500/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	6320	41W	155	90°
261032 Lenyk IL/S 120/3000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	DA
261033 Lenyk IL/S 120/4000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	DA
261034 Lenyk IL/S 120/5000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	DA
261035 Lenyk IL/S 120/6500/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	DA
261208 Lenyk IL/S 120/3000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	7885	49W	161	30°
261209 Lenyk IL/S 120/4000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	8220	49W	168	30°
261210 Lenyk IL/S 120/5000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	8445	49W	173	30°
261211 Lenyk IL/S 120/6500/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	8220	49W	168	30°
261036 Lenyk IL/S 120/3000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	60°
261037 Lenyk IL/S 120/4000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	60°
261038 Lenyk IL/S 120/5000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	60°
261039 Lenyk IL/S 120/6500/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	60°
261040 Lenyk IL/S 120/3000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	7865	49W	161	90°
261041 Lenyk IL/S 120/4000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	8200	49W	168	90°
261042 Lenyk IL/S 120/5000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	8420	49W	172	90°
261043 Lenyk IL/S 120/6500/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	8200	49W	168	90°
261044 Lenyk IL/S 120/3000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	DA
261045 Lenyk IL/S 120/4000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	DA
261046 Lenyk IL/S 120/5000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	DA
261047 Lenyk IL/S 120/6500/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	DA
261180 Lenyk IL/S 150/3000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	3990	25W	160	30°
261181 Lenyk IL/S 150/4000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	4160	25W	167	30°
261182 Lenyk IL/S 150/5000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	4275	25W	171	30°
261183 Lenyk IL/S 150/6500/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	4160	25W	167	30°
261184 Lenyk IL/S 150/3000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	60°
261185 Lenyk IL/S 150/4000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	60°
261186 Lenyk IL/S 150/5000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	60°
261187 Lenyk IL/S 150/6500/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	60°
261188 Lenyk IL/S 150/3000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	3980	25W	160	90°
261189 Lenyk IL/S 150/4000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	4150	25W	166	90°



## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
261190 Lenyk IL/S 150/5000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	4260	25W	171	90°
261191 Lenyk IL/S 150/6500/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	4150	25W	166	90°
261192 Lenyk IL/S 150/3000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	DA
261193 Lenyk IL/S 150/4000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	DA
261194 Lenyk IL/S 150/5000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	DA
261195 Lenyk IL/S 150/6500/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	DA
261212 Lenyk IL/S 150/3000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	5045	33W	153	30°
261213 Lenyk IL/S 150/4000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	5260	33W	160	30°
261214 Lenyk IL/S 150/5000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	5400	33W	164	30°
261215 Lenyk IL/S 150/6500/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	5260	33W	160	30°
261048 Lenyk IL/S 150/3000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	60°
261049 Lenyk IL/S 150/4000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	60°
261050 Lenyk IL/S 150/5000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	60°
261051 Lenyk IL/S 150/6500/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	60°
261052 Lenyk IL/S 150/3000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	4985	33W	152	90°
261053 Lenyk IL/S 150/4000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	5195	33W	158	90°
261054 Lenyk IL/S 150/5000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	5340	33W	162	90°
261055 Lenyk IL/S 150/6500/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	5195	33W	158	90°
261056 Lenyk IL/S 150/3000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	DA
261057 Lenyk IL/S 150/4000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	DA
261058 Lenyk IL/S 150/5000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	DA
261059 Lenyk IL/S 150/6500/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	DA
261216 Lenyk IL/S 150/3000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	6445	42W	154	30°
261217 Lenyk IL/S 150/4000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	6720	42W	160	30°
261218 Lenyk IL/S 150/5000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	6900	42W	165	30°
261219 Lenyk IL/S 150/6500/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	6720	42W	160	30°
261060 Lenyk IL/S 150/3000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	60°
261061 Lenyk IL/S 150/4000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	60°
261062 Lenyk IL/S 150/5000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	60°
261063 Lenyk IL/S 150/6500/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	60°
261064 Lenyk IL/S 150/3000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	6370	42W	152	90°
261065 Lenyk IL/S 150/4000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	6640	42W	159	90°
261066 Lenyk IL/S 150/5000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	6820	42W	163	90°
261067 Lenyk IL/S 150/6500/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	6640	42W	159	90°
261068 Lenyk IL/S 150/3000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	DA
261069 Lenyk IL/S 150/4000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	DA
261070 Lenyk IL/S 150/5000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	DA
261071 Lenyk IL/S 150/6500/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	DA
261220 Lenyk IL/S 150/3000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	7495	51W	147	30°
261221 Lenyk IL/S 150/4000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	7810	51W	154	30°
261222 Lenyk IL/S 150/5000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	8020	51W	158	30°
261223 Lenyk IL/S 150/6500/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	7810	51W	154	30°
261072 Lenyk IL/S 150/3000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	145	60°
261073 Lenyk IL/S 150/4000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	151	60°
261074 Lenyk IL/S 150/5000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	155	60°
261075 Lenyk IL/S 150/6500/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	151	60°
261076 Lenyk IL/S 150/3000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	7405	51W	146	90°
261077 Lenyk IL/S 150/4000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	7720	51W	152	90°
261078 Lenyk IL/S 150/5000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	7930	51W	156	90°
261079 Lenyk IL/S 150/6500/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	7720	51W	152	90°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
261080 Lenyk IL/S 150/3000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	139	DA
261081 Lenyk IL/S 150/4000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	144	DA
261082 Lenyk IL/S 150/5000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	148	DA
261083 Lenyk IL/S 150/6500/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	144	DA
261224 Lenyk IL/S 150/3000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	8790	60W	147	30°
261225 Lenyk IL/S 150/4000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	9160	60W	153	30°
261226 Lenyk IL/S 150/5000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	9410	60W	157	30°
261227 Lenyk IL/S 150/6500/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	9160	60W	153	30°
261084 Lenyk IL/S 150/3000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	60°
261085 Lenyk IL/S 150/4000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	60°
261086 Lenyk IL/S 150/5000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	60°
261087 Lenyk IL/S 150/6500/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	60°
261088 Lenyk IL/S 150/3000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	8765	60W	147	90°
261089 Lenyk IL/S 150/4000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	9135	60W	153	90°
261090 Lenyk IL/S 150/5000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	9385	60W	157	90°
261091 Lenyk IL/S 150/6500/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	9135	60W	153	90°
261092 Lenyk IL/S 150/3000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	DA
261093 Lenyk IL/S 150/4000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	DA
261094 Lenyk IL/S 150/5000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	DA
261095 Lenyk IL/S 150/6500/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	DA