



Ennio SM Individual Lens

SURFACE MOUNTED | DALI EM SERIES

Ennio SM Individual Lens is a versatile suspended luminaire. Ennio creates a mellow ambient, pleasant light, appropriate for office environments in particular. It can be equipped with dimming and emergency kits.

Ennio SM Individual Lens has several series, determined by various add-on and controls:


- Ennio SM Individual Lens Non-DALI: the standard version
- Ennio SM Individual Lens Non-DALI EM: the standard version with emergency option
- Ennio SM Individual Lens DALI: with DALI controls for illumination adjustments
- **Ennio SM Individual Lens DALI EM: with DALI controls for illumination adjustments and emergency options**

FEATURES & BENEFITS

- CRI 80 as standard
- Color temperatures: 2200K, 2700K, 3000K, 4000K
- Long rated life: L90/B10@50.000h
- Luminaire efficiency 129 lm/W @4000K

APPLICATION

Office | Healthcare | Hospitality | DIY

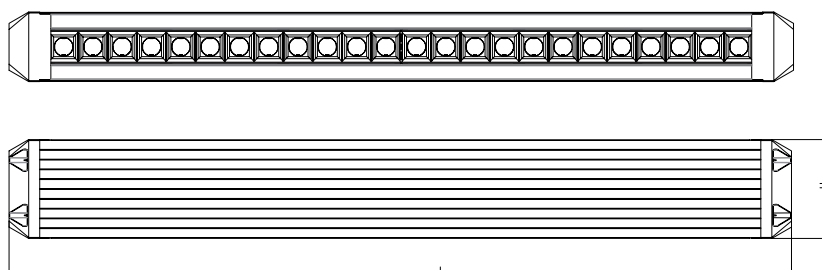


SPECIFICATIONS

Power consumption (W)	19W, 22W, 26W, 30W	23W, 28W, 32W, 36W
Dimensions (mm)	1189 x 57 x 81 ± 1mm	1476 x 57 x 81 ± 1mm
Weight (kg)	3.4 kg / 3.5 kg	4 kg / 4.1 kg
DALI addresses	1 address	1 address
Housing materials	Aluminum & Polycarbonate	
IK code	IK02	
THD (at 230V, 50Hz, Full load)	<9%	
Protection class	Safety class 1	
Operating temperature [°C]	+5C...+45C/+41F...+113F	
Operating humidity [%]	10 ÷ 85	
Power factor	≥0.95	
AC Input [Vac]	220 - 240 VAC	
Lens angle [°] (UP/DOWN)	15°, 21°, 28°, 46°, 57°	
Lifespan [h]	50.000	
Housing color	○ White - RAL 9003, ● Anodised black	
Lumen maintenance	L90/B10@50.000h at 25°C	
IP factor	IP20	
Control optional	DALI	
Warranty [years]	5	
Storage temperature range [°C]	+5...+25/+41F...+77F	
Emergency option	EM1H / EM3H	


Light application	Standard
CRI	CRI 80
CCT [K]	2200K, 2700K, 3000K, 4000K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency


LIGHT DISTRIBUTION




15°




21°



28°



46°



57°

TOLERANCES

Luminous flux tolerances: -/+ 5%

Consumption tolerance: -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM

BATTERY WARRANTY

Non-DALI EM & DALI EM: 12 months warranty

Non-DALI & DALI: -

MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT

Power	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
< 50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
< 80W	DALI	27	21	13	45	35	21

RISK GROUP

Standard (CRI80)	RG1
FOOD (BVF, FBS, FSM)	RG1
FOOD ≤35W (FZM, FSH)	RG1
FOOD >35W (FZM, FSH)	RG2
FAS	RG1
AMB2200	RG1
ART	RG1
AGI	RG1
CRI90	RG1
CRI95	RG1
ENT	RG1

RG1

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30620 EnnioSM 120SM/2200/19W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1690	19W	89	15°
2B30621 EnnioSM 120SM/2700/19W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2195	19W	116	15°
2B30622 EnnioSM 120SM/3000/19W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2355	19W	124	15°
2B30623 EnnioSM 120SM/4000/19W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2355	19W	124	15°
2B30624 EnnioSM 120SM/2200/19W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1710	19W	90	21°
2B30625 EnnioSM 120SM/2700/19W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2215	19W	117	21°
2B30626 EnnioSM 120SM/3000/19W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2375	19W	125	21°
2B30627 EnnioSM 120SM/4000/19W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2375	19W	125	21°
2B30628 EnnioSM 120SM/2200/19W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1640	19W	87	28°
2B30629 EnnioSM 120SM/2700/19W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2130	19W	113	28°
2B30630 EnnioSM 120SM/3000/19W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2285	19W	121	28°
2B30631 EnnioSM 120SM/4000/19W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2285	19W	121	28°
2B30632 EnnioSM 120SM/2200/19W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1675	19W	89	46°
2B30633 EnnioSM 120SM/2700/19W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2175	19W	115	46°
2B30634 EnnioSM 120SM/3000/19W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2330	19W	123	46°
2B30635 EnnioSM 120SM/4000/19W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2330	19W	123	46°
2B30636 EnnioSM 120SM/2200/19W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1610	19W	85	57°
2B30637 EnnioSM 120SM/2700/19W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2085	19W	110	57°
2B30638 EnnioSM 120SM/3000/19W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2235	19W	118	57°
2B30639 EnnioSM 120SM/4000/19W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2235	19W	118	57°
2B30640 EnnioSM 120SM/2200/22W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1965	22W	90	15°
2B30641 EnnioSM 120SM/2700/22W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2550	22W	116	15°
2B30642 EnnioSM 120SM/3000/22W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2735	22W	125	15°
2B30643 EnnioSM 120SM/4000/22W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2735	22W	125	15°
2B30644 EnnioSM 120SM/2200/22W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1985	22W	91	21°
2B30645 EnnioSM 120SM/2700/22W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2575	22W	118	21°
2B30646 EnnioSM 120SM/3000/22W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2760	22W	126	21°
2B30647 EnnioSM 120SM/4000/22W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2760	22W	126	21°
2B30648 EnnioSM 120SM/2200/22W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1905	22W	87	28°
2B30649 EnnioSM 120SM/2700/22W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2475	22W	113	28°
2B30650 EnnioSM 120SM/3000/22W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2655	22W	121	28°
2B30651 EnnioSM 120SM/4000/22W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2655	22W	121	28°
2B30652 EnnioSM 120SM/2200/22W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1945	22W	89	46°
2B30653 EnnioSM 120SM/2700/22W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2525	22W	115	46°
2B30654 EnnioSM 120SM/3000/22W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2705	22W	123	46°
2B30655 EnnioSM 120SM/4000/22W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2705	22W	123	46°
2B30656 EnnioSM 120SM/2200/22W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2200	1870	22W	85	57°
2B30657 EnnioSM 120SM/2700/22W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2425	22W	111	57°
2B30658 EnnioSM 120SM/3000/22W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2600	22W	119	57°
2B30659 EnnioSM 120SM/4000/22W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2600	22W	119	57°
2B30660 EnnioSM 120SM/2200/26W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2235	26W	86	15°
2B30661 EnnioSM 120SM/2700/26W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2900	26W	112	15°
2B30662 EnnioSM 120SM/3000/26W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3110	26W	120	15°
2B30663 EnnioSM 120SM/4000/26W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3110	26W	120	15°
2B30664 EnnioSM 120SM/2200/26W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2255	26W	87	21°
2B30665 EnnioSM 120SM/2700/26W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2930	26W	113	21°
2B30666 EnnioSM 120SM/3000/26W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3140	26W	121	21°
2B30667 EnnioSM 120SM/4000/26W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3140	26W	121	21°
2B30668 EnnioSM 120SM/2200/26W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2170	26W	84	28°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30669 EnnioSM 120SM/2700/26W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2815	26W	109	28°
2B30670 EnnioSM 120SM/3000/26W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3020	26W	117	28°
2B30671 EnnioSM 120SM/4000/26W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3020	26W	117	28°
2B30672 EnnioSM 120SM/2200/26W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2215	26W	86	46°
2B30673 EnnioSM 120SM/2700/26W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2870	26W	111	46°
2B30674 EnnioSM 120SM/3000/26W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3080	26W	119	46°
2B30675 EnnioSM 120SM/4000/26W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3080	26W	119	46°
2B30676 EnnioSM 120SM/2200/26W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2125	26W	82	57°
2B30677 EnnioSM 120SM/2700/26W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2700	2755	26W	106	57°
2B30678 EnnioSM 120SM/3000/26W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	3000	2955	26W	114	57°
2B30679 EnnioSM 120SM/4000/26W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	4000	2955	26W	114	57°
2B30680 EnnioSM 120SM/2200/30W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2595	30W	90	15°
2B30681 EnnioSM 120SM/2700/30W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	2700	3365	30W	117	15°
2B30682 EnnioSM 120SM/3000/30W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3610	30W	125	15°
2B30683 EnnioSM 120SM/4000/30W/80/A15/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3610	30W	125	15°
2B30684 EnnioSM 120SM/2200/30W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2620	30W	91	21°
2B30685 EnnioSM 120SM/2700/30W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	2700	3400	30W	118	21°
2B30686 EnnioSM 120SM/3000/30W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3645	30W	126	21°
2B30687 EnnioSM 120SM/4000/30W/80/A21/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3645	30W	126	21°
2B30688 EnnioSM 120SM/2200/30W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2515	30W	87	28°
2B30689 EnnioSM 120SM/2700/30W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	2700	3265	30W	113	28°
2B30690 EnnioSM 120SM/3000/30W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3505	30W	121	28°
2B30691 EnnioSM 120SM/4000/30W/80/A28/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3505	30W	121	28°
2B30692 EnnioSM 120SM/2200/30W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2570	30W	89	46°
2B30693 EnnioSM 120SM/2700/30W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	2700	3335	30W	115	46°
2B30694 EnnioSM 120SM/3000/30W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3575	30W	124	46°
2B30695 EnnioSM 120SM/4000/30W/80/A46/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3575	30W	124	46°
2B30696 EnnioSM 120SM/2200/30W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2200	2465	30W	85	57°
2B30697 EnnioSM 120SM/2700/30W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	2700	3200	30W	111	57°
2B30698 EnnioSM 120SM/3000/30W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	3000	3430	30W	119	57°
2B30699 EnnioSM 120SM/4000/30W/80/A57/EM1H/F	1189 x 57 x 81 ± 1mm	4000	3430	30W	119	57°
2B30700 EnnioSM 150SM/2200/23W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2110	23W	92	15°
2B30701 EnnioSM 150SM/2700/23W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2700	2740	23W	120	15°
2B30702 EnnioSM 150SM/3000/23W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	3000	2935	23W	128	15°
2B30703 EnnioSM 150SM/4000/23W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	4000	2935	23W	128	15°
2B30704 EnnioSM 150SM/2200/23W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2130	23W	93	21°
2B30705 EnnioSM 150SM/2700/23W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2700	2765	23W	121	21°
2B30706 EnnioSM 150SM/3000/23W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	3000	2965	23W	129	21°
2B30707 EnnioSM 150SM/4000/23W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	4000	2965	23W	129	21°
2B30708 EnnioSM 150SM/2200/23W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2045	23W	89	28°
2B30709 EnnioSM 150SM/2700/23W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2700	2655	23W	116	28°
2B30710 EnnioSM 150SM/3000/23W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	3000	2850	23W	124	28°
2B30711 EnnioSM 150SM/4000/23W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	4000	2850	23W	124	28°
2B30712 EnnioSM 150SM/2200/23W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2090	23W	91	46°
2B30713 EnnioSM 150SM/2700/23W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2700	2710	23W	118	46°
2B30714 EnnioSM 150SM/3000/23W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	3000	2905	23W	127	46°
2B30715 EnnioSM 150SM/4000/23W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	4000	2905	23W	127	46°
2B30716 EnnioSM 150SM/2200/23W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2005	23W	88	57°
2B30717 EnnioSM 150SM/2700/23W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2700	2605	23W	114	57°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30718 EnnioSM 150SM/3000/23W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	3000	2790	23W	122	57°
2B30719 EnnioSM 150SM/4000/23W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	4000	2790	23W	122	57°
2B30720 EnnioSM 150SM/2200/28W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2450	28W	88	15°
2B30721 EnnioSM 150SM/2700/28W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3180	28W	114	15°
2B30722 EnnioSM 150SM/3000/28W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3410	28W	122	15°
2B30723 EnnioSM 150SM/4000/28W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3410	28W	122	15°
2B30724 EnnioSM 150SM/2200/28W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2475	28W	89	21°
2B30725 EnnioSM 150SM/2700/28W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3215	28W	115	21°
2B30726 EnnioSM 150SM/3000/28W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3445	28W	124	21°
2B30727 EnnioSM 150SM/4000/28W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3445	28W	124	21°
2B30728 EnnioSM 150SM/2200/28W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2380	28W	85	28°
2B30729 EnnioSM 150SM/2700/28W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3090	28W	111	28°
2B30730 EnnioSM 150SM/3000/28W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3310	28W	119	28°
2B30731 EnnioSM 150SM/4000/28W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3310	28W	119	28°
2B30732 EnnioSM 150SM/2200/28W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2425	28W	87	46°
2B30733 EnnioSM 150SM/2700/28W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3150	28W	113	46°
2B30734 EnnioSM 150SM/3000/28W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3380	28W	121	46°
2B30735 EnnioSM 150SM/4000/28W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3380	28W	121	46°
2B30736 EnnioSM 150SM/2200/28W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2330	28W	84	57°
2B30737 EnnioSM 150SM/2700/28W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3025	28W	109	57°
2B30738 EnnioSM 150SM/3000/28W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3245	28W	116	57°
2B30739 EnnioSM 150SM/4000/28W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3245	28W	116	57°
2B30740 EnnioSM 150SM/2200/32W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2795	32W	88	15°
2B30741 EnnioSM 150SM/2700/32W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3625	32W	114	15°
2B30742 EnnioSM 150SM/3000/32W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3885	32W	122	15°
2B30743 EnnioSM 150SM/4000/32W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3885	32W	122	15°
2B30744 EnnioSM 150SM/2200/32W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2820	32W	89	21°
2B30745 EnnioSM 150SM/2700/32W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3660	32W	115	21°
2B30746 EnnioSM 150SM/3000/32W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3925	32W	123	21°
2B30747 EnnioSM 150SM/4000/32W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3925	32W	123	21°
2B30748 EnnioSM 150SM/2200/32W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2710	32W	85	28°
2B30749 EnnioSM 150SM/2700/32W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3515	32W	110	28°
2B30750 EnnioSM 150SM/3000/32W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3770	32W	118	28°
2B30751 EnnioSM 150SM/4000/32W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3770	32W	118	28°
2B30752 EnnioSM 150SM/2200/32W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2765	32W	87	46°
2B30753 EnnioSM 150SM/2700/32W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3590	32W	113	46°
2B30754 EnnioSM 150SM/3000/32W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3850	32W	121	46°
2B30755 EnnioSM 150SM/4000/32W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3850	32W	121	46°
2B30756 EnnioSM 150SM/2200/32W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2200	2655	32W	83	57°
2B30757 EnnioSM 150SM/2700/32W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3445	32W	108	57°
2B30758 EnnioSM 150SM/3000/32W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	3000	3695	32W	116	57°
2B30759 EnnioSM 150SM/4000/32W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	4000	3695	32W	116	57°
2B30760 EnnioSM 150SM/2200/36W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2200	3220	36W	90	15°
2B30761 EnnioSM 150SM/2700/36W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	2700	4180	36W	117	15°
2B30762 EnnioSM 150SM/3000/36W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	3000	4480	36W	125	15°
2B30763 EnnioSM 150SM/4000/36W/80/A15/EM1H/F	1476 x 57 x 81 ± 1mm	4000	4480	36W	125	15°
2B30764 EnnioSM 150SM/2200/36W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2200	3250	36W	91	21°
2B30765 EnnioSM 150SM/2700/36W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	2700	4220	36W	118	21°
2B30766 EnnioSM 150SM/3000/36W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	3000	4525	36W	126	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30767 EnnioSM 150SM/4000/36W/80/A21/EM1H/F	1476 x 57 x 81 ± 1mm	4000	4525	36W	126	21°
2B30768 EnnioSM 150SM/2200/36W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2200	3125	36W	87	28°
2B30769 EnnioSM 150SM/2700/36W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	2700	4055	36W	113	28°
2B30770 EnnioSM 150SM/3000/36W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	3000	4350	36W	121	28°
2B30771 EnnioSM 150SM/4000/36W/80/A28/EM1H/F	1476 x 57 x 81 ± 1mm	4000	4350	36W	121	28°
2B30772 EnnioSM 150SM/2200/36W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2200	3185	36W	89	46°
2B30773 EnnioSM 150SM/2700/36W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	2700	4135	36W	115	46°
2B30774 EnnioSM 150SM/3000/36W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	3000	4435	36W	124	46°
2B30775 EnnioSM 150SM/4000/36W/80/A46/EM1H/F	1476 x 57 x 81 ± 1mm	4000	4435	36W	124	46°
2B30776 EnnioSM 150SM/2200/36W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2200	3060	36W	85	57°
2B30777 EnnioSM 150SM/2700/36W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	2700	3970	36W	111	57°
2B30778 EnnioSM 150SM/3000/36W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	3000	4260	36W	119	57°
2B30779 EnnioSM 150SM/4000/36W/80/A57/EM1H/F	1476 x 57 x 81 ± 1mm	4000	4260	36W	119	57°
2B30940 EnnioSM 120SM/2200/19W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1690	19W	89	15°
2B30941 EnnioSM 120SM/2700/19W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2195	19W	116	15°
2B30942 EnnioSM 120SM/3000/19W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2355	19W	124	15°
2B30943 EnnioSM 120SM/4000/19W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2355	19W	124	15°
2B30944 EnnioSM 120SM/2200/19W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1710	19W	90	21°
2B30945 EnnioSM 120SM/2700/19W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2215	19W	117	21°
2B30946 EnnioSM 120SM/3000/19W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2375	19W	125	21°
2B30947 EnnioSM 120SM/4000/19W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2375	19W	125	21°
2B30948 EnnioSM 120SM/2200/19W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1640	19W	87	28°
2B30949 EnnioSM 120SM/2700/19W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2130	19W	113	28°
2B30950 EnnioSM 120SM/3000/19W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2285	19W	121	28°
2B30951 EnnioSM 120SM/4000/19W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2285	19W	121	28°
2B30952 EnnioSM 120SM/2200/19W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1675	19W	89	46°
2B30953 EnnioSM 120SM/2700/19W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2175	19W	115	46°
2B30954 EnnioSM 120SM/3000/19W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2330	19W	123	46°
2B30955 EnnioSM 120SM/4000/19W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2330	19W	123	46°
2B30956 EnnioSM 120SM/2200/19W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1610	19W	85	57°
2B30957 EnnioSM 120SM/2700/19W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2085	19W	110	57°
2B30958 EnnioSM 120SM/3000/19W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2235	19W	118	57°
2B30959 EnnioSM 120SM/4000/19W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2235	19W	118	57°
2B30960 EnnioSM 120SM/2200/22W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1965	22W	90	15°
2B30961 EnnioSM 120SM/2700/22W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2550	22W	116	15°
2B30962 EnnioSM 120SM/3000/22W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2735	22W	125	15°
2B30963 EnnioSM 120SM/4000/22W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2735	22W	125	15°
2B30964 EnnioSM 120SM/2200/22W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1985	22W	91	21°
2B30965 EnnioSM 120SM/2700/22W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2575	22W	118	21°
2B30966 EnnioSM 120SM/3000/22W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2760	22W	126	21°
2B30967 EnnioSM 120SM/4000/22W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2760	22W	126	21°
2B30968 EnnioSM 120SM/2200/22W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1905	22W	87	28°
2B30969 EnnioSM 120SM/2700/22W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2475	22W	113	28°
2B30970 EnnioSM 120SM/3000/22W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2655	22W	121	28°
2B30971 EnnioSM 120SM/4000/22W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2655	22W	121	28°
2B30972 EnnioSM 120SM/2200/22W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1945	22W	89	46°
2B30973 EnnioSM 120SM/2700/22W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2525	22W	115	46°
2B30974 EnnioSM 120SM/3000/22W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2705	22W	123	46°
2B30975 EnnioSM 120SM/4000/22W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2705	22W	123	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B30976 EnnioSM 120SM/2200/22W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2200	1870	22W	85	57°
2B30977 EnnioSM 120SM/2700/22W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2425	22W	111	57°
2B30978 EnnioSM 120SM/3000/22W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2600	22W	119	57°
2B30979 EnnioSM 120SM/4000/22W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2600	22W	119	57°
2B30980 EnnioSM 120SM/2200/26W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2235	26W	86	15°
2B30981 EnnioSM 120SM/2700/26W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2900	26W	112	15°
2B30982 EnnioSM 120SM/3000/26W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3110	26W	120	15°
2B30983 EnnioSM 120SM/4000/26W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3110	26W	120	15°
2B30984 EnnioSM 120SM/2200/26W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2255	26W	87	21°
2B30985 EnnioSM 120SM/2700/26W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2930	26W	113	21°
2B30986 EnnioSM 120SM/3000/26W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3140	26W	121	21°
2B30987 EnnioSM 120SM/4000/26W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3140	26W	121	21°
2B30988 EnnioSM 120SM/2200/26W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2170	26W	84	28°
2B30989 EnnioSM 120SM/2700/26W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2815	26W	109	28°
2B30990 EnnioSM 120SM/3000/26W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3020	26W	117	28°
2B30991 EnnioSM 120SM/4000/26W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3020	26W	117	28°
2B30992 EnnioSM 120SM/2200/26W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2215	26W	86	46°
2B30993 EnnioSM 120SM/2700/26W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2870	26W	111	46°
2B30994 EnnioSM 120SM/3000/26W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3080	26W	119	46°
2B30995 EnnioSM 120SM/4000/26W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3080	26W	119	46°
2B30996 EnnioSM 120SM/2200/26W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2125	26W	82	57°
2B30997 EnnioSM 120SM/2700/26W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2700	2755	26W	106	57°
2B30998 EnnioSM 120SM/3000/26W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	3000	2955	26W	114	57°
2B30999 EnnioSM 120SM/4000/26W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	4000	2955	26W	114	57°
2B31000 EnnioSM 120SM/2200/30W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2595	30W	90	15°
2B31001 EnnioSM 120SM/2700/30W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	2700	3365	30W	117	15°
2B31002 EnnioSM 120SM/3000/30W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3610	30W	125	15°
2B31003 EnnioSM 120SM/4000/30W/80/A15/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3610	30W	125	15°
2B31004 EnnioSM 120SM/2200/30W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2620	30W	91	21°
2B31005 EnnioSM 120SM/2700/30W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	2700	3400	30W	118	21°
2B31006 EnnioSM 120SM/3000/30W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3645	30W	126	21°
2B31007 EnnioSM 120SM/4000/30W/80/A21/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3645	30W	126	21°
2B31008 EnnioSM 120SM/2200/30W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2515	30W	87	28°
2B31009 EnnioSM 120SM/2700/30W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	2700	3265	30W	113	28°
2B31010 EnnioSM 120SM/3000/30W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3505	30W	121	28°
2B31011 EnnioSM 120SM/4000/30W/80/A28/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3505	30W	121	28°
2B31012 EnnioSM 120SM/2200/30W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2570	30W	89	46°
2B31013 EnnioSM 120SM/2700/30W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	2700	3335	30W	115	46°
2B31014 EnnioSM 120SM/3000/30W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3575	30W	124	46°
2B31015 EnnioSM 120SM/4000/30W/80/A46/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3575	30W	124	46°
2B31016 EnnioSM 120SM/2200/30W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2200	2465	30W	85	57°
2B31017 EnnioSM 120SM/2700/30W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	2700	3200	30W	111	57°
2B31018 EnnioSM 120SM/3000/30W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	3000	3430	30W	119	57°
2B31019 EnnioSM 120SM/4000/30W/80/A57/EM3H/F	1189 x 57 x 81 ± 1mm	4000	3430	30W	119	57°
2B31020 EnnioSM 150SM/2200/23W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2110	23W	92	15°
2B31021 EnnioSM 150SM/2700/23W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2700	2740	23W	120	15°
2B31022 EnnioSM 150SM/3000/23W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	3000	2935	23W	128	15°
2B31023 EnnioSM 150SM/4000/23W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	4000	2935	23W	128	15°
2B31024 EnnioSM 150SM/2200/23W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2130	23W	93	21°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B31025 EnnioSM 150SM/2700/23W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2700	2765	23W	121	21°
2B31026 EnnioSM 150SM/3000/23W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	3000	2965	23W	129	21°
2B31027 EnnioSM 150SM/4000/23W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	4000	2965	23W	129	21°
2B31028 EnnioSM 150SM/2200/23W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2045	23W	89	28°
2B31029 EnnioSM 150SM/2700/23W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2700	2655	23W	116	28°
2B31030 EnnioSM 150SM/3000/23W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	3000	2850	23W	124	28°
2B31031 EnnioSM 150SM/4000/23W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	4000	2850	23W	124	28°
2B31032 EnnioSM 150SM/2200/23W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2090	23W	91	46°
2B31033 EnnioSM 150SM/2700/23W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2700	2710	23W	118	46°
2B31034 EnnioSM 150SM/3000/23W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	3000	2905	23W	127	46°
2B31035 EnnioSM 150SM/4000/23W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	4000	2905	23W	127	46°
2B31036 EnnioSM 150SM/2200/23W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2005	23W	88	57°
2B31037 EnnioSM 150SM/2700/23W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2700	2605	23W	114	57°
2B31038 EnnioSM 150SM/3000/23W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	3000	2790	23W	122	57°
2B31039 EnnioSM 150SM/4000/23W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	4000	2790	23W	122	57°
2B31040 EnnioSM 150SM/2200/28W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2450	28W	88	15°
2B31041 EnnioSM 150SM/2700/28W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3180	28W	114	15°
2B31042 EnnioSM 150SM/3000/28W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3410	28W	122	15°
2B31043 EnnioSM 150SM/4000/28W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3410	28W	122	15°
2B31044 EnnioSM 150SM/2200/28W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2475	28W	89	21°
2B31045 EnnioSM 150SM/2700/28W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3215	28W	115	21°
2B31046 EnnioSM 150SM/3000/28W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3445	28W	124	21°
2B31047 EnnioSM 150SM/4000/28W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3445	28W	124	21°
2B31048 EnnioSM 150SM/2200/28W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2380	28W	85	28°
2B31049 EnnioSM 150SM/2700/28W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3090	28W	111	28°
2B31050 EnnioSM 150SM/3000/28W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3310	28W	119	28°
2B31051 EnnioSM 150SM/4000/28W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3310	28W	119	28°
2B31052 EnnioSM 150SM/2200/28W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2425	28W	87	46°
2B31053 EnnioSM 150SM/2700/28W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3150	28W	113	46°
2B31054 EnnioSM 150SM/3000/28W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3380	28W	121	46°
2B31055 EnnioSM 150SM/4000/28W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3380	28W	121	46°
2B31056 EnnioSM 150SM/2200/28W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2330	28W	84	57°
2B31057 EnnioSM 150SM/2700/28W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3025	28W	109	57°
2B31058 EnnioSM 150SM/3000/28W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3245	28W	116	57°
2B31059 EnnioSM 150SM/4000/28W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3245	28W	116	57°
2B31060 EnnioSM 150SM/2200/32W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2795	32W	88	15°
2B31061 EnnioSM 150SM/2700/32W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3625	32W	114	15°
2B31062 EnnioSM 150SM/3000/32W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3885	32W	122	15°
2B31063 EnnioSM 150SM/4000/32W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3885	32W	122	15°
2B31064 EnnioSM 150SM/2200/32W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2820	32W	89	21°
2B31065 EnnioSM 150SM/2700/32W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3660	32W	115	21°
2B31066 EnnioSM 150SM/3000/32W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3925	32W	123	21°
2B31067 EnnioSM 150SM/4000/32W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3925	32W	123	21°
2B31068 EnnioSM 150SM/2200/32W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2710	32W	85	28°
2B31069 EnnioSM 150SM/2700/32W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3515	32W	110	28°
2B31070 EnnioSM 150SM/3000/32W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3770	32W	118	28°
2B31071 EnnioSM 150SM/4000/32W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3770	32W	118	28°
2B31072 EnnioSM 150SM/2200/32W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2765	32W	87	46°
2B31073 EnnioSM 150SM/2700/32W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3590	32W	113	46°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
2B31074 EnnioSM 150SM/3000/32W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3850	32W	121	46°
2B31075 EnnioSM 150SM/4000/32W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3850	32W	121	46°
2B31076 EnnioSM 150SM/2200/32W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2200	2655	32W	83	57°
2B31077 EnnioSM 150SM/2700/32W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3445	32W	108	57°
2B31078 EnnioSM 150SM/3000/32W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	3000	3695	32W	116	57°
2B31079 EnnioSM 150SM/4000/32W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	4000	3695	32W	116	57°
2B31080 EnnioSM 150SM/2200/36W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2200	3220	36W	90	15°
2B31081 EnnioSM 150SM/2700/36W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	2700	4180	36W	117	15°
2B31082 EnnioSM 150SM/3000/36W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	3000	4480	36W	125	15°
2B31083 EnnioSM 150SM/4000/36W/80/A15/EM3H/F	1476 x 57 x 81 ± 1mm	4000	4480	36W	125	15°
2B31084 EnnioSM 150SM/2200/36W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2200	3250	36W	91	21°
2B31085 EnnioSM 150SM/2700/36W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	2700	4220	36W	118	21°
2B31086 EnnioSM 150SM/3000/36W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	3000	4525	36W	126	21°
2B31087 EnnioSM 150SM/4000/36W/80/A21/EM3H/F	1476 x 57 x 81 ± 1mm	4000	4525	36W	126	21°
2B31088 EnnioSM 150SM/2200/36W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2200	3125	36W	87	28°
2B31089 EnnioSM 150SM/2700/36W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	2700	4055	36W	113	28°
2B31090 EnnioSM 150SM/3000/36W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	3000	4350	36W	121	28°
2B31091 EnnioSM 150SM/4000/36W/80/A28/EM3H/F	1476 x 57 x 81 ± 1mm	4000	4350	36W	121	28°
2B31092 EnnioSM 150SM/2200/36W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2200	3185	36W	89	46°
2B31093 EnnioSM 150SM/2700/36W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	2700	4135	36W	115	46°
2B31094 EnnioSM 150SM/3000/36W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	3000	4435	36W	124	46°
2B31095 EnnioSM 150SM/4000/36W/80/A46/EM3H/F	1476 x 57 x 81 ± 1mm	4000	4435	36W	124	46°
2B31096 EnnioSM 150SM/2200/36W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2200	3060	36W	85	57°
2B31097 EnnioSM 150SM/2700/36W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	2700	3970	36W	111	57°
2B31098 EnnioSM 150SM/3000/36W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	3000	4260	36W	119	57°
2B31099 EnnioSM 150SM/4000/36W/80/A57/EM3H/F	1476 x 57 x 81 ± 1mm	4000	4260	36W	119	57°