



## Lenyk Slim TRK

### TRACK LINEARS | NON-DALI SERIES

Lenyk Slim - as the name reveals, has a slimmer, more streamlined housing than Lenyk N. It boasts the same simple and double asymmetric lenses and high efficiency of the Lenyk family but, in addition, it also has a 30-cm version suitable for small enclosures which demand high illuminance.

Lenyk Slim TRK has several series, determined by various add-on and controls:




- Lenyk Slim TRK Non-DALI: the standard for industrial, DIY and retail spaces
- Lenyk Slim TRK DALI: with DALI dimming

### APPLICATION

Grocery & Supermarkets | Retail | Industrial & Logistics | DIY

### FEATURES & BENEFITS

- CRI  $\geq 80$  as standard
- 4 color temperatures: 3000K, 4000K, 5000K and 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: TB (30°), NB (60°), WB (90°), DA (Double Asymmetric), SA (Simple Asymmetric)




SPECIFICATIONS

Power consumption	12W, 16W	15W, 26W, 30W	21W, 37W, 44W, 50W	26W, 35W, 45W, 53W, 62W
Dimensions	301x71x68mm±1mm	593x71x69mm±1mm	1177x71x108mm±1mm	1469x71x108mm±1mm
Weight	0.8 Kg	1.1 Kg	2.1 Kg	2.5 Kg
Housing materials	Aluminum & Polycarbonate			
IK code	IK04			
THD (at 230V, 50Hz, Full load)	<8%			
Protection class	Safety class 1			
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F			
Operating humidity [%]	10 ÷ 85			
Power factor	≥0.95			
AC Input [Vac]	220 - 240 VAC			
Lens angle [°]	30°, 60°, 90°, DA, SA			
Lifespan [h]	50,000			
Housing color	● Anodised Black, ● Anodised Grey			
Lumen maintenance	L90/B10@50,000h at 25°C			
IP factor	IP20			
Control optional	-			
Warranty [years]	5			
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F			
Emergency option	-			

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

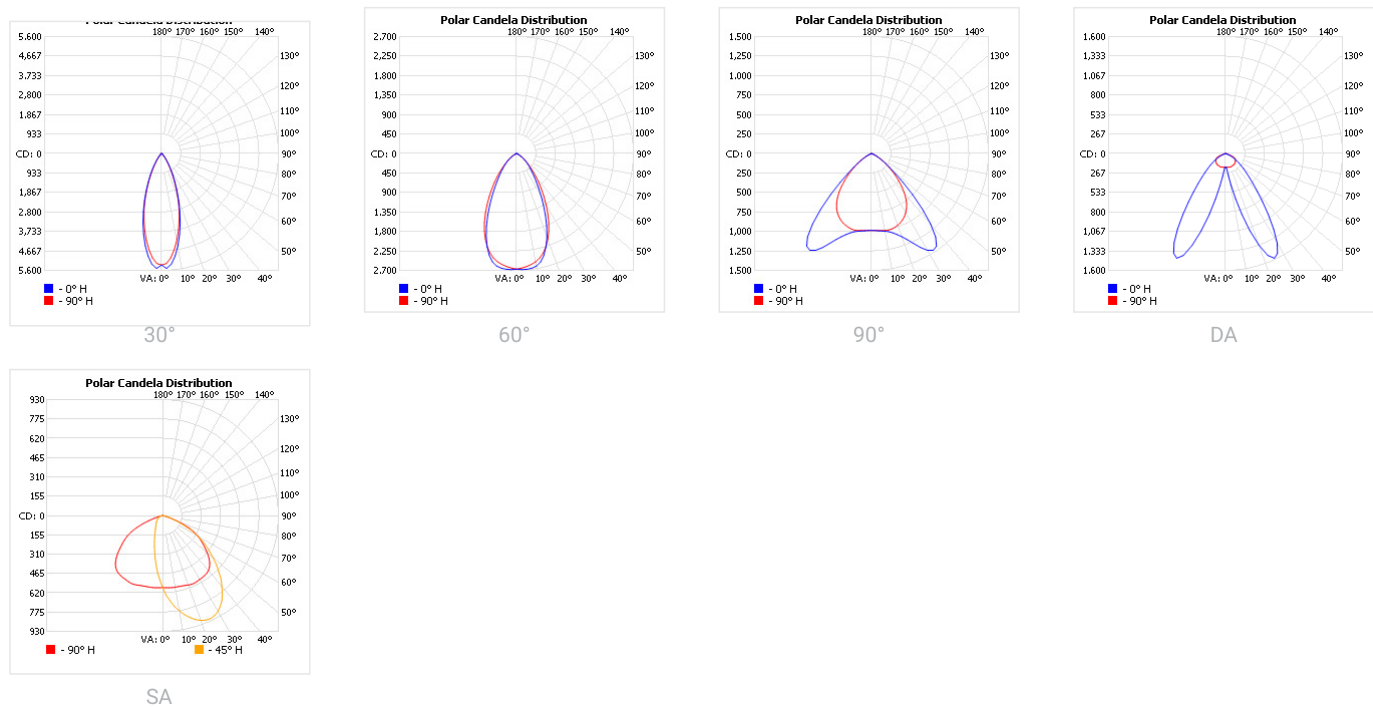

**TOLERANCES****Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power [W]	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
<50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
<80W	DALI	27	21	13	45	35	21

**RISK GROUP****Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**RG2**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
191000 Lenyk Slim TRK30/3000/12W/80/TB	301x71x68mm±1mm	3000	1595	12W	133	30°
191001 Lenyk Slim TRK30/4000/12W/80/TB	301x71x68mm±1mm	4000	1660	12W	139	30°
191002 Lenyk Slim TRK30/5000/12W/80/TB	301x71x68mm±1mm	5000	1705	12W	143	30°
191003 Lenyk Slim TRK30/6500/12W/80/TB	301x71x68mm±1mm	6500	1660	12W	139	30°
191004 Lenyk Slim TRK30/3000/12W/80/NB	301x71x68mm±1mm	3000	1585	12W	132	60°
191005 Lenyk Slim TRK30/4000/12W/80/NB	301x71x68mm±1mm	4000	1650	12W	138	60°
191006 Lenyk Slim TRK30/5000/12W/80/NB	301x71x68mm±1mm	5000	1695	12W	141	60°
191007 Lenyk Slim TRK30/6500/12W/80/NB	301x71x68mm±1mm	6500	1650	12W	138	60°
191008 Lenyk Slim TRK30/3000/12W/80/WB	301x71x68mm±1mm	3000	1590	12W	133	90°
191009 Lenyk Slim TRK30/4000/12W/80/WB	301x71x68mm±1mm	4000	1655	12W	138	90°
191010 Lenyk Slim TRK30/5000/12W/80/WB	301x71x68mm±1mm	5000	1700	12W	142	90°
191011 Lenyk Slim TRK30/6500/12W/80/WB	301x71x68mm±1mm	6500	1655	12W	138	90°
191012 Lenyk Slim TRK30/3000/12W/80/DA	301x71x68mm±1mm	3000	1585	12W	132	DA
191013 Lenyk Slim TRK30/4000/12W/80/DA	301x71x68mm±1mm	4000	1650	12W	138	DA
191014 Lenyk Slim TRK30/5000/12W/80/DA	301x71x68mm±1mm	5000	1695	12W	141	DA
191015 Lenyk Slim TRK30/6500/12W/80/DA	301x71x68mm±1mm	6500	1650	12W	138	DA
191016 Lenyk Slim TRK30/3000/12W/80/SA	301x71x68mm±1mm	3000	1510	12W	126	SA
191017 Lenyk Slim TRK30/4000/12W/80/SA	301x71x68mm±1mm	4000	1575	12W	132	SA
191018 Lenyk Slim TRK30/5000/12W/80/SA	301x71x68mm±1mm	5000	1620	12W	135	SA
191019 Lenyk Slim TRK30/6500/12W/80/SA	301x71x68mm±1mm	6500	1575	12W	132	SA
191020 Lenyk Slim TRK30/3000/16W/80/TB	301x71x68mm±1mm	3000	2010	16W	126	30°
191021 Lenyk Slim TRK30/4000/16W/80/TB	301x71x68mm±1mm	4000	2095	16W	131	30°
191022 Lenyk Slim TRK30/5000/16W/80/TB	301x71x68mm±1mm	5000	2150	16W	135	30°
191023 Lenyk Slim TRK30/6500/16W/80/TB	301x71x68mm±1mm	6500	2095	16W	131	30°
191024 Lenyk Slim TRK30/3000/16W/80/NB	301x71x68mm±1mm	3000	1995	16W	125	60°
191025 Lenyk Slim TRK30/4000/16W/80/NB	301x71x68mm±1mm	4000	2080	16W	130	60°
191026 Lenyk Slim TRK30/5000/16W/80/NB	301x71x68mm±1mm	5000	2135	16W	134	60°
191027 Lenyk Slim TRK30/6500/16W/80/NB	301x71x68mm±1mm	6500	2080	16W	130	60°
191028 Lenyk Slim TRK30/3000/16W/80/WB	301x71x68mm±1mm	3000	2005	16W	126	90°
191029 Lenyk Slim TRK30/4000/16W/80/WB	301x71x68mm±1mm	4000	2090	16W	131	90°
191030 Lenyk Slim TRK30/5000/16W/80/WB	301x71x68mm±1mm	5000	2145	16W	134	90°
191031 Lenyk Slim TRK30/6500/16W/80/WB	301x71x68mm±1mm	6500	2090	16W	131	90°
191032 Lenyk Slim TRK30/3000/16W/80/DA	301x71x68mm±1mm	3000	1995	16W	125	DA
191033 Lenyk Slim TRK30/4000/16W/80/DA	301x71x68mm±1mm	4000	2080	16W	130	DA
191034 Lenyk Slim TRK30/5000/16W/80/DA	301x71x68mm±1mm	5000	2135	16W	134	DA
191035 Lenyk Slim TRK30/6500/16W/80/DA	301x71x68mm±1mm	6500	2080	16W	130	DA
191036 Lenyk Slim TRK30/3000/16W/80/SA	301x71x68mm±1mm	3000	1905	16W	119	SA
191037 Lenyk Slim TRK30/4000/16W/80/SA	301x71x68mm±1mm	4000	1985	16W	124	SA
191038 Lenyk Slim TRK30/5000/16W/80/SA	301x71x68mm±1mm	5000	2040	16W	128	SA
191039 Lenyk Slim TRK30/6500/16W/80/SA	301x71x68mm±1mm	6500	1985	16W	124	SA
191040 Lenyk Slim TRK60/3000/15W/80/TB	593x71x69mm±1mm	3000	2135	15W	143	30°
191041 Lenyk Slim TRK60/4000/15W/80/TB	593x71x69mm±1mm	4000	2225	15W	149	30°
191042 Lenyk Slim TRK60/5000/15W/80/TB	593x71x69mm±1mm	5000	2285	15W	153	30°
191043 Lenyk Slim TRK60/6500/15W/80/TB	593x71x69mm±1mm	6500	2225	15W	149	30°
191044 Lenyk Slim TRK60/3000/15W/80/NB	593x71x69mm±1mm	3000	2120	15W	142	60°
191045 Lenyk Slim TRK60/4000/15W/80/NB	593x71x69mm±1mm	4000	2205	15W	147	60°
191046 Lenyk Slim TRK60/5000/15W/80/NB	593x71x69mm±1mm	5000	2265	15W	151	60°
191047 Lenyk Slim TRK60/6500/15W/80/NB	593x71x69mm±1mm	6500	2205	15W	147	60°
191048 Lenyk Slim TRK60/3000/15W/80/WB	593x71x69mm±1mm	3000	2125	15W	142	90°
191049 Lenyk Slim TRK60/4000/15W/80/WB	593x71x69mm±1mm	4000	2215	15W	148	90°
191050 Lenyk Slim TRK60/5000/15W/80/WB	593x71x69mm±1mm	5000	2275	15W	152	90°
191051 Lenyk Slim TRK60/6500/15W/80/WB	593x71x69mm±1mm	6500	2215	15W	148	90°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
191052 Lenyk Slim TRK60/3000/15W/80/DA	593x71x69mm±1mm	3000	2120	15W	142	DA
191053 Lenyk Slim TRK60/4000/15W/80/DA	593x71x69mm±1mm	4000	2205	15W	147	DA
191054 Lenyk Slim TRK60/5000/15W/80/DA	593x71x69mm±1mm	5000	2265	15W	151	DA
191055 Lenyk Slim TRK60/6500/15W/80/DA	593x71x69mm±1mm	6500	2205	15W	147	DA
191056 Lenyk Slim TRK60/3000/15W/80/SA	593x71x69mm±1mm	3000	2020	15W	135	SA
191057 Lenyk Slim TRK60/4000/15W/80/SA	593x71x69mm±1mm	4000	2110	15W	141	SA
191058 Lenyk Slim TRK60/5000/15W/80/SA	593x71x69mm±1mm	5000	2165	15W	145	SA
191059 Lenyk Slim TRK60/6500/15W/80/SA	593x71x69mm±1mm	6500	2110	15W	141	SA
191060 Lenyk Slim TRK60/3000/26W/80/TB	593x71x69mm±1mm	3000	3480	26W	134	30°
191061 Lenyk Slim TRK60/4000/26W/80/TB	593x71x69mm±1mm	4000	3630	26W	140	30°
191062 Lenyk Slim TRK60/5000/26W/80/TB	593x71x69mm±1mm	5000	3725	26W	144	30°
191063 Lenyk Slim TRK60/6500/26W/80/TB	593x71x69mm±1mm	6500	3630	26W	140	30°
191064 Lenyk Slim TRK60/3000/26W/80/NB	593x71x69mm±1mm	3000	3455	26W	133	60°
191065 Lenyk Slim TRK60/4000/26W/80/NB	593x71x69mm±1mm	4000	3600	26W	139	60°
191066 Lenyk Slim TRK60/5000/26W/80/NB	593x71x69mm±1mm	5000	3700	26W	143	60°
191067 Lenyk Slim TRK60/6500/26W/80/NB	593x71x69mm±1mm	6500	3600	26W	139	60°
191068 Lenyk Slim TRK60/3000/26W/80/WB	593x71x69mm±1mm	3000	3470	26W	134	90°
191069 Lenyk Slim TRK60/4000/26W/80/WB	593x71x69mm±1mm	4000	3620	26W	140	90°
191070 Lenyk Slim TRK60/5000/26W/80/WB	593x71x69mm±1mm	5000	3715	26W	143	90°
191071 Lenyk Slim TRK60/6500/26W/80/WB	593x71x69mm±1mm	6500	3620	26W	140	90°
191072 Lenyk Slim TRK60/3000/26W/80/DA	593x71x69mm±1mm	3000	3455	26W	133	DA
191073 Lenyk Slim TRK60/4000/26W/80/DA	593x71x69mm±1mm	4000	3600	26W	139	DA
191074 Lenyk Slim TRK60/5000/26W/80/DA	593x71x69mm±1mm	5000	3700	26W	143	DA
191075 Lenyk Slim TRK60/6500/26W/80/DA	593x71x69mm±1mm	6500	3600	26W	139	DA
191076 Lenyk Slim TRK60/3000/26W/80/SA	593x71x69mm±1mm	3000	3300	26W	127	SA
191077 Lenyk Slim TRK60/4000/26W/80/SA	593x71x69mm±1mm	4000	3440	26W	133	SA
191078 Lenyk Slim TRK60/5000/26W/80/SA	593x71x69mm±1mm	5000	3530	26W	136	SA
191079 Lenyk Slim TRK60/6500/26W/80/SA	593x71x69mm±1mm	6500	3440	26W	133	SA
191080 Lenyk Slim TRK60/3000/30W/80/TB	593x71x69mm±1mm	3000	3945	30W	132	30°
191081 Lenyk Slim TRK60/4000/30W/80/TB	593x71x69mm±1mm	4000	4115	30W	138	30°
191082 Lenyk Slim TRK60/5000/30W/80/TB	593x71x69mm±1mm	5000	4225	30W	141	30°
191083 Lenyk Slim TRK60/6500/30W/80/TB	593x71x69mm±1mm	6500	4115	30W	138	30°
191084 Lenyk Slim TRK60/3000/30W/80/NB	593x71x69mm±1mm	3000	3920	30W	131	60°
191085 Lenyk Slim TRK60/4000/30W/80/NB	593x71x69mm±1mm	4000	4085	30W	137	60°
191086 Lenyk Slim TRK60/5000/30W/80/NB	593x71x69mm±1mm	5000	4195	30W	140	60°
191087 Lenyk Slim TRK60/6500/30W/80/NB	593x71x69mm±1mm	6500	4085	30W	137	60°
191088 Lenyk Slim TRK60/3000/30W/80/WB	593x71x69mm±1mm	3000	3935	30W	132	90°
191089 Lenyk Slim TRK60/4000/30W/80/WB	593x71x69mm±1mm	4000	4105	30W	137	90°
191090 Lenyk Slim TRK60/5000/30W/80/WB	593x71x69mm±1mm	5000	4215	30W	141	90°
191091 Lenyk Slim TRK60/6500/30W/80/WB	593x71x69mm±1mm	6500	4105	30W	137	90°
191092 Lenyk Slim TRK60/3000/30W/80/DA	593x71x69mm±1mm	3000	3920	30W	131	DA
191093 Lenyk Slim TRK60/4000/30W/80/DA	593x71x69mm±1mm	4000	4085	30W	137	DA
191094 Lenyk Slim TRK60/5000/30W/80/DA	593x71x69mm±1mm	5000	4195	30W	140	DA
191095 Lenyk Slim TRK60/6500/30W/80/DA	593x71x69mm±1mm	6500	4085	30W	137	DA
191096 Lenyk Slim TRK60/3000/30W/80/SA	593x71x69mm±1mm	3000	3740	30W	125	SA
191097 Lenyk Slim TRK60/4000/30W/80/SA	593x71x69mm±1mm	4000	3900	30W	130	SA
191098 Lenyk Slim TRK60/5000/30W/80/SA	593x71x69mm±1mm	5000	4005	30W	134	SA
191099 Lenyk Slim TRK60/6500/30W/80/SA	593x71x69mm±1mm	6500	3900	30W	130	SA
191100 Lenyk Slim TRK120/3000/21W/80/TB	1177x71x108mm±1mm	3000	3445	21W	165	30°
191101 Lenyk Slim TRK120/4000/21W/80/TB	1177x71x108mm±1mm	4000	3590	21W	171	30°
191102 Lenyk Slim TRK120/5000/21W/80/TB	1177x71x108mm±1mm	5000	3685	21W	176	30°
191103 Lenyk Slim TRK120/6500/21W/80/TB	1177x71x108mm±1mm	6500	3590	21W	171	30°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)	
<b>CRI 80</b>							
191104	Lenyk Slim TRK120/3000/21W/80/NB	1177x71x108mm±1mm	3000	3420	21W	163	60°
191105	Lenyk Slim TRK120/4000/21W/80/NB	1177x71x108mm±1mm	4000	3565	21W	170	60°
191106	Lenyk Slim TRK120/5000/21W/80/NB	1177x71x108mm±1mm	5000	3660	21W	175	60°
191107	Lenyk Slim TRK120/6500/21W/80/NB	1177x71x108mm±1mm	6500	3565	21W	170	60°
191108	Lenyk Slim TRK120/3000/21W/80/WB	1177x71x108mm±1mm	3000	3435	21W	164	90°
191109	Lenyk Slim TRK120/4000/21W/80/WB	1177x71x108mm±1mm	4000	3580	21W	171	90°
191110	Lenyk Slim TRK120/5000/21W/80/WB	1177x71x108mm±1mm	5000	3675	21W	175	90°
191111	Lenyk Slim TRK120/6500/21W/80/WB	1177x71x108mm±1mm	6500	3580	21W	171	90°
191112	Lenyk Slim TRK120/3000/21W/80/DA	1177x71x108mm±1mm	3000	3420	21W	163	DA
191113	Lenyk Slim TRK120/4000/21W/80/DA	1177x71x108mm±1mm	4000	3565	21W	170	DA
191114	Lenyk Slim TRK120/5000/21W/80/DA	1177x71x108mm±1mm	5000	3660	21W	175	DA
191115	Lenyk Slim TRK120/6500/21W/80/DA	1177x71x108mm±1mm	6500	3565	21W	170	DA
191116	Lenyk Slim TRK120/3000/21W/80/SA	1177x71x108mm±1mm	3000	3280	21W	157	SA
191117	Lenyk Slim TRK120/4000/21W/80/SA	1177x71x108mm±1mm	4000	3415	21W	163	SA
191118	Lenyk Slim TRK120/5000/21W/80/SA	1177x71x108mm±1mm	5000	3510	21W	168	SA
191119	Lenyk Slim TRK120/6500/21W/80/SA	1177x71x108mm±1mm	6500	3415	21W	163	SA
191120	Lenyk Slim TRK120/3000/37W/80/TB	1177x71x108mm±1mm	3000	5615	37W	152	30°
191121	Lenyk Slim TRK120/4000/37W/80/TB	1177x71x108mm±1mm	4000	5850	37W	159	30°
191122	Lenyk Slim TRK120/5000/37W/80/TB	1177x71x108mm±1mm	5000	6010	37W	163	30°
191123	Lenyk Slim TRK120/6500/37W/80/TB	1177x71x108mm±1mm	6500	5850	37W	159	30°
191124	Lenyk Slim TRK120/3000/37W/80/NB	1177x71x108mm±1mm	3000	5575	37W	151	60°
191125	Lenyk Slim TRK120/4000/37W/80/NB	1177x71x108mm±1mm	4000	5810	37W	158	60°
191126	Lenyk Slim TRK120/5000/37W/80/NB	1177x71x108mm±1mm	5000	5965	37W	162	60°
191127	Lenyk Slim TRK120/6500/37W/80/NB	1177x71x108mm±1mm	6500	5810	37W	158	60°
191128	Lenyk Slim TRK120/3000/37W/80/WB	1177x71x108mm±1mm	3000	5600	37W	152	90°
191129	Lenyk Slim TRK120/4000/37W/80/WB	1177x71x108mm±1mm	4000	5835	37W	158	90°
191130	Lenyk Slim TRK120/5000/37W/80/WB	1177x71x108mm±1mm	5000	5995	37W	163	90°
191131	Lenyk Slim TRK120/6500/37W/80/WB	1177x71x108mm±1mm	6500	5835	37W	158	90°
191132	Lenyk Slim TRK120/3000/37W/80/DA	1177x71x108mm±1mm	3000	5575	37W	151	DA
191133	Lenyk Slim TRK120/4000/37W/80/DA	1177x71x108mm±1mm	4000	5810	37W	158	DA
191134	Lenyk Slim TRK120/5000/37W/80/DA	1177x71x108mm±1mm	5000	5965	37W	162	DA
191135	Lenyk Slim TRK120/6500/37W/80/DA	1177x71x108mm±1mm	6500	5810	37W	158	DA
191136	Lenyk Slim TRK120/3000/37W/80/SA	1177x71x108mm±1mm	3000	5345	37W	145	SA
191137	Lenyk Slim TRK120/4000/37W/80/SA	1177x71x108mm±1mm	4000	5570	37W	151	SA
191138	Lenyk Slim TRK120/5000/37W/80/SA	1177x71x108mm±1mm	5000	5720	37W	155	SA
191139	Lenyk Slim TRK120/6500/37W/80/SA	1177x71x108mm±1mm	6500	5570	37W	151	SA
191140	Lenyk Slim TRK120/3000/44W/80/TB	1177x71x108mm±1mm	3000	6525	44W	149	30°
191141	Lenyk Slim TRK120/4000/44W/80/TB	1177x71x108mm±1mm	4000	6800	44W	155	30°
191142	Lenyk Slim TRK120/5000/44W/80/TB	1177x71x108mm±1mm	5000	6985	44W	159	30°
191143	Lenyk Slim TRK120/6500/44W/80/TB	1177x71x108mm±1mm	6500	6800	44W	155	30°
191144	Lenyk Slim TRK120/3000/44W/80/NB	1177x71x108mm±1mm	3000	6480	44W	148	60°
191145	Lenyk Slim TRK120/4000/44W/80/NB	1177x71x108mm±1mm	4000	6750	44W	154	60°
191146	Lenyk Slim TRK120/5000/44W/80/NB	1177x71x108mm±1mm	5000	6935	44W	158	60°
191147	Lenyk Slim TRK120/6500/44W/80/NB	1177x71x108mm±1mm	6500	6750	44W	154	60°
191148	Lenyk Slim TRK120/3000/44W/80/WB	1177x71x108mm±1mm	3000	6505	44W	148	90°
191149	Lenyk Slim TRK120/4000/44W/80/WB	1177x71x108mm±1mm	4000	6780	44W	155	90°
191150	Lenyk Slim TRK120/5000/44W/80/WB	1177x71x108mm±1mm	5000	6965	44W	159	90°
191151	Lenyk Slim TRK120/6500/44W/80/WB	1177x71x108mm±1mm	6500	6780	44W	155	90°
191152	Lenyk Slim TRK120/3000/44W/80/DA	1177x71x108mm±1mm	3000	6480	44W	148	DA
191153	Lenyk Slim TRK120/4000/44W/80/DA	1177x71x108mm±1mm	4000	6750	44W	154	DA
191154	Lenyk Slim TRK120/5000/44W/80/DA	1177x71x108mm±1mm	5000	6935	44W	158	DA
191155	Lenyk Slim TRK120/6500/44W/80/DA	1177x71x108mm±1mm	6500	6750	44W	154	DA



SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
191156 Lenyk Slim TRK120/3000/44W/80/SA	1177x71x108mm±1mm	3000	6210	44W	142	SA
191157 Lenyk Slim TRK120/4000/44W/80/SA	1177x71x108mm±1mm	4000	6475	44W	148	SA
191158 Lenyk Slim TRK120/5000/44W/80/SA	1177x71x108mm±1mm	5000	6650	44W	152	SA
191159 Lenyk Slim TRK120/6500/44W/80/SA	1177x71x108mm±1mm	6500	6475	44W	148	SA
191160 Lenyk Slim TRK120/3000/50W/80/TB	1177x71x108mm±1mm	3000	8050	50W	161	30°
191161 Lenyk Slim TRK120/4000/50W/80/TB	1177x71x108mm±1mm	4000	8390	50W	168	30°
191162 Lenyk Slim TRK120/5000/50W/80/TB	1177x71x108mm±1mm	5000	8615	50W	173	30°
191163 Lenyk Slim TRK120/6500/50W/80/TB	1177x71x108mm±1mm	6500	8390	50W	168	30°
191164 Lenyk Slim TRK120/3000/50W/80/NB	1177x71x108mm±1mm	3000	7990	50W	160	60°
191165 Lenyk Slim TRK120/4000/50W/80/NB	1177x71x108mm±1mm	4000	8330	50W	167	60°
191166 Lenyk Slim TRK120/5000/50W/80/NB	1177x71x108mm±1mm	5000	8555	50W	172	60°
191167 Lenyk Slim TRK120/6500/50W/80/NB	1177x71x108mm±1mm	6500	8330	50W	167	60°
191168 Lenyk Slim TRK120/3000/50W/80/WB	1177x71x108mm±1mm	3000	8025	50W	161	90°
191169 Lenyk Slim TRK120/4000/50W/80/WB	1177x71x108mm±1mm	4000	8365	50W	168	90°
191170 Lenyk Slim TRK120/5000/50W/80/WB	1177x71x108mm±1mm	5000	8590	50W	172	90°
191171 Lenyk Slim TRK120/6500/50W/80/WB	1177x71x108mm±1mm	6500	8365	50W	168	90°
191172 Lenyk Slim TRK120/3000/50W/80/DA	1177x71x108mm±1mm	3000	7990	50W	160	DA
191173 Lenyk Slim TRK120/4000/50W/80/DA	1177x71x108mm±1mm	4000	8330	50W	167	DA
191174 Lenyk Slim TRK120/5000/50W/80/DA	1177x71x108mm±1mm	5000	8555	50W	172	DA
191175 Lenyk Slim TRK120/6500/50W/80/DA	1177x71x108mm±1mm	6500	8330	50W	167	DA
191176 Lenyk Slim TRK120/3000/50W/80/SA	1177x71x108mm±1mm	3000	7660	50W	154	SA
191177 Lenyk Slim TRK120/4000/50W/80/SA	1177x71x108mm±1mm	4000	7985	50W	160	SA
191178 Lenyk Slim TRK120/5000/50W/80/SA	1177x71x108mm±1mm	5000	8200	50W	164	SA
191179 Lenyk Slim TRK120/6500/50W/80/SA	1177x71x108mm±1mm	6500	7985	50W	160	SA
191180 Lenyk Slim TRK150/3000/26W/80/TB	1469x71x108mm±1mm	3000	4150	26W	160	30°
191181 Lenyk Slim TRK150/4000/26W/80/TB	1469x71x108mm±1mm	4000	4325	26W	167	30°
191182 Lenyk Slim TRK150/5000/26W/80/TB	1469x71x108mm±1mm	5000	4445	26W	171	30°
191183 Lenyk Slim TRK150/6500/26W/80/TB	1469x71x108mm±1mm	6500	4325	26W	167	30°
191184 Lenyk Slim TRK150/3000/26W/80/NB	1469x71x108mm±1mm	3000	4120	26W	159	60°
191185 Lenyk Slim TRK150/4000/26W/80/NB	1469x71x108mm±1mm	4000	4295	26W	166	60°
191186 Lenyk Slim TRK150/5000/26W/80/NB	1469x71x108mm±1mm	5000	4410	26W	170	60°
191187 Lenyk Slim TRK150/6500/26W/80/NB	1469x71x108mm±1mm	6500	4295	26W	166	60°
191188 Lenyk Slim TRK150/3000/26W/80/WB	1469x71x108mm±1mm	3000	4140	26W	160	90°
191189 Lenyk Slim TRK150/4000/26W/80/WB	1469x71x108mm±1mm	4000	4315	26W	166	90°
191190 Lenyk Slim TRK150/5000/26W/80/WB	1469x71x108mm±1mm	5000	4430	26W	171	90°
191191 Lenyk Slim TRK150/6500/26W/80/WB	1469x71x108mm±1mm	6500	4315	26W	166	90°
191192 Lenyk Slim TRK150/3000/26W/80/DA	1469x71x108mm±1mm	3000	4120	26W	159	DA
191193 Lenyk Slim TRK150/4000/26W/80/DA	1469x71x108mm±1mm	4000	4295	26W	166	DA
191194 Lenyk Slim TRK150/5000/26W/80/DA	1469x71x108mm±1mm	5000	4410	26W	170	DA
191195 Lenyk Slim TRK150/6500/26W/80/DA	1469x71x108mm±1mm	6500	4295	26W	166	DA
191196 Lenyk Slim TRK150/3000/26W/80/SA	1469x71x108mm±1mm	3000	3950	26W	152	SA
191197 Lenyk Slim TRK150/4000/26W/80/SA	1469x71x108mm±1mm	4000	4120	26W	159	SA
191198 Lenyk Slim TRK150/5000/26W/80/SA	1469x71x108mm±1mm	5000	4230	26W	163	SA
191199 Lenyk Slim TRK150/6500/26W/80/SA	1469x71x108mm±1mm	6500	4120	26W	159	SA
191200 Lenyk Slim TRK150/3000/35W/80/TB	1469x71x108mm±1mm	3000	5445	35W	156	30°
191201 Lenyk Slim TRK150/4000/35W/80/TB	1469x71x108mm±1mm	4000	5680	35W	163	30°
191202 Lenyk Slim TRK150/5000/35W/80/TB	1469x71x108mm±1mm	5000	5830	35W	167	30°
191203 Lenyk Slim TRK150/6500/35W/80/TB	1469x71x108mm±1mm	6500	5680	35W	163	30°
191204 Lenyk Slim TRK150/3000/35W/80/NB	1469x71x108mm±1mm	3000	5360	35W	154	60°
191205 Lenyk Slim TRK150/4000/35W/80/NB	1469x71x108mm±1mm	4000	5585	35W	160	60°
191206 Lenyk Slim TRK150/5000/35W/80/NB	1469x71x108mm±1mm	5000	5740	35W	164	60°
191207 Lenyk Slim TRK150/6500/35W/80/NB	1469x71x108mm±1mm	6500	5585	35W	160	60°

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
191208 Lenyk Slim TRK150/3000/35W/80/WB	1469x71x108mm±1mm	3000	5385	35W	154	90°
191209 Lenyk Slim TRK150/4000/35W/80/WB	1469x71x108mm±1mm	4000	5610	35W	161	90°
191210 Lenyk Slim TRK150/5000/35W/80/WB	1469x71x108mm±1mm	5000	5765	35W	165	90°
191211 Lenyk Slim TRK150/6500/35W/80/WB	1469x71x108mm±1mm	6500	5610	35W	161	90°
191212 Lenyk Slim TRK150/3000/35W/80/DA	1469x71x108mm±1mm	3000	5360	35W	154	DA
191213 Lenyk Slim TRK150/4000/35W/80/DA	1469x71x108mm±1mm	4000	5585	35W	160	DA
191214 Lenyk Slim TRK150/5000/35W/80/DA	1469x71x108mm±1mm	5000	5740	35W	164	DA
191215 Lenyk Slim TRK150/6500/35W/80/DA	1469x71x108mm±1mm	6500	5585	35W	160	DA
191216 Lenyk Slim TRK150/3000/35W/80/SA	1469x71x108mm±1mm	3000	5115	35W	147	SA
191217 Lenyk Slim TRK150/4000/35W/80/SA	1469x71x108mm±1mm	4000	5335	35W	153	SA
191218 Lenyk Slim TRK150/5000/35W/80/SA	1469x71x108mm±1mm	5000	5480	35W	157	SA
191219 Lenyk Slim TRK150/6500/35W/80/SA	1469x71x108mm±1mm	6500	5335	35W	153	SA
191220 Lenyk Slim TRK150/3000/45W/80/TB	1469x71x108mm±1mm	3000	6905	45W	154	30°
191221 Lenyk Slim TRK150/4000/45W/80/TB	1469x71x108mm±1mm	4000	7195	45W	160	30°
191222 Lenyk Slim TRK150/5000/45W/80/TB	1469x71x108mm±1mm	5000	7390	45W	165	30°
191223 Lenyk Slim TRK150/6500/45W/80/TB	1469x71x108mm±1mm	6500	7195	45W	160	30°
191224 Lenyk Slim TRK150/3000/45W/80/NB	1469x71x108mm±1mm	3000	6795	45W	151	60°
191225 Lenyk Slim TRK150/4000/45W/80/NB	1469x71x108mm±1mm	4000	7080	45W	158	60°
191226 Lenyk Slim TRK150/5000/45W/80/NB	1469x71x108mm±1mm	5000	7275	45W	162	60°
191227 Lenyk Slim TRK150/6500/45W/80/NB	1469x71x108mm±1mm	6500	7080	45W	158	60°
191228 Lenyk Slim TRK150/3000/45W/80/WB	1469x71x108mm±1mm	3000	6825	45W	152	90°
191229 Lenyk Slim TRK150/4000/45W/80/WB	1469x71x108mm±1mm	4000	7115	45W	159	90°
191230 Lenyk Slim TRK150/5000/45W/80/WB	1469x71x108mm±1mm	5000	7305	45W	163	90°
191231 Lenyk Slim TRK150/6500/45W/80/WB	1469x71x108mm±1mm	6500	7115	45W	159	90°
191232 Lenyk Slim TRK150/3000/45W/80/DA	1469x71x108mm±1mm	3000	6795	45W	151	DA
191233 Lenyk Slim TRK150/4000/45W/80/DA	1469x71x108mm±1mm	4000	7080	45W	158	DA
191234 Lenyk Slim TRK150/5000/45W/80/DA	1469x71x108mm±1mm	5000	7275	45W	162	DA
191235 Lenyk Slim TRK150/6500/45W/80/DA	1469x71x108mm±1mm	6500	7080	45W	158	DA
191236 Lenyk Slim TRK150/3000/45W/80/SA	1469x71x108mm±1mm	3000	6485	45W	145	SA
191237 Lenyk Slim TRK150/4000/45W/80/SA	1469x71x108mm±1mm	4000	6760	45W	151	SA
191238 Lenyk Slim TRK150/5000/45W/80/SA	1469x71x108mm±1mm	5000	6945	45W	155	SA
191239 Lenyk Slim TRK150/6500/45W/80/SA	1469x71x108mm±1mm	6500	6760	45W	151	SA
191240 Lenyk Slim TRK150/3000/53W/80/TB	1469x71x108mm±1mm	3000	7785	53W	147	30°
191241 Lenyk Slim TRK150/4000/53W/80/TB	1469x71x108mm±1mm	4000	8115	53W	154	30°
191242 Lenyk Slim TRK150/5000/53W/80/TB	1469x71x108mm±1mm	5000	8335	53W	158	30°
191243 Lenyk Slim TRK150/6500/53W/80/TB	1469x71x108mm±1mm	6500	8115	53W	154	30°
191244 Lenyk Slim TRK150/3000/53W/80/NB	1469x71x108mm±1mm	3000	7665	53W	145	60°
191245 Lenyk Slim TRK150/4000/53W/80/NB	1469x71x108mm±1mm	4000	7985	53W	151	60°
191246 Lenyk Slim TRK150/5000/53W/80/NB	1469x71x108mm±1mm	5000	8200	53W	155	60°
191247 Lenyk Slim TRK150/6500/53W/80/NB	1469x71x108mm±1mm	6500	7985	53W	151	60°
191248 Lenyk Slim TRK150/3000/53W/80/WB	1469x71x108mm±1mm	3000	7695	53W	146	90°
191249 Lenyk Slim TRK150/4000/53W/80/WB	1469x71x108mm±1mm	4000	8020	53W	152	90°
191250 Lenyk Slim TRK150/5000/53W/80/WB	1469x71x108mm±1mm	5000	8240	53W	156	90°
191251 Lenyk Slim TRK150/6500/53W/80/WB	1469x71x108mm±1mm	6500	8020	53W	152	90°
191252 Lenyk Slim TRK150/3000/53W/80/DA	1469x71x108mm±1mm	3000	7665	53W	145	DA
191253 Lenyk Slim TRK150/4000/53W/80/DA	1469x71x108mm±1mm	4000	7985	53W	151	DA
191254 Lenyk Slim TRK150/5000/53W/80/DA	1469x71x108mm±1mm	5000	8200	53W	155	DA
191255 Lenyk Slim TRK150/6500/53W/80/DA	1469x71x108mm±1mm	6500	7985	53W	151	DA
191256 Lenyk Slim TRK150/3000/53W/80/SA	1469x71x108mm±1mm	3000	7315	53W	139	SA
191257 Lenyk Slim TRK150/4000/53W/80/SA	1469x71x108mm±1mm	4000	7625	53W	144	SA
191258 Lenyk Slim TRK150/5000/53W/80/SA	1469x71x108mm±1mm	5000	7830	53W	148	SA
191259 Lenyk Slim TRK150/6500/53W/80/SA	1469x71x108mm±1mm	6500	7625	53W	144	SA



## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
191260 Lenyk Slim TRK150/3000/62W/80/TB	1469x71x108mm±1mm	3000	9085	62W	147	30°
191261 Lenyk Slim TRK150/4000/62W/80/TB	1469x71x108mm±1mm	4000	9470	62W	153	30°
191262 Lenyk Slim TRK150/5000/62W/80/TB	1469x71x108mm±1mm	5000	9725	62W	157	30°
191263 Lenyk Slim TRK150/6500/62W/80/TB	1469x71x108mm±1mm	6500	9470	62W	153	30°
191264 Lenyk Slim TRK150/3000/62W/80/NB	1469x71x108mm±1mm	3000	9020	62W	146	60°
191265 Lenyk Slim TRK150/4000/62W/80/NB	1469x71x108mm±1mm	4000	9400	62W	152	60°
191266 Lenyk Slim TRK150/5000/62W/80/NB	1469x71x108mm±1mm	5000	9655	62W	156	60°
191267 Lenyk Slim TRK150/6500/62W/80/NB	1469x71x108mm±1mm	6500	9400	62W	152	60°
191268 Lenyk Slim TRK150/3000/62W/80/WB	1469x71x108mm±1mm	3000	9060	62W	147	90°
191269 Lenyk Slim TRK150/4000/62W/80/WB	1469x71x108mm±1mm	4000	9440	62W	153	90°
191270 Lenyk Slim TRK150/5000/62W/80/WB	1469x71x108mm±1mm	5000	9695	62W	157	90°
191271 Lenyk Slim TRK150/6500/62W/80/WB	1469x71x108mm±1mm	6500	9440	62W	153	90°
191272 Lenyk Slim TRK150/3000/62W/80/DA	1469x71x108mm±1mm	3000	9020	62W	146	DA
191273 Lenyk Slim TRK150/4000/62W/80/DA	1469x71x108mm±1mm	4000	9400	62W	152	DA
191274 Lenyk Slim TRK150/5000/62W/80/DA	1469x71x108mm±1mm	5000	9655	62W	156	DA
191275 Lenyk Slim TRK150/6500/62W/80/DA	1469x71x108mm±1mm	6500	9400	62W	152	DA
191276 Lenyk Slim TRK150/3000/62W/80/SA	1469x71x108mm±1mm	3000	8650	62W	140	SA
191277 Lenyk Slim TRK150/4000/62W/80/SA	1469x71x108mm±1mm	4000	9015	62W	146	SA
191278 Lenyk Slim TRK150/5000/62W/80/SA	1469x71x108mm±1mm	5000	9260	62W	150	SA
191279 Lenyk Slim TRK150/6500/62W/80/SA	1469x71x108mm±1mm	6500	9015	62W	146	SA