

## Lenyk IL

### SURFACED MOUNTED & SUSPENDED | TEC SERIES

Lenyk IL is a flexible luminaire suitable to fulfill a wide range of lighting tasks in the industrial or retail sectors. With various luminous flux packages and optics. Lenyk IL has LED modules encased in individual lenses, placed within a sleek and modern aluminum housing that merges with all the industrial environments. The individual lenses ensure that the beam can be precisely targeted towards the desired objects, irrespective of the mounting height. This features brings the benefit of little-wasted light, and thus, of lower energy usage.

Lenyk IL has several series, determined by various add-on and control:


- **Lenyk IL TEC: the standard for industrial, DIY and retail spaces**
- Lenyk IL ECO-DALI: with DALI dimming
- Lenyk IL TEC EM: with emergency lighting kit
- Lenyk IL ECO-DALI EM: with dimming and emergency kit

### FEATURES & BENEFITS

- CRI  $\geq$  80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K, 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 171 lm/w @4000K
- Wide range of lens angles: WB (Wide Beam - 90°), NB (Narrow Beam - 60°), TB (Tight Beam - 30°), DA (Double Asymmetric)

### APPLICATION

Grocery & Supermarket | Retail | DIY

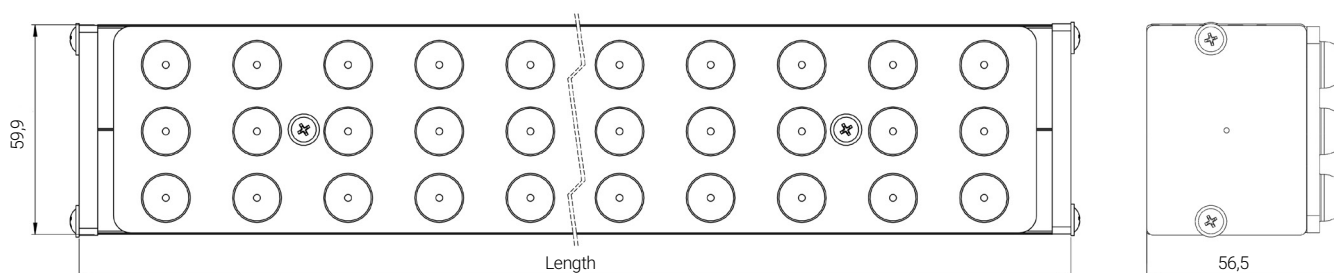


SPECIFICATIONS

Power consumption	20W	20W, 34W, 41W, 49W	25W, 33W, 42W, 51W, 60W
Dimensions	607 x 56.5 x 59.9 ± 1mm	1201 x 56.5 x 59.9 ± 1mm	1498 x 56.5 x 59.9 ± 1mm
Weight	1.5Kg	2.4Kg	2.9Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<8%		
Protection class	Safety class 1		
Operating temperature [°C]	-20 ... +45 °C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	30°, 60°, 90°, DA		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	For product information please see <b>Lenyk IL ECO-DALI</b> datasheet		
Warranty [years]	5		
Storage temperature range [°C]	-20...+55°C / -4F ... +131F		
Emergency option	For product information please see <b>Lenyk IL TEC EM</b> datasheet		

Light application	Standard
CRI	CRI 80
CCT [K]	3000K/4000K/5000K/6500K
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION

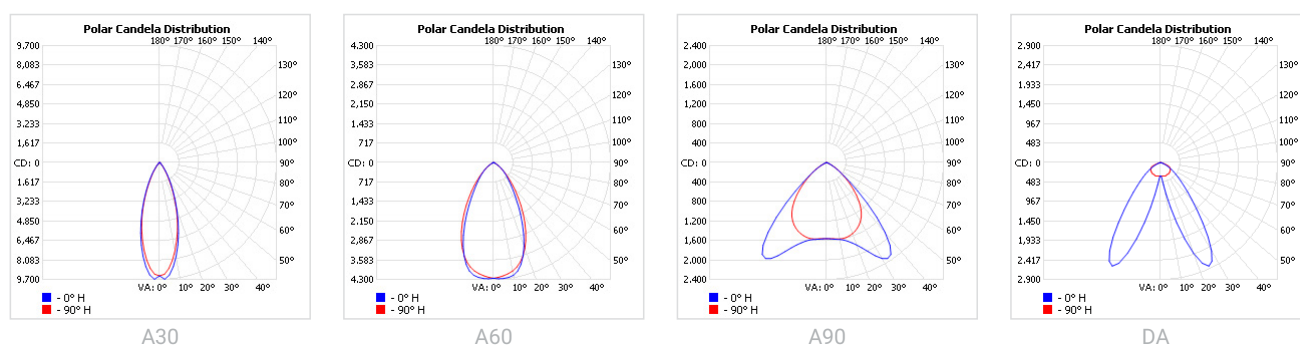

**RISK GROUP****RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

**TOLERANCES**

**Luminous flux tolerances:** -/+ 5%

**Consumption tolerance:** -/+ 5% for TEC | -/+ 10% for TEC & KIT EM | -/+ 10% for ECO-DALI | -/+ 15% for ECO-DALI & KIT EM

**BATTERY WARRANTY**

**TEC EM & ECO EM:** 12 months warranty

**TEC & ECO:** -

**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Power	Driver type	Control type	Circuit Breaker Type						
			Amperage	B			C		
				20	16	10	20	16	10
< 50W		TEC		37	30	18	62	51	31
≥ 50W		TEC		37	30	18	62	51	31
< 80W		ECO		27	21	13	45	35	21

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
116508 Lenyk IL 60/3000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	3000	2890	20W	145	90°
116509 Lenyk IL 60/4000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	4000	3010	20W	151	90°
116510 Lenyk IL 60/5000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	5000	3090	20W	155	90°
116511 Lenyk IL 60/6500/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	6500	3010	20W	151	90°
116800 Lenyk IL 60/3000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	60°
116801 Lenyk IL 60/4000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	60°
116802 Lenyk IL 60/5000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	60°
116803 Lenyk IL 60/6500/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	60°
116804 Lenyk IL 60/3000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	3000	2895	20W	145	30°
116805 Lenyk IL 60/4000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	4000	3020	20W	151	30°
116806 Lenyk IL 60/5000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	5000	3100	20W	155	30°
116807 Lenyk IL 60/6500/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	6500	3020	20W	151	30°
116808 Lenyk IL 60/3000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	DA
116809 Lenyk IL 60/4000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	DA
116810 Lenyk IL 60/5000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	DA
116811 Lenyk IL 60/6500/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	DA
116196 Lenyk IL 120/3000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	3280	20W	164	30°
116197 Lenyk IL 120/4000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	3420	20W	171	30°
116198 Lenyk IL 120/5000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	3510	20W	176	30°
116199 Lenyk IL 120/6500/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	3420	20W	171	30°
116000 Lenyk IL 120/3000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	60°
116001 Lenyk IL 120/4000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	60°
116002 Lenyk IL 120/5000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	60°
116003 Lenyk IL 120/6500/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	60°
116004 Lenyk IL 120/3000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	3270	20W	164	90°
116005 Lenyk IL 120/4000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	3410	20W	171	90°
116006 Lenyk IL 120/5000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	3500	20W	175	90°
116007 Lenyk IL 120/6500/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	3410	20W	171	90°
116008 Lenyk IL 120/3000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	DA
116009 Lenyk IL 120/4000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	DA
116010 Lenyk IL 120/5000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	DA
116011 Lenyk IL 120/6500/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	DA
116200 Lenyk IL 120/3000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	5190	34W	153	30°
116201 Lenyk IL 120/4000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	5410	34W	160	30°
116202 Lenyk IL 120/5000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	5555	34W	164	30°
116203 Lenyk IL 120/6500/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	5410	34W	160	30°
116012 Lenyk IL 120/3000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	60°
116013 Lenyk IL 120/4000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	60°
116014 Lenyk IL 120/5000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	60°
116015 Lenyk IL 120/6500/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	60°
116016 Lenyk IL 120/3000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	5175	34W	153	90°
116017 Lenyk IL 120/4000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	5395	34W	159	90°
116018 Lenyk IL 120/5000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	5540	34W	163	90°
116019 Lenyk IL 120/6500/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	5395	34W	159	90°
116020 Lenyk IL 120/3000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	DA
116021 Lenyk IL 120/4000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	DA
116022 Lenyk IL 120/5000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	DA
116023 Lenyk IL 120/6500/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	DA
116204 Lenyk IL 120/3000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	6080	41W	149	30°
116205 Lenyk IL 120/4000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	6335	41W	155	30°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
116206 Lenyk IL 120/5000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	6510	41W	159	30°
116207 Lenyk IL 120/6500/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	6335	41W	155	30°
116024 Lenyk IL 120/3000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	60°
116025 Lenyk IL 120/4000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	60°
116026 Lenyk IL 120/5000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	60°
116027 Lenyk IL 120/6500/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	60°
116028 Lenyk IL 120/3000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	6065	41W	148	90°
116029 Lenyk IL 120/4000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	6320	41W	155	90°
116030 Lenyk IL 120/5000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	6490	41W	159	90°
116031 Lenyk IL 120/6500/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	6320	41W	155	90°
116032 Lenyk IL 120/3000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	DA
116033 Lenyk IL 120/4000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	DA
116034 Lenyk IL 120/5000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	DA
116035 Lenyk IL 120/6500/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	DA
116208 Lenyk IL 120/3000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	7885	49W	161	30°
116209 Lenyk IL 120/4000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	8220	49W	168	30°
116210 Lenyk IL 120/5000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	8445	49W	173	30°
116211 Lenyk IL 120/6500/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	8220	49W	168	30°
116036 Lenyk IL 120/3000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	60°
116037 Lenyk IL 120/4000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	60°
116038 Lenyk IL 120/5000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	60°
116039 Lenyk IL 120/6500/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	60°
116040 Lenyk IL 120/3000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	7865	49W	161	90°
116041 Lenyk IL 120/4000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	8200	49W	168	90°
116042 Lenyk IL 120/5000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	8420	49W	172	90°
116043 Lenyk IL 120/6500/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	8200	49W	168	90°
116044 Lenyk IL 120/3000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	DA
116045 Lenyk IL 120/4000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	DA
116046 Lenyk IL 120/5000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	DA
116047 Lenyk IL 120/6500/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	DA
116180 Lenyk IL 150/3000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	3990	25W	160	30°
116181 Lenyk IL 150/4000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	4160	25W	167	30°
116182 Lenyk IL 150/5000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	4275	25W	171	30°
116183 Lenyk IL 150/6500/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	4160	25W	167	30°
116184 Lenyk IL 150/3000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	60°
116185 Lenyk IL 150/4000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	60°
116186 Lenyk IL 150/5000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	60°
116187 Lenyk IL 150/6500/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	60°
116188 Lenyk IL 150/3000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	3980	25W	160	90°
116189 Lenyk IL 150/4000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	4150	25W	166	90°
116190 Lenyk IL 150/5000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	4260	25W	171	90°
116191 Lenyk IL 150/6500/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	4150	25W	166	90°
116192 Lenyk IL 150/3000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	DA
116193 Lenyk IL 150/4000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	DA
116194 Lenyk IL 150/5000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	DA
116195 Lenyk IL 150/6500/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	DA
116212 Lenyk IL 150/3000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	5045	33W	153	30°
116213 Lenyk IL 150/4000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	5260	33W	160	30°
116214 Lenyk IL 150/5000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	5400	33W	164	30°
116215 Lenyk IL 150/6500/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	5260	33W	160	30°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
116048 Lenyk IL 150/3000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	60°
116049 Lenyk IL 150/4000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	60°
116050 Lenyk IL 150/5000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	60°
116051 Lenyk IL 150/6500/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	60°
116052 Lenyk IL 150/3000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	4985	33W	152	90°
116053 Lenyk IL 150/4000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	5195	33W	158	90°
116054 Lenyk IL 150/5000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	5340	33W	162	90°
116055 Lenyk IL 150/6500/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	5195	33W	158	90°
116056 Lenyk IL 150/3000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	DA
116057 Lenyk IL 150/4000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	DA
116058 Lenyk IL 150/5000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	DA
116059 Lenyk IL 150/6500/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	DA
116216 Lenyk IL 150/3000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	6445	42W	154	30°
116217 Lenyk IL 150/4000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	6720	42W	160	30°
116218 Lenyk IL 150/5000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	6900	42W	165	30°
116219 Lenyk IL 150/6500/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	6720	42W	160	30°
116060 Lenyk IL 150/3000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	60°
116061 Lenyk IL 150/4000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	60°
116062 Lenyk IL 150/5000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	60°
116063 Lenyk IL 150/6500/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	60°
116064 Lenyk IL 150/3000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	6370	42W	152	90°
116065 Lenyk IL 150/4000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	6640	42W	159	90°
116066 Lenyk IL 150/5000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	6820	42W	163	90°
116067 Lenyk IL 150/6500/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	6640	42W	159	90°
116068 Lenyk IL 150/3000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	DA
116069 Lenyk IL 150/4000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	DA
116070 Lenyk IL 150/5000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	DA
116071 Lenyk IL 150/6500/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	DA
116220 Lenyk IL 150/3000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	7495	51W	147	30°
116221 Lenyk IL 150/4000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	7810	51W	154	30°
116222 Lenyk IL 150/5000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	8020	51W	158	30°
116223 Lenyk IL 150/6500/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	7810	51W	154	30°
116072 Lenyk IL 150/3000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	145	60°
116073 Lenyk IL 150/4000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	151	60°
116074 Lenyk IL 150/5000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	155	60°
116075 Lenyk IL 150/6500/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	151	60°
116076 Lenyk IL 150/3000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	7405	51W	146	90°
116077 Lenyk IL 150/4000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	7720	51W	152	90°
116078 Lenyk IL 150/5000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	7930	51W	156	90°
116079 Lenyk IL 150/6500/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	7720	51W	152	90°
116080 Lenyk IL 150/3000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	139	DA
116081 Lenyk IL 150/4000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	144	DA
116082 Lenyk IL 150/5000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	148	DA
116083 Lenyk IL 150/6500/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	144	DA
116224 Lenyk IL 150/3000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	8790	60W	147	30°
116225 Lenyk IL 150/4000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	9160	60W	153	30°
116226 Lenyk IL 150/5000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	9410	60W	157	30°
116227 Lenyk IL 150/6500/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	9160	60W	153	30°
116084 Lenyk IL 150/3000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	60°
116085 Lenyk IL 150/4000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	60°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
116086 Lenyk IL 150/5000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	60°
116087 Lenyk IL 150/6500/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	60°
116088 Lenyk IL 150/3000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	8765	60W	147	90°
116089 Lenyk IL 150/4000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	9135	60W	153	90°
116090 Lenyk IL 150/5000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	9385	60W	157	90°
116091 Lenyk IL 150/6500/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	9135	60W	153	90°
116092 Lenyk IL 150/3000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	DA
116093 Lenyk IL 150/4000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	DA
116094 Lenyk IL 150/5000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	DA
116095 Lenyk IL 150/6500/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	DA
161508 Lenyk IL/S 60/3000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	3000	2890	20W	145	90°
161509 Lenyk IL/S 60/4000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	4000	3010	20W	151	90°
161510 Lenyk IL/S 60/5000/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	5000	3090	20W	155	90°
161511 Lenyk IL/S 60/6500/20W/80/WB	607 x 56.5 x 59.9 ± 1mm	6500	3010	20W	151	90°
161800 Lenyk IL/S 60/3000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	60°
161801 Lenyk IL/S 60/4000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	60°
161802 Lenyk IL/S 60/5000/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	60°
161803 Lenyk IL/S 60/6500/20W/80/NB	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	60°
161804 Lenyk IL/S 60/3000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	3000	2895	20W	145	30°
161805 Lenyk IL/S 60/4000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	4000	3020	20W	151	30°
161806 Lenyk IL/S 60/5000/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	5000	3100	20W	155	30°
161807 Lenyk IL/S 60/6500/20W/80/TB	607 x 56.5 x 59.9 ± 1mm	6500	3020	20W	151	30°
161808 Lenyk IL/S 60/3000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	3000	2875	20W	144	DA
161809 Lenyk IL/S 60/4000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	4000	2995	20W	150	DA
161810 Lenyk IL/S 60/5000/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	5000	3075	20W	154	DA
161811 Lenyk IL/S 60/6500/20W/80/DA	607 x 56.5 x 59.9 ± 1mm	6500	2995	20W	150	DA
161196 Lenyk IL/S 120/3000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	3280	20W	164	30°
161197 Lenyk IL/S 120/4000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	3420	20W	171	30°
161198 Lenyk IL/S 120/5000/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	3510	20W	176	30°
161199 Lenyk IL/S 120/6500/20W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	3420	20W	171	30°
161000 Lenyk IL/S 120/3000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	60°
161001 Lenyk IL/S 120/4000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	60°
161002 Lenyk IL/S 120/5000/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	60°
161003 Lenyk IL/S 120/6500/20W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	60°
161004 Lenyk IL/S 120/3000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	3270	20W	164	90°
161005 Lenyk IL/S 120/4000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	3410	20W	171	90°
161006 Lenyk IL/S 120/5000/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	3500	20W	175	90°
161007 Lenyk IL/S 120/6500/20W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	3410	20W	171	90°
161008 Lenyk IL/S 120/3000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	3255	20W	163	DA
161009 Lenyk IL/S 120/4000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	3395	20W	170	DA
161010 Lenyk IL/S 120/5000/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	3485	20W	175	DA
161011 Lenyk IL/S 120/6500/20W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	3395	20W	170	DA
161200 Lenyk IL/S 120/3000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	5190	34W	153	30°
161201 Lenyk IL/S 120/4000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	5410	34W	160	30°
161202 Lenyk IL/S 120/5000/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	5555	34W	164	30°
161203 Lenyk IL/S 120/6500/34W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	5410	34W	160	30°
161012 Lenyk IL/S 120/3000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	60°
161013 Lenyk IL/S 120/4000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	60°
161014 Lenyk IL/S 120/5000/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	60°
161015 Lenyk IL/S 120/6500/34W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	60°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
161016 Lenyk IL/S 120/3000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	5175	34W	153	90°
161017 Lenyk IL/S 120/4000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	5395	34W	159	90°
161018 Lenyk IL/S 120/5000/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	5540	34W	163	90°
161019 Lenyk IL/S 120/6500/34W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	5395	34W	159	90°
161020 Lenyk IL/S 120/3000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	5150	34W	152	DA
161021 Lenyk IL/S 120/4000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	5370	34W	158	DA
161022 Lenyk IL/S 120/5000/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	5515	34W	163	DA
161023 Lenyk IL/S 120/6500/34W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	5370	34W	158	DA
161204 Lenyk IL/S 120/3000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	6080	41W	149	30°
161205 Lenyk IL/S 120/4000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	6335	41W	155	30°
161206 Lenyk IL/S 120/5000/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	6510	41W	159	30°
161207 Lenyk IL/S 120/6500/41W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	6335	41W	155	30°
161024 Lenyk IL/S 120/3000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	60°
161025 Lenyk IL/S 120/4000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	60°
161026 Lenyk IL/S 120/5000/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	60°
161027 Lenyk IL/S 120/6500/41W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	60°
161028 Lenyk IL/S 120/3000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	6065	41W	148	90°
161029 Lenyk IL/S 120/4000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	6320	41W	155	90°
161030 Lenyk IL/S 120/5000/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	6490	41W	159	90°
161031 Lenyk IL/S 120/6500/41W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	6320	41W	155	90°
161032 Lenyk IL/S 120/3000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	6035	41W	148	DA
161033 Lenyk IL/S 120/4000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	6290	41W	154	DA
161034 Lenyk IL/S 120/5000/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	6460	41W	158	DA
161035 Lenyk IL/S 120/6500/41W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	6290	41W	154	DA
161208 Lenyk IL/S 120/3000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	3000	7885	49W	161	30°
161209 Lenyk IL/S 120/4000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	4000	8220	49W	168	30°
161210 Lenyk IL/S 120/5000/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	5000	8445	49W	173	30°
161211 Lenyk IL/S 120/6500/49W/80/TB	1201 x 56.5 x 59.9 ± 1mm	6500	8220	49W	168	30°
161036 Lenyk IL/S 120/3000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	60°
161037 Lenyk IL/S 120/4000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	60°
161038 Lenyk IL/S 120/5000/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	60°
161039 Lenyk IL/S 120/6500/49W/80/NB	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	60°
161040 Lenyk IL/S 120/3000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	3000	7865	49W	161	90°
161041 Lenyk IL/S 120/4000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	4000	8200	49W	168	90°
161042 Lenyk IL/S 120/5000/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	5000	8420	49W	172	90°
161043 Lenyk IL/S 120/6500/49W/80/WB	1201 x 56.5 x 59.9 ± 1mm	6500	8200	49W	168	90°
161044 Lenyk IL/S 120/3000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	3000	7830	49W	160	DA
161045 Lenyk IL/S 120/4000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	4000	8160	49W	167	DA
161046 Lenyk IL/S 120/5000/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	5000	8380	49W	172	DA
161047 Lenyk IL/S 120/6500/49W/80/DA	1201 x 56.5 x 59.9 ± 1mm	6500	8160	49W	167	DA
161180 Lenyk IL/S 150/3000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	3990	25W	160	30°
161181 Lenyk IL/S 150/4000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	4160	25W	167	30°
161182 Lenyk IL/S 150/5000/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	4275	25W	171	30°
161183 Lenyk IL/S 150/6500/25W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	4160	25W	167	30°
161184 Lenyk IL/S 150/3000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	60°
161185 Lenyk IL/S 150/4000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	60°
161186 Lenyk IL/S 150/5000/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	60°
161187 Lenyk IL/S 150/6500/25W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	60°
161188 Lenyk IL/S 150/3000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	3980	25W	160	90°
161189 Lenyk IL/S 150/4000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	4150	25W	166	90°



## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
161190 Lenyk IL/S 150/5000/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	4260	25W	171	90°
161191 Lenyk IL/S 150/6500/25W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	4150	25W	166	90°
161192 Lenyk IL/S 150/3000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	3965	25W	159	DA
161193 Lenyk IL/S 150/4000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	4130	25W	166	DA
161194 Lenyk IL/S 150/5000/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	4240	25W	170	DA
161195 Lenyk IL/S 150/6500/25W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	4130	25W	166	DA
161212 Lenyk IL/S 150/3000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	5045	33W	153	30°
161213 Lenyk IL/S 150/4000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	5260	33W	160	30°
161214 Lenyk IL/S 150/5000/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	5400	33W	164	30°
161215 Lenyk IL/S 150/6500/33W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	5260	33W	160	30°
161048 Lenyk IL/S 150/3000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	60°
161049 Lenyk IL/S 150/4000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	60°
161050 Lenyk IL/S 150/5000/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	60°
161051 Lenyk IL/S 150/6500/33W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	60°
161052 Lenyk IL/S 150/3000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	4985	33W	152	90°
161053 Lenyk IL/S 150/4000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	5195	33W	158	90°
161054 Lenyk IL/S 150/5000/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	5340	33W	162	90°
161055 Lenyk IL/S 150/6500/33W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	5195	33W	158	90°
161056 Lenyk IL/S 150/3000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	4965	33W	151	DA
161057 Lenyk IL/S 150/4000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	5175	33W	157	DA
161058 Lenyk IL/S 150/5000/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	5315	33W	162	DA
161059 Lenyk IL/S 150/6500/33W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	5175	33W	157	DA
161216 Lenyk IL/S 150/3000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	6445	42W	154	30°
161217 Lenyk IL/S 150/4000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	6720	42W	160	30°
161218 Lenyk IL/S 150/5000/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	6900	42W	165	30°
161219 Lenyk IL/S 150/6500/42W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	6720	42W	160	30°
161060 Lenyk IL/S 150/3000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	60°
161061 Lenyk IL/S 150/4000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	60°
161062 Lenyk IL/S 150/5000/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	60°
161063 Lenyk IL/S 150/6500/42W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	60°
161064 Lenyk IL/S 150/3000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	6370	42W	152	90°
161065 Lenyk IL/S 150/4000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	6640	42W	159	90°
161066 Lenyk IL/S 150/5000/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	6820	42W	163	90°
161067 Lenyk IL/S 150/6500/42W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	6640	42W	159	90°
161068 Lenyk IL/S 150/3000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	6340	42W	151	DA
161069 Lenyk IL/S 150/4000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	6610	42W	158	DA
161070 Lenyk IL/S 150/5000/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	6790	42W	162	DA
161071 Lenyk IL/S 150/6500/42W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	6610	42W	158	DA
161220 Lenyk IL/S 150/3000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	7495	51W	147	30°
161221 Lenyk IL/S 150/4000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	7810	51W	154	30°
161222 Lenyk IL/S 150/5000/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	8020	51W	158	30°
161223 Lenyk IL/S 150/6500/51W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	7810	51W	154	30°
161072 Lenyk IL/S 150/3000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	145	60°
161073 Lenyk IL/S 150/4000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	151	60°
161074 Lenyk IL/S 150/5000/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	155	60°
161075 Lenyk IL/S 150/6500/51W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	151	60°
161076 Lenyk IL/S 150/3000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	7405	51W	146	90°
161077 Lenyk IL/S 150/4000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	7720	51W	152	90°
161078 Lenyk IL/S 150/5000/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	7930	51W	156	90°
161079 Lenyk IL/S 150/6500/51W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	7720	51W	152	90°

## SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
<b>CRI 80</b>						
161080 Lenyk IL/S 150/3000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	7375	51W	139	DA
161081 Lenyk IL/S 150/4000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	7685	51W	144	DA
161082 Lenyk IL/S 150/5000/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	7895	51W	148	DA
161083 Lenyk IL/S 150/6500/51W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	7685	51W	144	DA
161224 Lenyk IL/S 150/3000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	3000	8790	60W	147	30°
161225 Lenyk IL/S 150/4000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	4000	9160	60W	153	30°
161226 Lenyk IL/S 150/5000/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	5000	9410	60W	157	30°
161227 Lenyk IL/S 150/6500/60W/80/TB	1498 x 56.5 x 59.9 ± 1mm	6500	9160	60W	153	30°
161084 Lenyk IL/S 150/3000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	60°
161085 Lenyk IL/S 150/4000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	60°
161086 Lenyk IL/S 150/5000/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	60°
161087 Lenyk IL/S 150/6500/60W/80/NB	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	60°
161088 Lenyk IL/S 150/3000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	3000	8765	60W	147	90°
161089 Lenyk IL/S 150/4000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	4000	9135	60W	153	90°
161090 Lenyk IL/S 150/5000/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	5000	9385	60W	157	90°
161091 Lenyk IL/S 150/6500/60W/80/WB	1498 x 56.5 x 59.9 ± 1mm	6500	9135	60W	153	90°
161092 Lenyk IL/S 150/3000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	3000	8725	60W	146	DA
161093 Lenyk IL/S 150/4000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	4000	9095	60W	152	DA
161094 Lenyk IL/S 150/5000/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	5000	9340	60W	156	DA
161095 Lenyk IL/S 150/6500/60W/80/DA	1498 x 56.5 x 59.9 ± 1mm	6500	9095	60W	152	DA