



Lenyk PC TRK

TRACK LINEAR | DALI SERIES

Track mounted linear luminaire highly suitable for lighting tasks in the logistic & industrial, DIY and retail sectors. Lenyk PC TRK has LED modules encased in a clear polycarbonate case, placed on a sleek and modern aluminum housing, that blends with all the industrial environments. Lenyk PC TRK provides optimum lighting and the injected polycarbonate casing offers high mechanical strength and shock resistance.

The track-mounted solution brings enhanced flexibility to industrial illumination. The track allows for T, L and X connections.

Lenyk PC TRK has several series, determined by various add-on and controls:


- Lenyk PC TRK Non-DALI: the standard series for industrial, logistic, DIY and retail sectors
- Lenyk PC TRK DALI: with DALI dimming

FEATURES & BENEFITS

- CRI ≥ 80 as standard
- 4 color temperatures: 3000K, 4000K, 5000K and 6500K
- Long rated life: L90/B10@50.000h
- Very high efficiency: 146 lm/W @4000K
- Dimmable

APPLICATION

Retail | Industrial & Logistic | DIY

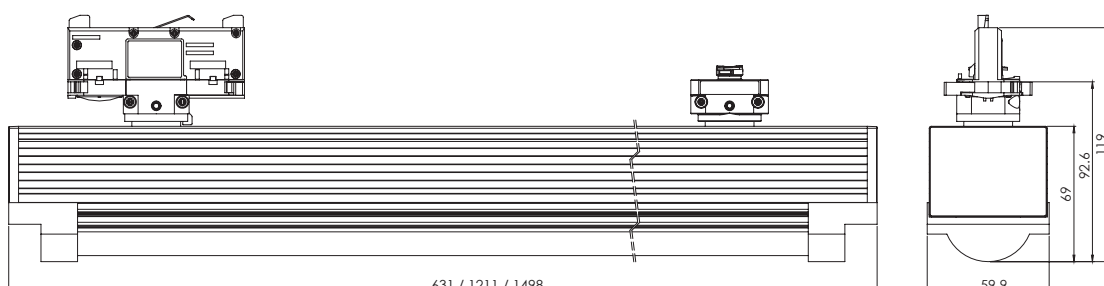


SPECIFICATIONS

Power consumption	20W	15W, 25W, 32W, 38W, 50W	23W, 33W, 37W, 50W, 60W
Dimensions	631 x 92.6 x 59.9 ± 1mm	1211 x 92.6 x 59.9 ± 1mm	1498 x 92.6 x 59.9 ± 1mm
Weight	1.2 Kg	2.1 Kg	2.8 Kg
Housing materials	Aluminum & Polycarbonate		
IK code	IK04		
THD (at 230V, 50Hz, Full load)	<9%		
Protection class	Safety class 1		
Operating temperature [°C]	-20°C ... +45°C / -4F ... +113F		
Operating humidity [%]	10 ÷ 85		
Power factor	≥0.95		
AC Input [Vac]	220 - 240 VAC		
Lens angle [°]	120°		
Lifespan [h]	50,000		
Housing color	● Anodised grey		
Lumen maintenance	L90/B10@50.000h at 25°C		
IP factor	IP20		
Control optional	DALI		
Warranty [years]	5		
Storage temperature range [°C]	-20°C ... +55°C / -4F ... +131F		
Emergency option	-		

#	Standard
CRI	CRI80
CCT [K]	3000 / 4000 / 5000 / 6500
MacAdam	4

CRI - Color rendering, CCT - Color temperature, MacAdam - Color consistency

LIGHT DISTRIBUTION



TOLERANCES**Luminous flux tolerances:** -/+ 5%**Consumption tolerance:** -/+ 5% for Non-DALI | -/+ 10% for Non-DALI & KIT EM | -/+ 10% for DALI | -/+ 15% for DALI & KIT EM**BATTERY WARRANTY****Non-DALI EM & DALI EM:** 12 months warranty**Non-DALI & DALI:** -**MAXIMUM NO. OF LUMINAIRES ON A CIRCUIT**

Luminaire Power [W]	Control type	Circuit Breaker Type					
		B			C		
		20	16	10	20	16	10
<50W	Non-DALI	38	30	19	62	51	31
≥ 50W	Non-DALI	38	30	19	62	51	31
<80W	DALI	27	21	13	45	35	21

RISK GROUP**Standard (CRI80)** RG1**FOOD (BVF, FBS, FSM)** RG1**FOOD ≤35W (FZM, FSH)** RG1**FOOD >35W (FZM, FSH)** RG2**FAS** RG1**AMB2200** RG1**ART** RG1**AGI** RG1**CRI90** RG1**CRI95** RG1**ENT** RG1**RG1**

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Low Risk (RG1 – No photobiological hazard under normal behavioral limitations)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

RG2

The evaluation of photobiological safety is carried out according to the standard IEC 62471:2008 ("Photobiological safety of lamps and lamp systems"). Following the definition of the risk grouping system of the mentioned IEC standard, the LEDs mounted on this family fall into the class "Moderate Risk (RG2)". Under real circumstances (regarding exposure time, pupils, observation distance), it is assumed that there is no endangerment to the eye from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect.

SKU SPECIFICATIONS

Product Code	Dimensions (mm)	CCT (K)	Lumens (lm)	Power (W)	Eff. (lm/watt)	Lens Angle (°)
CRI 80						
265504 Lenyk PC 60TRK/3000/20W/80/FL	631 x 92.6 x 59.9 ± 1mm	3000	2365	20W	119	120°
265505 Lenyk PC 60TRK/4000/20W/80/FL	631 x 92.6 x 59.9 ± 1mm	4000	2465	20W	124	120°
265506 Lenyk PC 60TRK/5000/20W/80/FL	631 x 92.6 x 59.9 ± 1mm	5000	2530	20W	127	120°
265507 Lenyk PC 60TRK/6500/20W/80/FL	631 x 92.6 x 59.9 ± 1mm	6500	2465	20W	124	120°
265096 Lenyk PC 120TRK/3000/15W/80/FL	1211 x 92.6 x 59.9 ± 1mm	3000	1945	15W	130	120°
265097 Lenyk PC 120TRK/4000/15W/80/FL	1211 x 92.6 x 59.9 ± 1mm	4000	2025	15W	135	120°
265098 Lenyk PC 120TRK/5000/15W/80/FL	1211 x 92.6 x 59.9 ± 1mm	5000	2080	15W	139	120°
265099 Lenyk PC 120TRK/6500/15W/80/FL	1211 x 92.6 x 59.9 ± 1mm	6500	2025	15W	135	120°
265108 Lenyk PC 120TRK/3000/25W/80/FL	1211 x 92.6 x 59.9 ± 1mm	3000	3240	25W	130	120°
265109 Lenyk PC 120TRK/4000/25W/80/FL	1211 x 92.6 x 59.9 ± 1mm	4000	3375	25W	135	120°
265110 Lenyk PC 120TRK/5000/25W/80/FL	1211 x 92.6 x 59.9 ± 1mm	5000	3465	25W	139	120°
265111 Lenyk PC 120TRK/6500/25W/80/FL	1211 x 92.6 x 59.9 ± 1mm	6500	3375	25W	135	120°
265120 Lenyk PC 120TRK/3000/32W/80/FL	1211 x 92.6 x 59.9 ± 1mm	3000	4155	32W	130	120°
265121 Lenyk PC 120TRK/4000/32W/80/FL	1211 x 92.6 x 59.9 ± 1mm	4000	4330	32W	136	120°
265122 Lenyk PC 120TRK/5000/32W/80/FL	1211 x 92.6 x 59.9 ± 1mm	5000	4445	32W	139	120°
265123 Lenyk PC 120TRK/6500/32W/80/FL	1211 x 92.6 x 59.9 ± 1mm	6500	4330	32W	136	120°
265132 Lenyk PC 120TRK/3000/38W/80/FL	1211 x 92.6 x 59.9 ± 1mm	3000	4915	38W	130	120°
265133 Lenyk PC 120TRK/4000/38W/80/FL	1211 x 92.6 x 59.9 ± 1mm	4000	5120	38W	135	120°
265134 Lenyk PC 120TRK/5000/38W/80/FL	1211 x 92.6 x 59.9 ± 1mm	5000	5260	38W	139	120°
265135 Lenyk PC 120TRK/6500/38W/80/FL	1211 x 92.6 x 59.9 ± 1mm	6500	5120	38W	135	120°
265144 Lenyk PC 120TRK/3000/50W/80/FL	1211 x 92.6 x 59.9 ± 1mm	3000	6030	50W	121	120°
265145 Lenyk PC 120TRK/4000/50W/80/FL	1211 x 92.6 x 59.9 ± 1mm	4000	6285	50W	126	120°
265146 Lenyk PC 120TRK/5000/50W/80/FL	1211 x 92.6 x 59.9 ± 1mm	5000	6455	50W	130	120°
265147 Lenyk PC 120TRK/6500/50W/80/FL	1211 x 92.6 x 59.9 ± 1mm	6500	6285	50W	126	120°
265156 Lenyk PC 150TRK/3000/23W/80/FL	1498 x 92.6 x 59.9 ± 1mm	3000	3155	23W	138	120°
265157 Lenyk PC 150TRK/4000/23W/80/FL	1498 x 92.6 x 59.9 ± 1mm	4000	3290	23W	144	120°
265158 Lenyk PC 150TRK/5000/23W/80/FL	1498 x 92.6 x 59.9 ± 1mm	5000	3380	23W	147	120°
265159 Lenyk PC 150TRK/6500/23W/80/FL	1498 x 92.6 x 59.9 ± 1mm	6500	3290	23W	144	120°
265168 Lenyk PC 150TRK/3000/33W/80/FL	1498 x 92.6 x 59.9 ± 1mm	3000	4610	33W	140	120°
265169 Lenyk PC 150TRK/4000/33W/80/FL	1498 x 92.6 x 59.9 ± 1mm	4000	4805	33W	146	120°
265170 Lenyk PC 150TRK/5000/33W/80/FL	1498 x 92.6 x 59.9 ± 1mm	5000	4935	33W	150	120°
265171 Lenyk PC 150TRK/6500/33W/80/FL	1498 x 92.6 x 59.9 ± 1mm	6500	4805	33W	146	120°
265228 Lenyk PC 150TRK/3000/37W/80/FL	1498 x 92.6 x 59.9 ± 1mm	3000	4975	37W	135	120°
265229 Lenyk PC 150TRK/4000/37W/80/FL	1498 x 92.6 x 59.9 ± 1mm	4000	5185	37W	141	120°
265230 Lenyk PC 150TRK/5000/37W/80/FL	1498 x 92.6 x 59.9 ± 1mm	5000	5325	37W	144	120°
265231 Lenyk PC 150TRK/6500/37W/80/FL	1498 x 92.6 x 59.9 ± 1mm	6500	5185	37W	141	120°
265240 Lenyk PC 150TRK/3000/50W/80/FL	1498 x 92.6 x 59.9 ± 1mm	3000	6395	50W	128	120°
265241 Lenyk PC 150TRK/4000/50W/80/FL	1498 x 92.6 x 59.9 ± 1mm	4000	6665	50W	134	120°
265242 Lenyk PC 150TRK/5000/50W/80/FL	1498 x 92.6 x 59.9 ± 1mm	5000	6845	50W	137	120°
265243 Lenyk PC 150TRK/6500/50W/80/FL	1498 x 92.6 x 59.9 ± 1mm	6500	6665	50W	134	120°
265252 Lenyk PC 150TRK/3000/60W/80/FL	1498 x 92.6 x 59.9 ± 1mm	3000	7500	60W	125	120°
265253 Lenyk PC 150TRK/4000/60W/80/FL	1498 x 92.6 x 59.9 ± 1mm	4000	7815	60W	131	120°
265254 Lenyk PC 150TRK/5000/60W/80/FL	1498 x 92.6 x 59.9 ± 1mm	5000	8030	60W	134	120°
265255 Lenyk PC 150TRK/6500/60W/80/FL	1498 x 92.6 x 59.9 ± 1mm	6500	7815	60W	131	120°

Technical specifications can be modified without prior notice. All information is property of Greentek Lighting.

The presentation picture is for information purposes only. Latest document update: November 19, 2019 11:17 AM. www.greentek.eu